
MILITARY SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRICAL, TRIAXIAL, RADIO FREQUENCY, (SERIES TRB, SOCKET CONTACT, JAMNUT MOUNTED, CLASS 2) HERMETIC AND NONHERMETIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-C-49142.

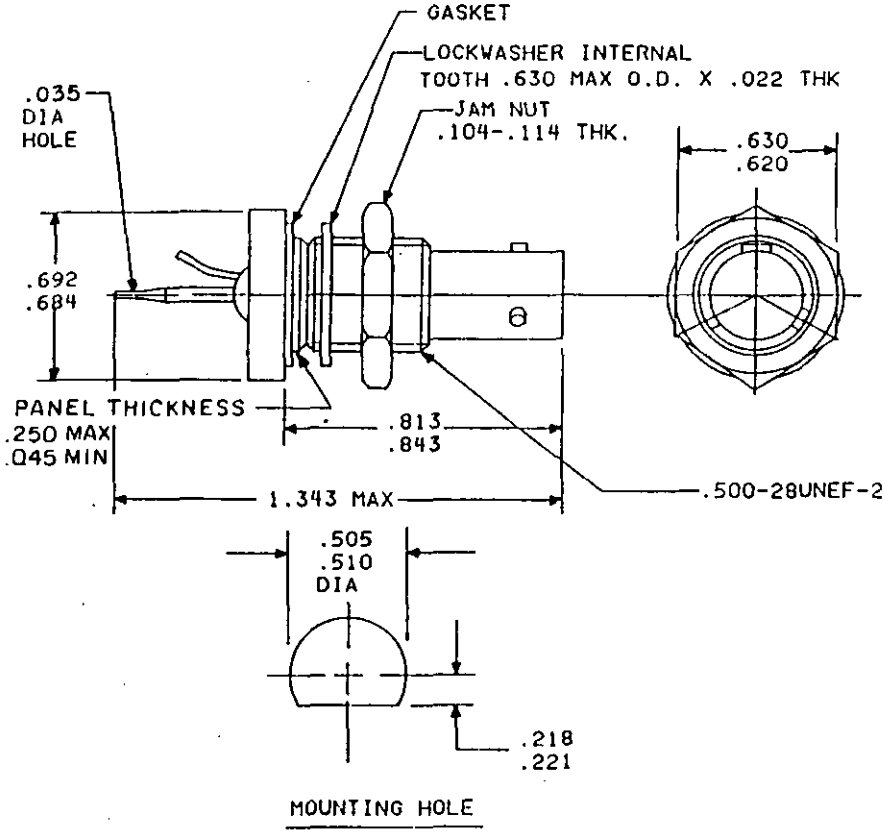

MOUNTING HOLE


Inches	mm
.022	.56
.035	.88
.045	1.14
.104	2.64
.114	2.90
.218	5.54
.221	5.61
.250	6.35
.500	12.70
.505	12.71
.510	12.95
.620	15.75
.630	16.00
.684	17.37
.692	17.58
.813	20.65
.843	21.41
1.343	34.11

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Wrench flats are to accommodate standard wrench openings per H-28, appendix 10.
4. All undimensioned pictorial representations are for reference purposes only.
5. Panel thickness, .045 (1.14 mm) minimum, .250 maximum.
6. Unless otherwise specified all tolerances are ±.005 inch.

FIGURE 1. General configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:50Z
Check the source to verify that this is the current version before use.

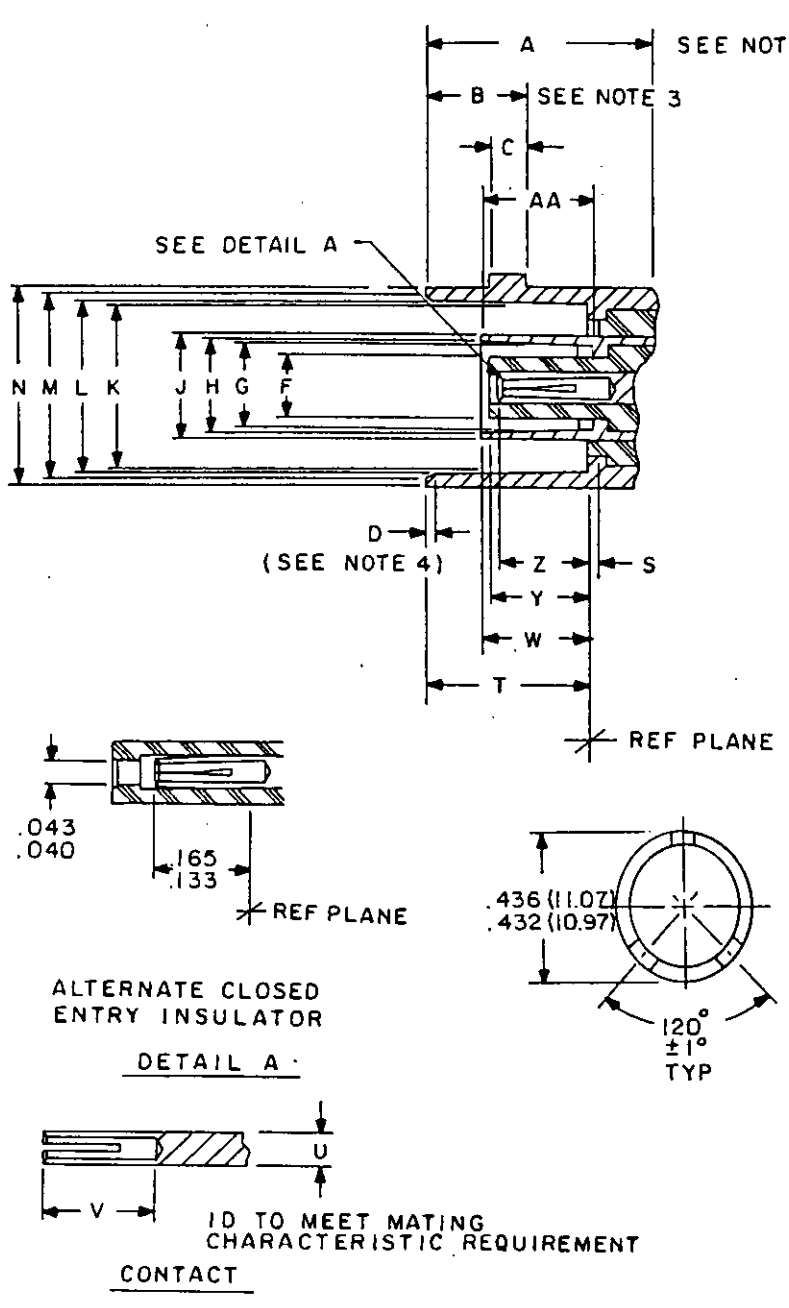

Ltr	Inches		Millimeters	
	Min	Max	Min	Max
A	.414	---	10.52	---
AA	.206	.213	5.23	5.41
B	.204	.208	5.18	5.28
C	.075	.081	1.90	2.05
D	.015	.030	0.38	0.76
F	.117	.122	2.97	3.10
G	.169	.171	4.11	4.25
H	.178	.182	4.52	4.62
J	.195	.199	4.95	5.05
K	.319	.321	8.10	8.15
L	.327	.333	8.31	8.46
M	.346	.356	8.79	9.04
N	.378	.382	9.60	9.70
S	.001	---	0.03	---
T	.327	.335	8.31	8.51
U	.062	.064	1.57	1.63
V	.213	---	5.41	---
W	.187	.213	4.75	5.41
Y	---	.213	---	5.41
Z	.165	.203	4.19	5.16
AA	.208	.213	5.23	5.41

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. .005 (0.13 mm) flat permissible to meet dimension B.
4. Chamfer or radius.
5. Metric equivalents are in parentheses or tabulated.
6. Clearance for mating connector coupling nut.

FIGURE 2. Interface series TRB. socket contact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:50Z
Check the source to verify that this is the current version before use.

ENGINEERING DATA:

Nominal impedance: Nonconstant.

Frequency range: 0 to 500 MHz minimum.

Voltage rating: 400 V rms, maximum working voltage at sea level. 100 V rms, maximum working voltage at 70,000 feet.

Temperature range: -65°C to +165°C.

REQUIREMENTS:

Dimensions and configuration: See figures 1 and 2.

Force to engage and disengage:
Longitudinal force - 4 pounds maximum.
Torque - 2.5 inch-pounds maximum.

Coupling proof torque: Not applicable.

Mating characteristics: See figure 2 for dimensions.

Center contact (socket):
Oversize test pin - 0.40 inch diameter minimum (nonclosed entry contacts only).
Insertion depth - .125 inch minimum.
Number of insertions - 1.

Insertion force test:
Steel test pin finish - 16 microinches.
Insertion force - 2 pounds maximum.
Steel test pin diameter - .039 minimum +.001 inch.

Withdrawal force test:
Steel test pin diameter - .037 maximum -.001 inch.
Withdrawal force - 2 ounces minimum.
Test pin finish - 16 microinches.

Permeability: Applicable.

Hermetic seal: See table I.

Leakage: Connector shall be mounted in mounting hole shown on figure 1 with mating end capped. Air pressure - 30 lb_f/in^2.

Insulation resistance: 5000 megohms.

Conductor retention: 6 pounds minimum, axial force.

Dielectric withstanding voltage:. At sea level, 1200 V rms, between center conductor and intermediate conductor. 500 V rms, between intermediate conductor and outer conductor.

Corrosion (salt spray): Applicable.

Vibration: Applicable.

Shock: Applicable.

Thermal shock: Applicable.

Moisture resistance: Applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:50Z
Check the source to verify that this is the current version before use.

Conductor resistance: In milliohms maximum.

	Connector dash number	Initial	After environment
Center conductor	0004	2.0	2.5
	0005	4.4	4.9
Intermediate conductor	0004	0.5	0.6
	0005	1.0	1.5
Outer conductor	0004	0.5	0.6
	0005	0.5	0.6

Corona level:
Altitude - 70,000 feet.
Voltage - 200 V rms minimum.

RF high potential withstanding voltage:
800 V rms, between center conductor and intermediate conductor.
200 V rms, between intermediate conductor and outer conductor at 5 to 7.5 MHz.

Leakage current: Not applicable.

Cable retention: Not applicable.

Coupling mechanism: Not applicable.

Rise time degradation: Not applicable.

Connector durability: 500 cycles per minute, maximum at 12 cycles per minute.

Part number M49142/04- (Dash number from table I.)

Not for Naval Air Systems Command (AS) use.

Revision letters are not used to denote changes due to the extensiveness of the changes.

TABLE I. Cross reference of part numbers.

Dash number	Superseded part number
-0004	M49142/04-0001, -0002
-0005 (hermetic seal)	M49142/04-0003

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - OS, SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT
Navy - AS, MC
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3662-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:50Z
Check the source to verify that this is the current version before use.