
MILITARY SPECIFICATION SHEET

ADAPTER, CONNECTOR, COAXIAL, RADIO FREQUENCY, IN-LINE, JAMNUT MOUNTED (BETWEEN SERIES BNC JACK TO SERIES N JACK), CLASS 2

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the adapter described herein shall consist of this specification and the latest issue of MIL-A-55339.

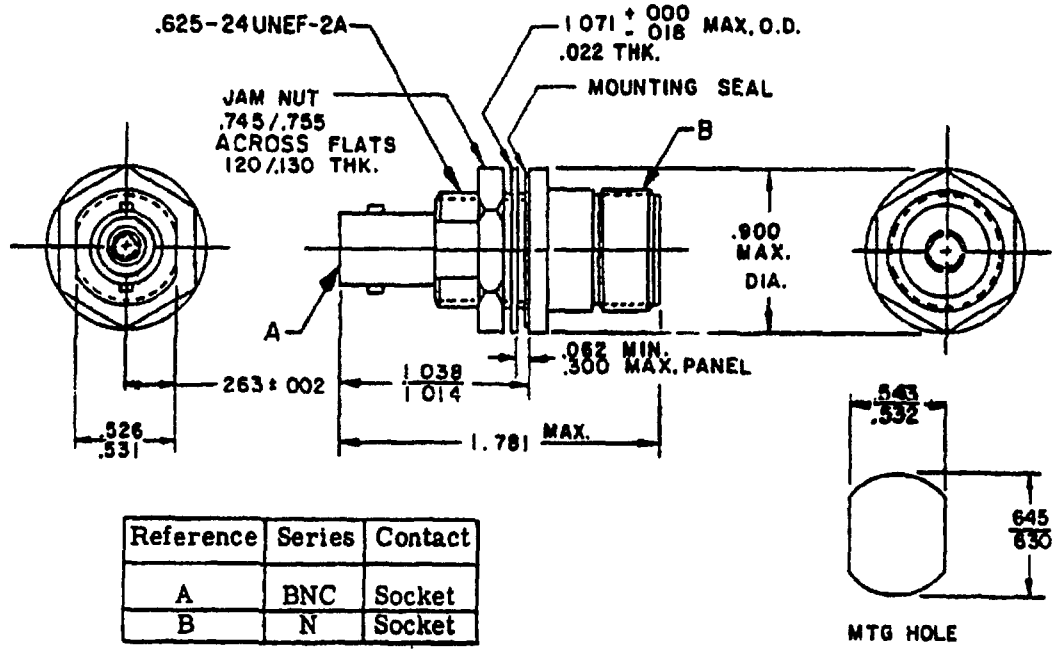

Reference	Series	Contact
A	BNC	Socket
B	N	Socket

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. All undimensioned pictorial representations are for reference purposes only.
4. (B) Interfaces shall be per MIL-STD-348.

Inches	mm	Inches	mm
.002	0.05	.543	13.79
.018	0.46	.625	15.88
.022	0.56	.630	16.00
.062	1.57	.645	16.38
.120	3.05	.745	18.92
.130	3.30	.755	19.18
.263	6.68	.900	22.86
.300	7.62	1.014	25.76
.526	13.36	1.038	26.37
.531	13.49	1.071	27.20
.532	13.51	1.781	45.24

FIGURE 1. General configuration.

(B) denotes changes

Source: https://assist.dla.mil -- Downloaded: 20261O-22T23:06Z
Check the source to verify that this is the current version before use.

DESIGN AND CONSTRUCTION:

General configuration: See figure 1.

Impedance: 50 ohms, nominal.

Working voltage:

Sea level: 500 V rms.
70,000 feet: 125 V rms.

Frequency range: 0 to 4 GHz.

Temperature range: -65°C to +165°C.

PERFORMANCE (installation torque of 6 to 10 inch-pounds, series N):

(B) Dimensions: See figure 1 and MIL-STD-348.

Center contact retention:

	Series BNC	Series N
Axial force (pounds, minimum)	6	6
Torque (ounce-inch, minimum)	N/A	N/A

Force to engage and disengage:

	Series BNC	Series N
Longitudinal force (pounds, maximum)	3.0	N/A
Torque (inch-pounds, maximum)	2.5	6.0

Coupling proof torque: Not applicable.

Mating characteristics:

Center contact (socket):	Series BNC	Series N
(B) Oversize test pin diameter (inch, minimum)	.057	.074
Insertion depth (inch, minimum)	.125	.125
Number of insertions	1	1
Maximum test pin (insertion force test):		
Steel test pin diameter (inch, minimum)	.054	.066
Pin finish (microinches)	16	16
Insertion force (pounds, maximum)	2	2
Number of insertions	1	1
Minimum test pin (withdrawal force):		
Steel test pin diameter (inch, maximum)	.052	.063
Pin finish (microinches)	16	16
Withdrawal force (ounces, minimum)	2	2
Number of withdrawals	1	1

Outer contact: Not applicable.

Permeability: < 2.0.

Seal:

Hermetic: Not applicable.
Pressurized: 30 psi minimum.
Weatherproof: 30 lbf/in^2.

Insulation resistance: 5,000 megohms, minimum.

Voltage standing wave ratio (VSWR): 1.30, maximum at .5 to 4 gigahertz (GHz).

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:06Z
Check the source to verify that this is the current version before use.

RF leakage (total): -55 dB, minimum, 2 to 3 GHz.

RF insertion loss: .2 dB, maximum, 3 GHz.
(.012 $\sqrt{F\ (GHz)}$ dB maximum tested at 3 GHz).

Durability: 500 cycles minimum at 12 cycles per minute maximum.

Dielectric withstanding test voltage: 1,500 V rms, minimum (sea level).

Contact resistance (milliohms, maximum):

Contact	Initial	After
Center	2.0	2.5
Outer	0.2	N/A

Vibration, high frequency: Interruptions, 1 microsecond (µs) maximum.

Shock: Test condition I.

Thermal shock: Test condition C.

Moisture resistance: 200 megohms, minimum.

Corona level:

Voltage: 375 V, minimum.
Altitude: 70,000 feet, minimum.

RF high potential withstanding voltage:

RF voltage: 1,000 V rms, minimum.
Frequency: 5 megahertz (MHz), minimum.

Salt spray (corrosion): Applicable.

Coupling mechanism retention force: Not applicable.

MARKING: As specified in MIL-A-55339.

Part number: M55339/25-00606.

Cross reference: See table I.

TABLE I. Cross reference of part numbers.

Part number	Superseded part number or type designation 1/
M55339/25-00606	51C12929 UG-606/U

1/ The superseded part number or the type designation is for cross reference only. Where a superseded part number or type designation is not given, none was assigned or will be assigned. The part number M55339/25-00606 shall be used in all cases for marking and identifying the adapter.

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:06Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - OS, SH
Air Force - 11, 99
DLA - ES

User activities:
Army - AT
Navy - AS, MC, SH
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3601-01)

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:06Z
Check the source to verify that this is the current version before use.