
MILITARY SPECIFICATION SHEET

RESOLVER, ELECTRICAL, LINEAR:
TYPE 26V-08L3554A

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the linear resolver described herein shall consist of this document and the latest issue of Specification MIL-R-50781.

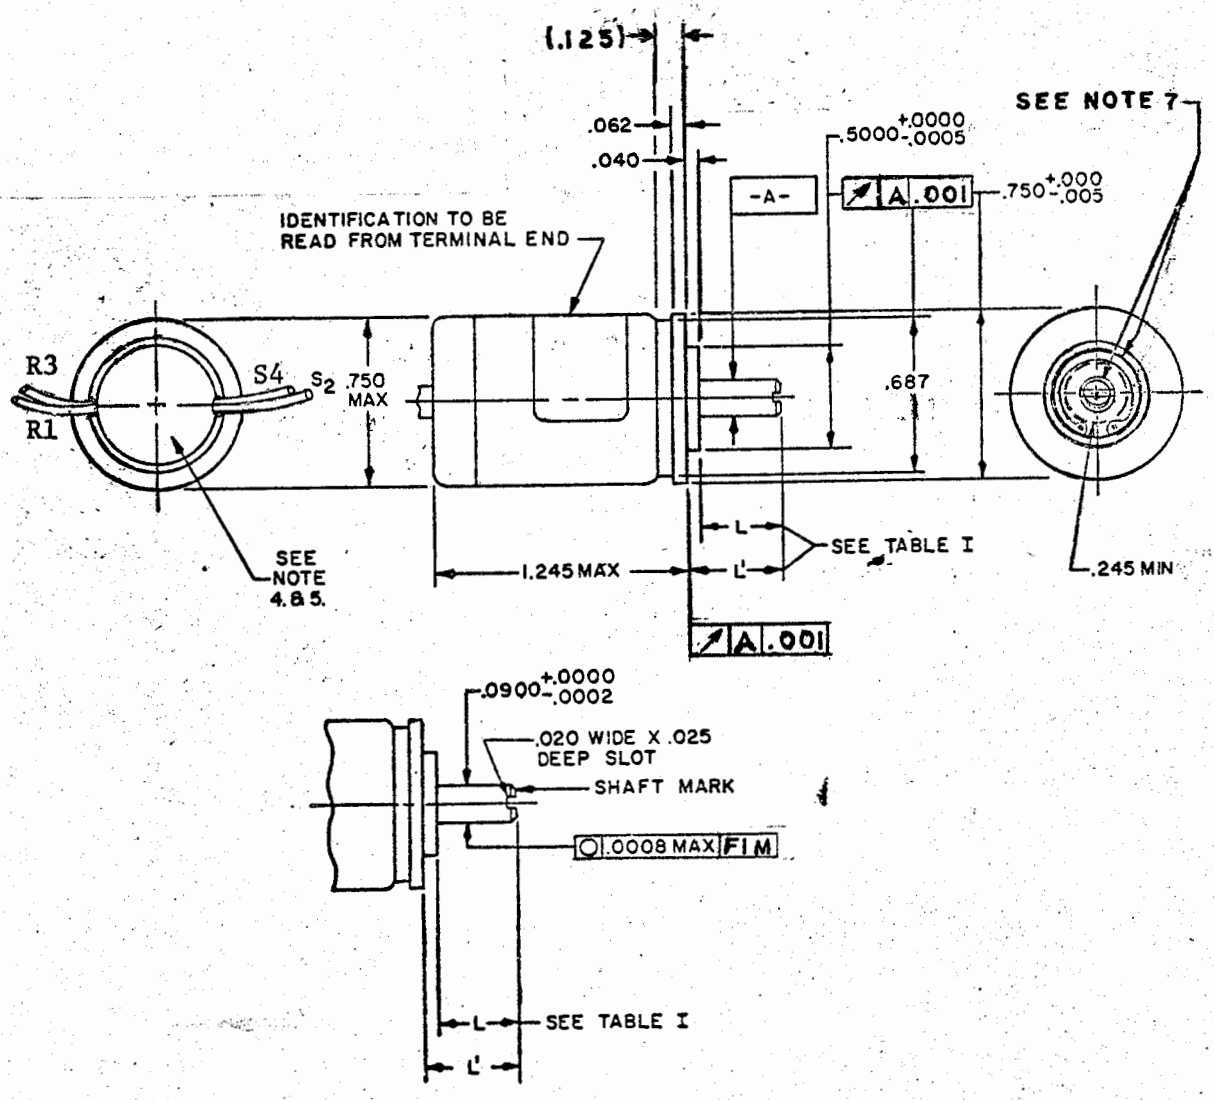

Source: https://assist.dla.mil - Downloaded: 2026-10-22T20:37Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.

2. Unless otherwise specified, tolerances on decimals are $\pm$ .005 and angles $\pm$ 2°.

3. Perpendicularity and concentricity shall be measured with the unit in a vertical position supported by the shaft, then the housing rotated.

4. Terminal lead wires shall depart through the back surface of the terminal end of the linear resolver in any acceptable manner.

5. Minor variations of unit configuration are permitted for undimensioned design detail.

6. Pending issuance of a qualified products list (QPL) a sample of the linear resolvers to be furnished under this specification shall be subjected to the first article requirements as specified in MIL-R-50781.

7. Mark on housing and shaft mark will bear no relation to the center lines shown on drawing.

8. For information only see synchro clamp assembly MS 17183 or equal.

9. Wire leads shall be type E-28.

10. Dimensioning and tolerancing are in accordance with ANSI Y14.5-1973.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:37Z
Check the source to verify that this is the current version before use.

RESOLVER, ELECTRICAL, LINEAR: TYPE 08L3554A

PERFORMANCE REQUIREMENTS AND CHARACTERISTICS

	Requirement	Value	Unit	Tolerance
1.	Energization winding	Rotor		
2.	Rated frequency	400	Hz	±1%
3.	Supply voltage	26	volts (rms)	±1%
	Test voltage	26	volts (rms)	±1%
4.	Current	110	milliamps	nominal
5.	Power	0.70	watts	nominal
6.	dc Resistance			
	Rotor	39	ohms	±15%
	Stator	53	ohms	±15%
7.	Transformation ratio	1.0121 (max coupling)		nominal
8.	Impedance		ohms	R±15%+jx±10%
	Z_{RO}	50+j230		
	Z_{SO}	64+259		
9.	Effective electrical travel	±55	degrees	
10.	Voltage gradient	0.343	volts/degree	±2%
11.	Linearity error	0.23	%	maximum
12.	Phase shift	10	degrees	±0.75
13.	Residual (null) voltage		mV(rms) output	maximum
	Fundamental	20		
	Total	30		
14.	Shift of linear resolver zero with frequency variation	±0.1	minutes	maximum
15.	Temperature rise	10	degrees (C)	maximum
16.	Friction torque (mechanical breakaway torque)	0.04	Oz-In	maximum
	@ -55°C	0.1	Oz-In	maximum
17.	Radial play	0.0004 (for reversal of 1/4 lb load)	inches	maximum
18.	End play	0.0001-0.0015 (for reversal of 1/2 lb load)	inches	Min-Max

Part number: The part number consists of the basic number of this specification sheet and a dash number taken from Table I.

Example: M50781/1-01

Basic document number — Spec sheet number — Dash number from Table I

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:37Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND CHARACTERISTICS

Dash No.	Shaft diameter	Shaft style	Termination	Shaft length	
				L(ref)	L' - dim to first mounting flange surface (+.010)
-01	.120	Plain	Wire leads	.325	.365

Custodians:
Army - MU
Navy - AS
Air Force - 85

Review activities:
Army - EL, AV
Navy - AS, TD, EC
Air Force - 80
DSA - ES

User activities:
Army - WC
Navy - None
Air Force - 11, 17

Preparing activity:
Army - MU

(Project 5990-0301)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:37Z
Check the source to verify that this is the current version before use.