MIL-C-24231/23E(SH)
15 May 1987
SUPERSEDING
MIL-C-24231/23D(SHIPS)
30 August 1976
(See note 3)

MILITARY SPECIFICATION SHEET

CONNECTOR, PLUG, TYPE I, MOLDED, THREE-CONDUCTOR, FOR THOF-9 CABLE


This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the molded plug described herein shall consist of this specification and the latest issue of MIL-C-24231.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

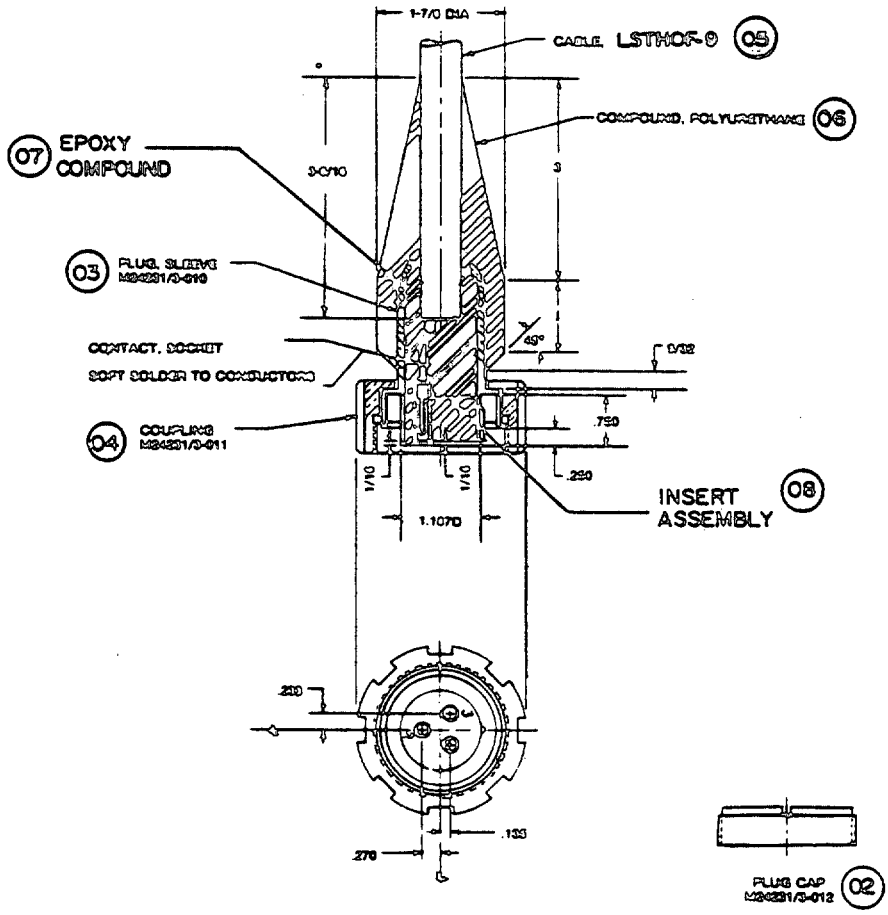

SH 9690

FIGURE 1. Connector, plug, molded (3-conductor, size 12 socket) M24231/23-001 symbol no. 713.9 and protective cap.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item 1/ no.	Description 2/	Quantity for M24231/23- 3/ 001	Material/specification	Remarks
01	Plug, molded 3-connector, symbol no. 713.9	1	-----	See figure 1
02	Cap, protective	1	M24231/3-012	See figure 1
03	Sleeve, plug	1	M24231/3-010	See figure 1
04	Coupling	1	M24231/3-011	See figure 1
05	Cable, LSTHOF-9	As required	MIL-C-24643/3	See figure 1
06	Compound, polyurethane	As required	Type I, category A, MIL-M-24041	See figure 1
07	Compound, epoxy	As required	Cast epoxy resin compound 4/	See figure 1
08	Insert assembly	1	M24231/29-003	See figure 1

1/ Item numbers are the same as encircled numbers shown on figure 1.
2/ See applicable figure or table listed in remarks column for part numbers and dimensions.
3/ Quantity is for one complete assembly of each size.
4/ Arcoset No. 200, M.M. Reif and Co., Rockledge, PA, or Phillicast No. 2, Philadelphia Resin Corp., Montgomeryville, PA, or equal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Unless otherwise indicated, tolerances shall be as follows:

   (a) Decimals - plus or minus 0.005 inch.
   (b) Fractions - plus or minus 1/64 inch.
   (c) Angular dimensions - plus or minus 1/2 degree.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N279-23)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.