INCH POUND

MIL-C-24231/23F(SH)
20 February 1992
SUPERSEDING
MIL-C-24231/23E(SH)
15 May 1987

MILITARY SPECIFICATION SHEET

CONNECTOR, PLUG, TYPE I, MOLDED, THREE-CONDUCTOR, FOR THOF-9 CABLE

This specification sheet is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all departments and agencies of the Department of Defense.


The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-24231.

(F) denotes change

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

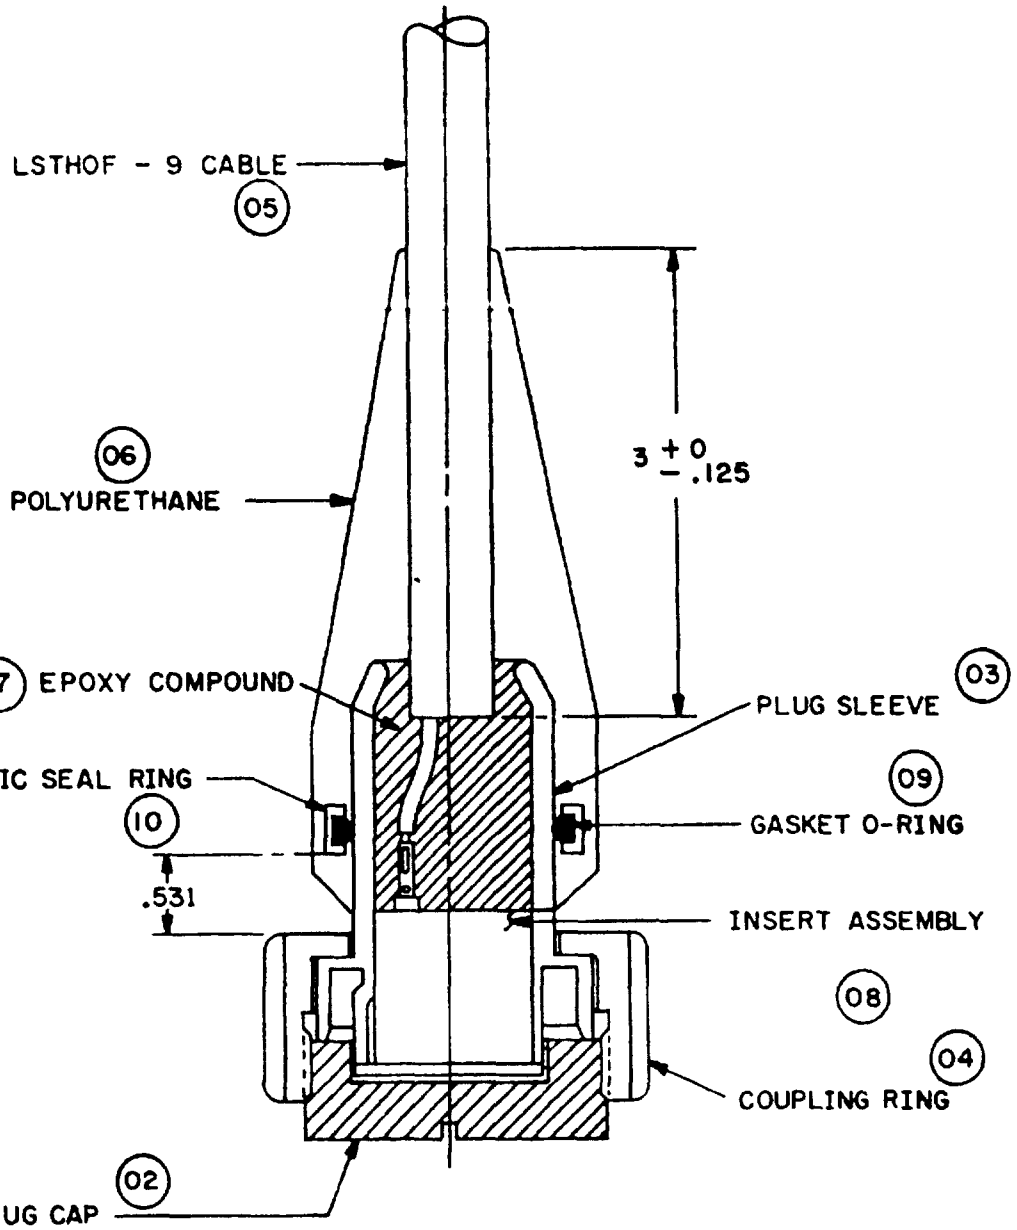

NOTES:

1. All dimensions are in inches
2. Unless otherwise indicated, tolerances shall be as follows.

   a. Decimals - plus or minus 0.005 inch.
   b. Fractions - plus or minus 1/64 inch
   c. Angular dimensions - plus or minus 1/2 degree

Figure 1 Connector, plug, molded (3 conductor, size 12 socket) M24231/23-001, Symbol 713 9 and protective cap

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

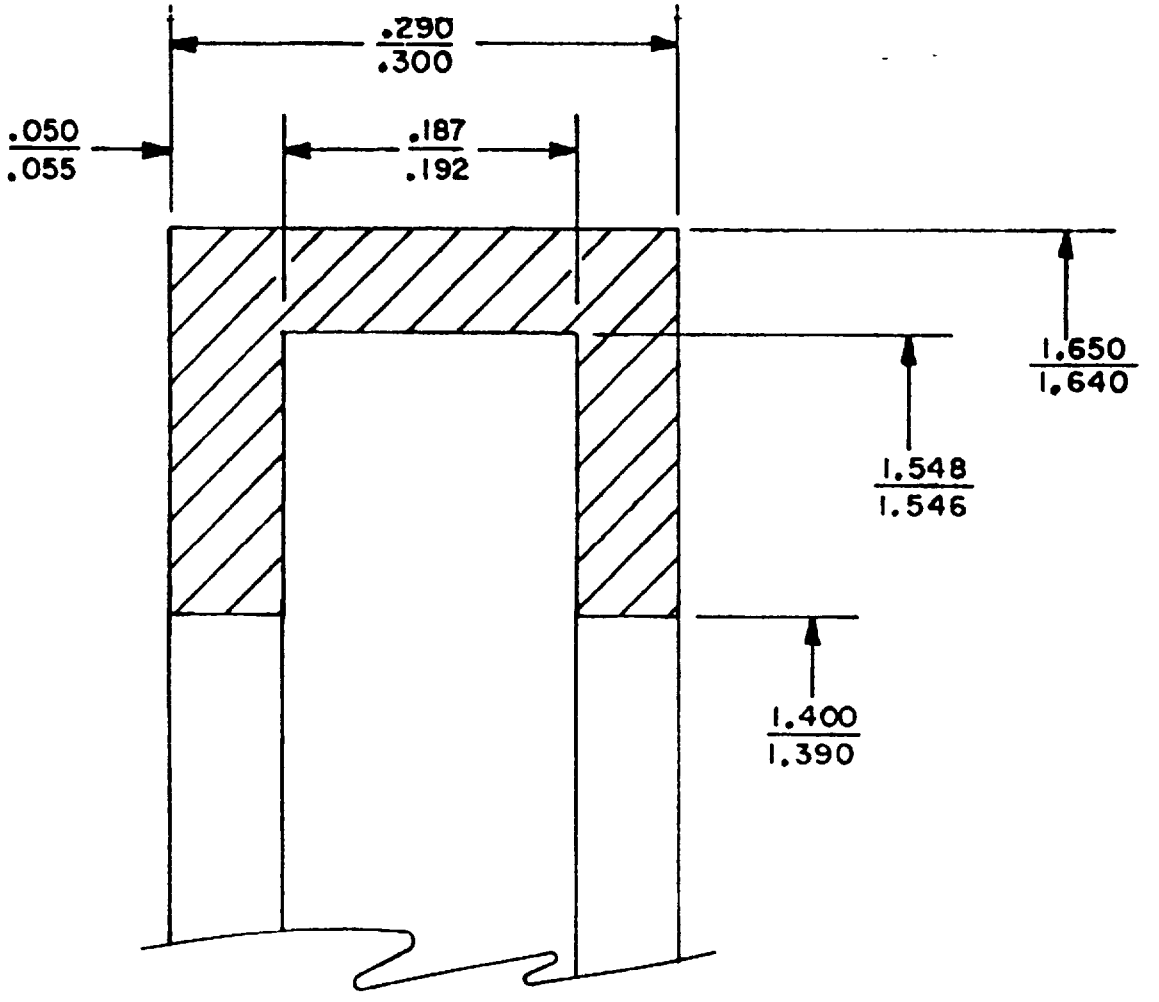


Figure 2 Plug seal ring dimensions (Item 10).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

Table I. Parts list

Item 1/ no	Description 2/	Quantity for M24231/23 3/	Material/specification	Remarks
		001		
01	Plug, molded 3-connector, symbol no. 713 9	1	-----	See figure 1
02	Cap, protective	1	M24231/3-012	See figure 1
03	Sleeve, plug	1	M24231/3-010	See figure 1
04	Coupling	1	M24231/3-011	See figure 1
05	Cable, LSTHOF-9	As required	MIL-C-24643/3	See figure 1
06	Compound, polyurethane	As required	Type I, category A, MIL-M-24041	See figure 1
07	Compound, epoxy	As required	Cast epoxy resin compound 4/	See figure 1
08	Insert assembly	1	M24231/29-003	See figure 1
09	Gasket O-ring	1	MS28775-219	See figure 1
10	Plastic seal ring	1	L-P-393 or ULTEM 1000	See figures 1 and 2

1/ Item numbers are the same as encircled numbers shown on figure 1
2/ See applicable figure or table listed in remarks column for part numbers and dimensions
3/ Quantity is for one complete assembly of each size
4/ Arcoset No. 200, M.M. Reif and Co , Rockledge, PA, or Phillicast No. 2, Philadelphia Resin Corp., Montgomeryville, PA or equal

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

1. Dimensions and configuration. See figures 1 and 2

Preparing activity:
Navy - SH
(Project 5935-N410)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.