
MIL-C-24231/10C(SHIPS)
30 August 1976
SUPERSEDING
MIL-C-24231/10B(SHIPS)
15 January 1970

MILITARY SPECIFICATION SHEET

CONNECTORS, SINGLE CABLE, 14-, 24-, 30-, or 40-CONDUCTOR

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.


The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of MIL-C-24231(SHIPS).

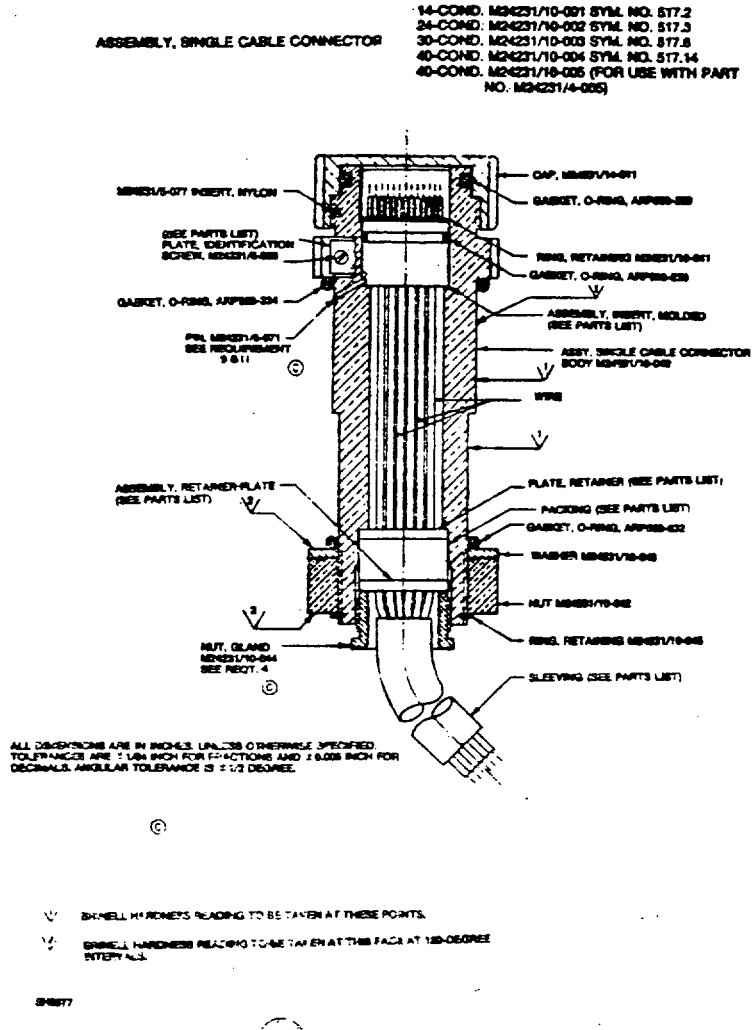

© Denotes changes

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.

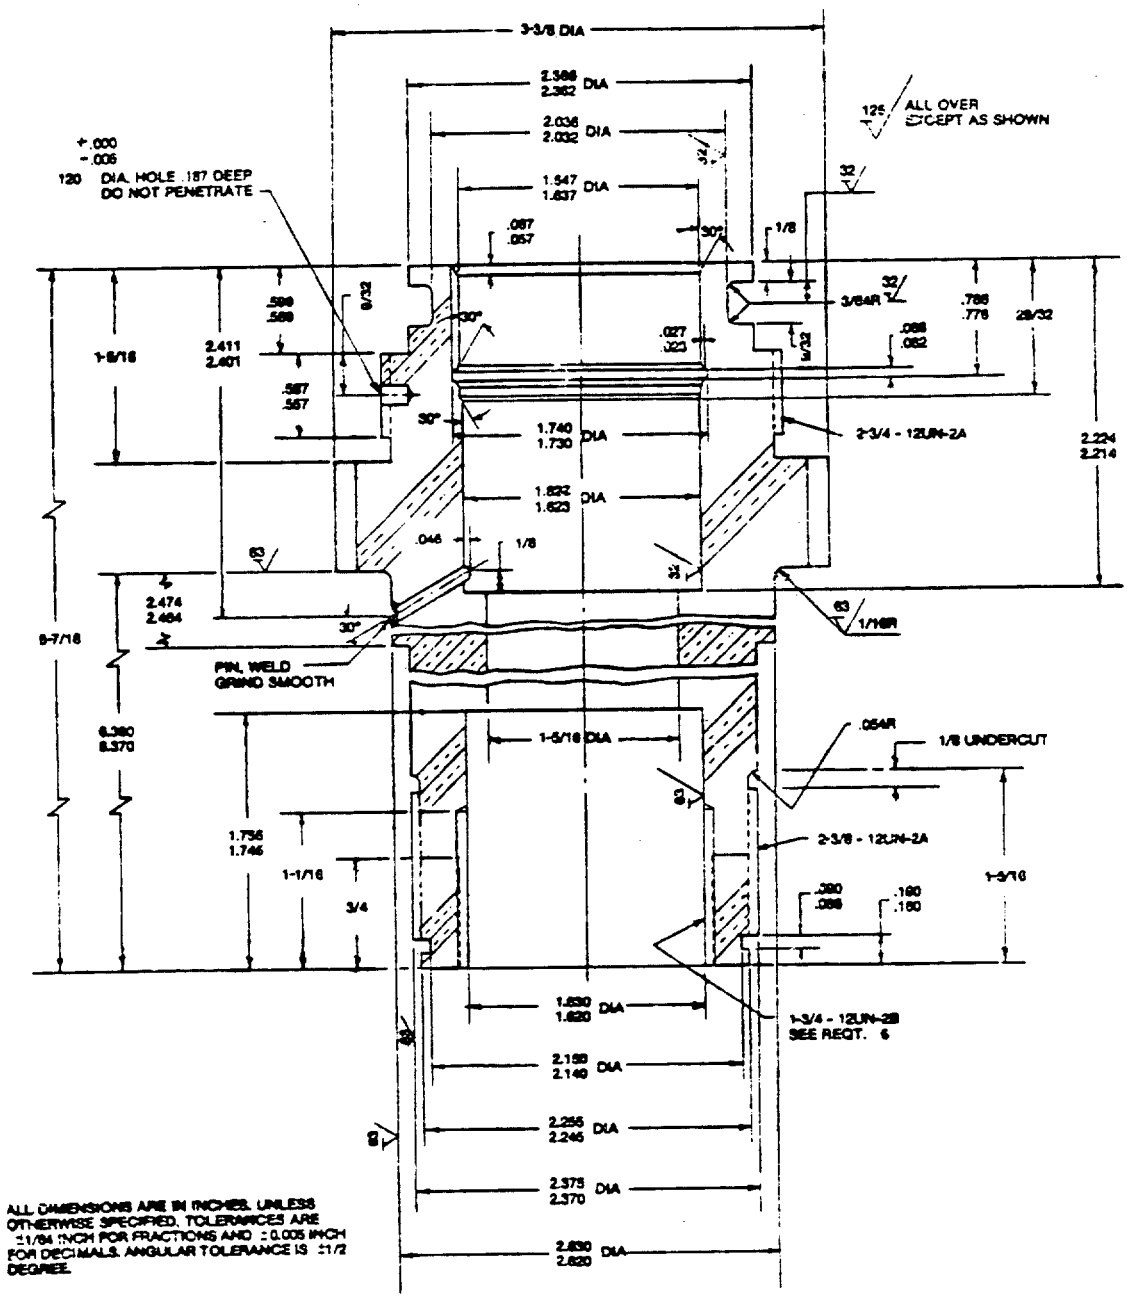

SH8677-1

ASSEMBLY, SINGLE CABLE CONNECTOR BODY
M24231/10-040


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.

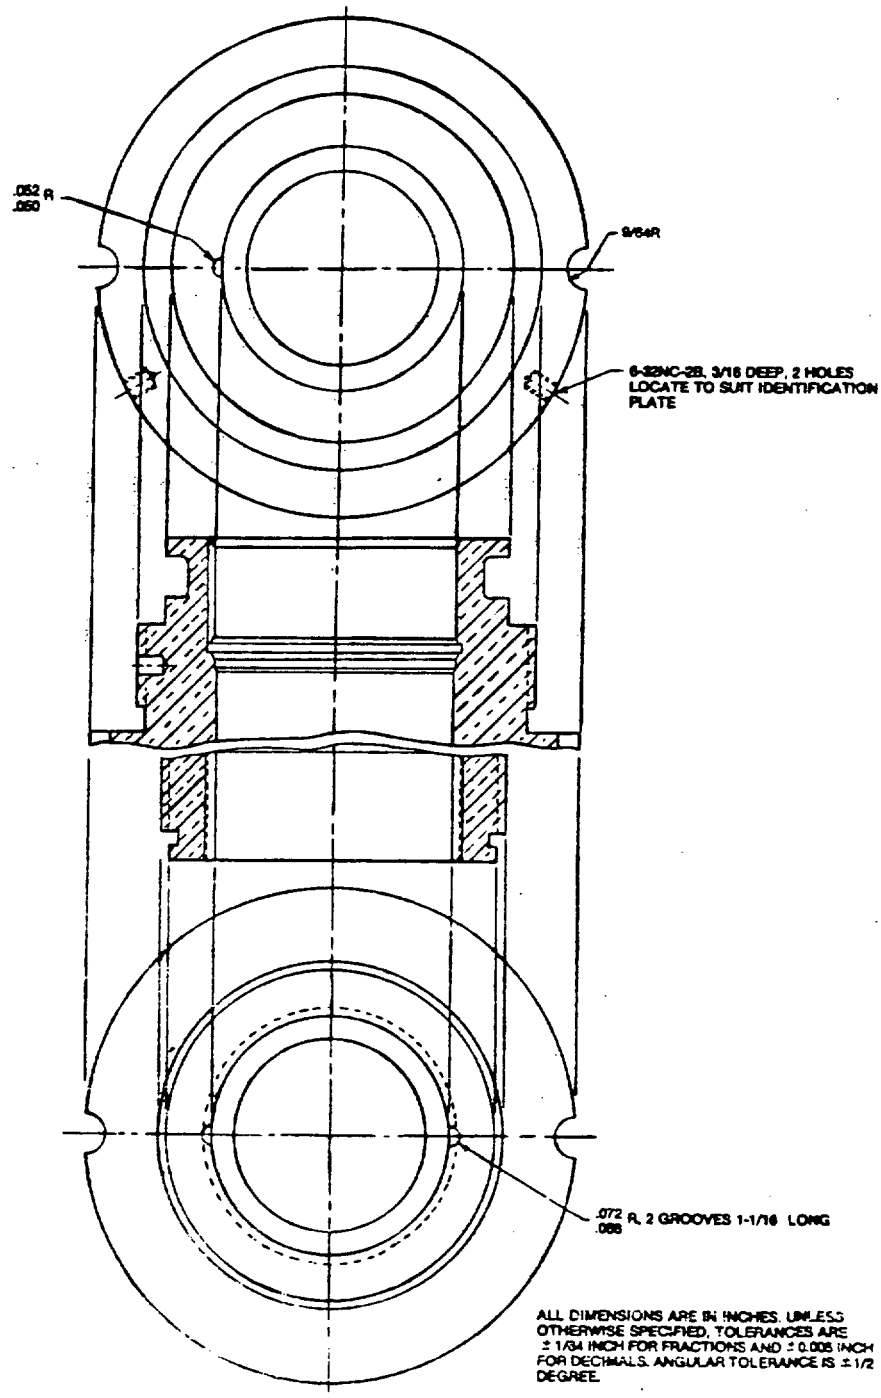


ASSEMBLY SINGLE CABLE CONNECTOR BODY M24231/10-040

DHS6174


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.

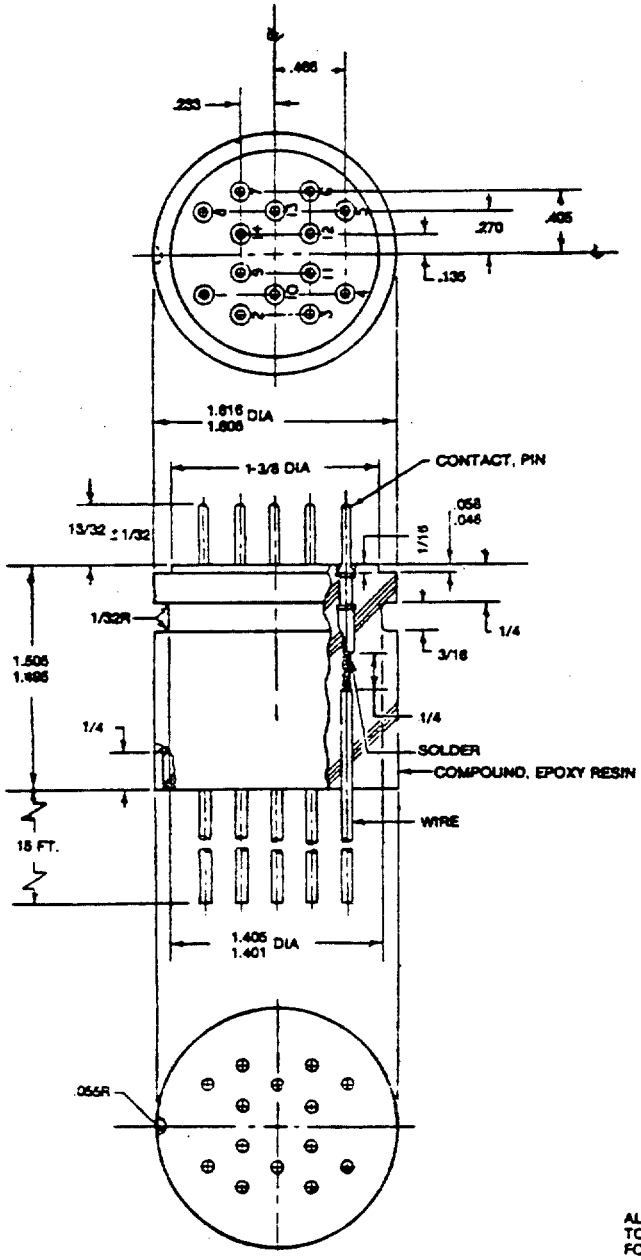


ASSEMBLY, INSERT, MOLDED (14-COND)
M24231/10-010

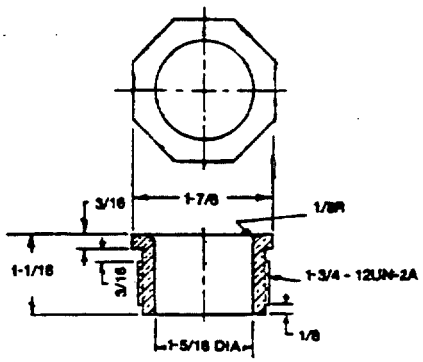

NUT, GLAND
M24231/10-044






PLATE, IDENTIFICATION
M24231/10-091 (14-COND)
M24231/10-092 (24-COND)
M24231/10-093 (30-COND)
M24231/10-094 (40-COND)
M24231/10-095 (40-COND)

ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± 1/64 INCH FOR FRACTIONS AND ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE IS ± 1/2 DEGREE.

SH9877-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.

SAME AS M24231/10-010
EXCEPT AS SHOWN

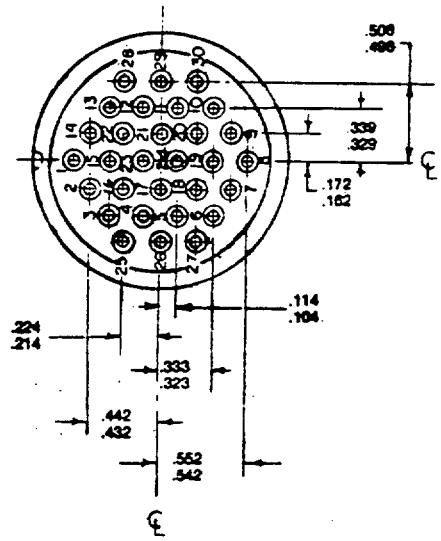


ASSEMBLY, INSERT, MOLDED (30-COND)
M24231/10-030

SAME AS M24231/10-010
EXCEPT AS SHOWN

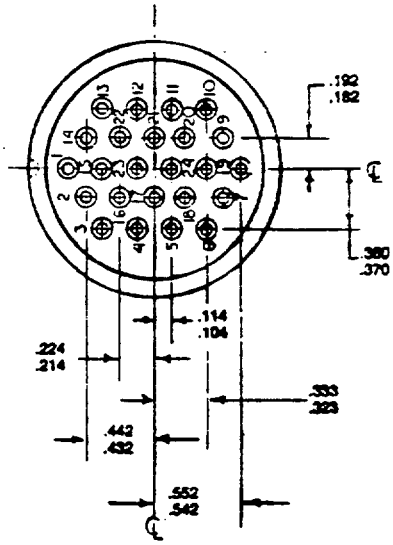

ASSEMBLY, INSERT, MOLDED (24-COND)
M24231/10-020


SAME AS M24231/10-010
EXCEPT AS SHOWN

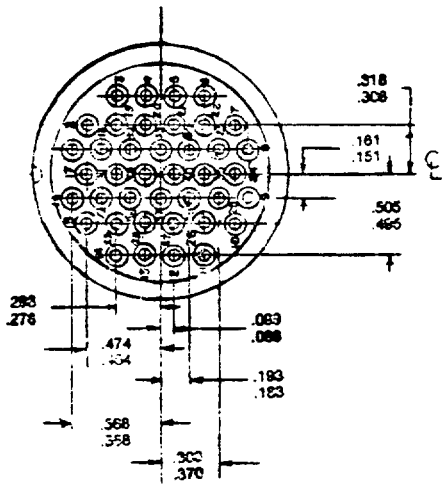


ASSEMBLY, INSERT MOLDED (40-COND)
M24231/10-035

ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± 1/64 INCH FOR FRACTIONS AND ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE IS ± 1/2 DEGREE.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.

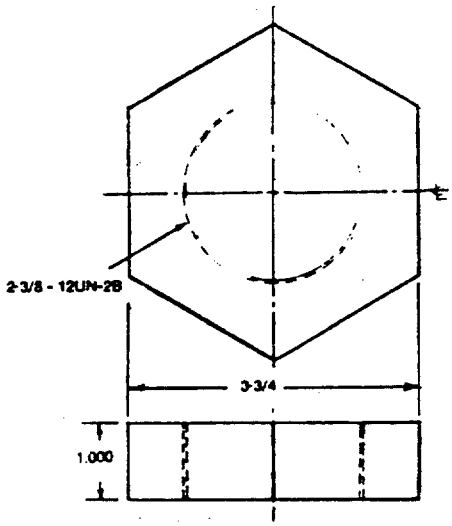

NUT
M24231/10-042

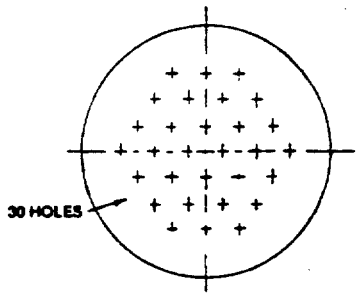


PLATE, RETAINER
SAME AS M24231/10-080 EXCEPT NO POSITIONING PINS REQUIRED.
M24231/10-081

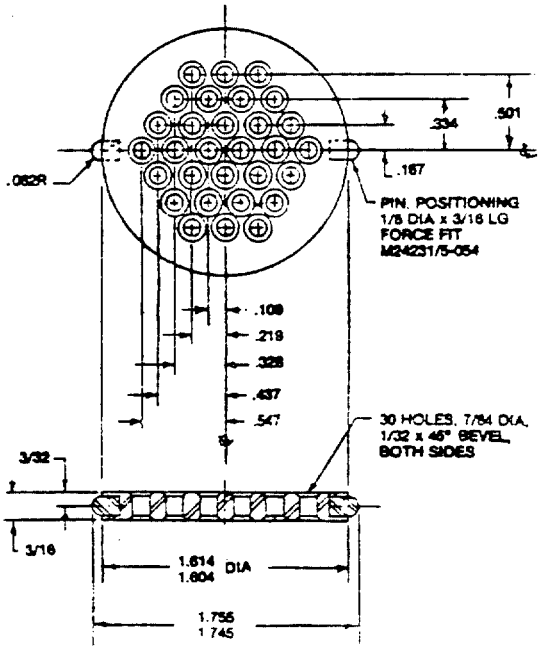

ASSEMBLY, PLATE, RETAINER
M24231/10-080

SH9577-8

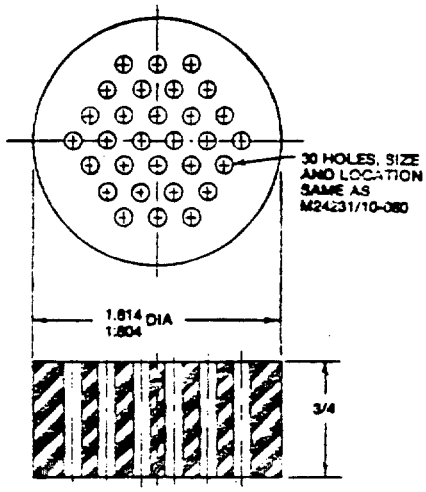


PACKING
M24231/10-082


ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±1/64 INCH FOR FRACTIONS AND ±0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE IS ±1/2 DEGREE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.


ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±1/64 INCH FOR FRACTIONS AND ±0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE IS ±1/2 DEGREE.

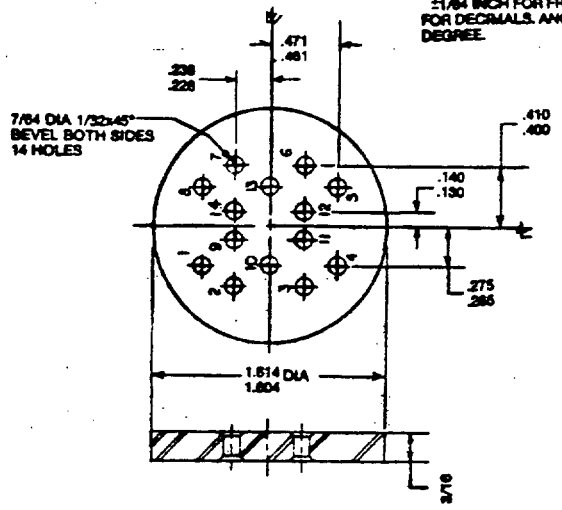


PLATE, RETAINER M24231/10-061

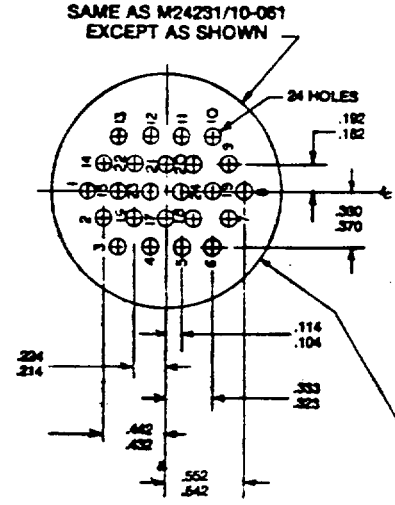


PLATE, RETAINER M24231/10-071

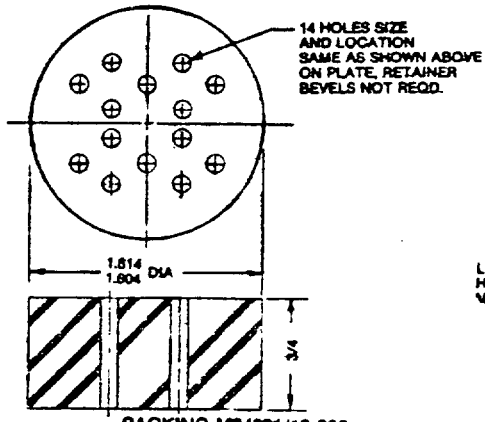


PACKING M24231/10-062

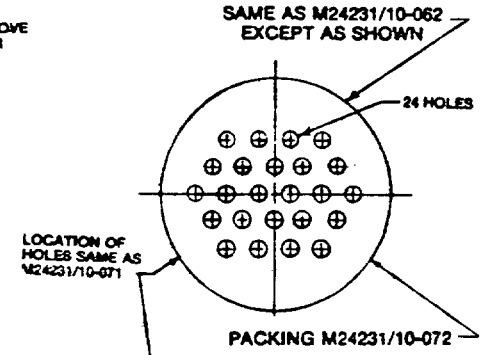

PACKING M24231/10-072

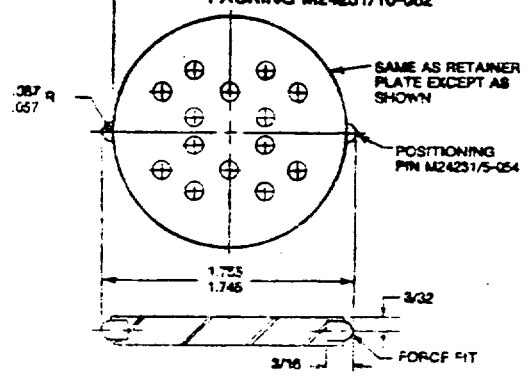


ASSEMBLY, RETAINER PLATE M24231/10-060

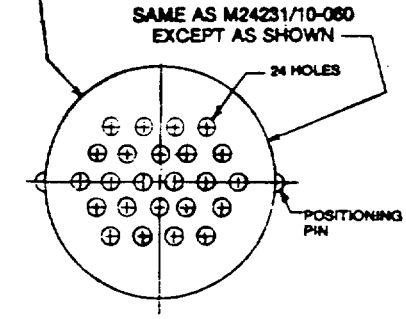


ASSEMBLY, RETAINER PLATE
M24231/10-070

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.


ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±1/64 INCH FOR FRACTIONS AND ±0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE IS ±1/2 DEGREE.



PLATE, RETAINER
SAME AS M24231/10-077 EXCEPT NO POSITIONING PINS REQUIRED.
M24231/10-078

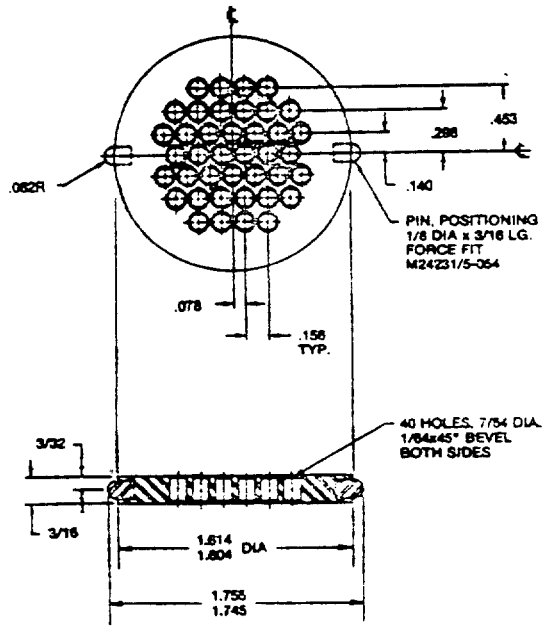


ASSEMBLY PLATE RETAINER
M24231/10-077

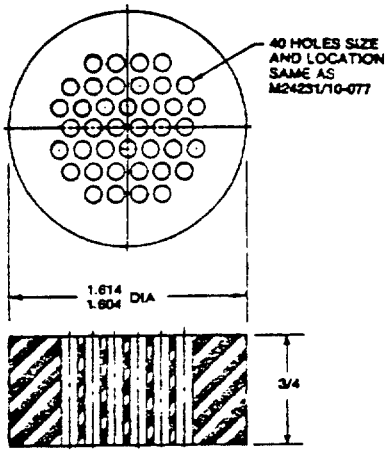


PACKING
M24231/10-079

SH9577-10


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.

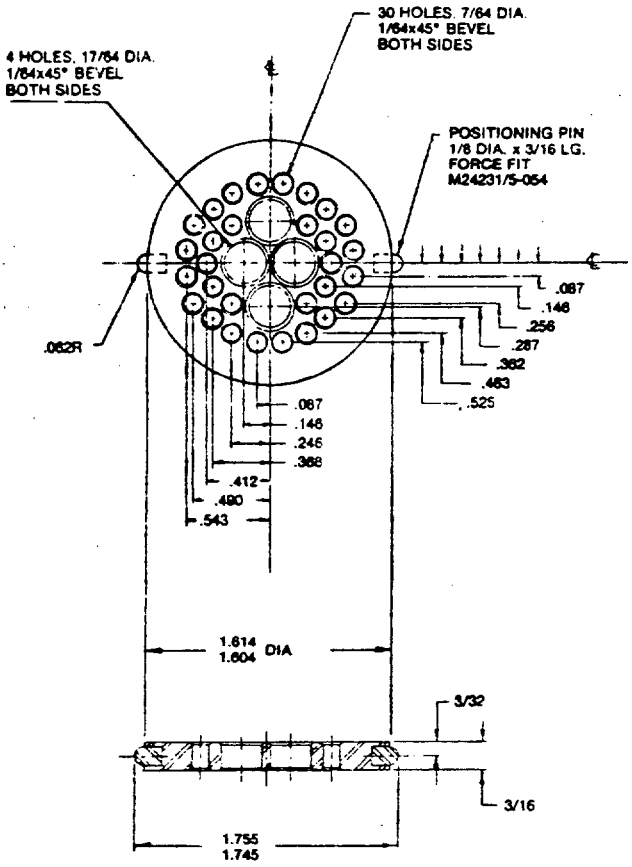

ASSEMBLY, PLATE, RETAINER
M24231/10-074



PLATE, RETAINER
SAME AS M24231/10-074
EXCEPT NO POSITIONING PINS
REQUIRED
M24231/10-075

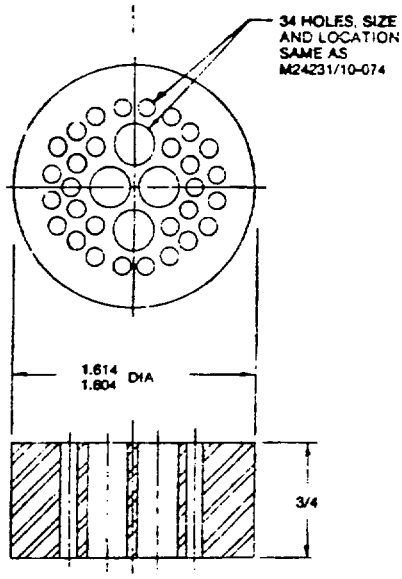


PACKING
M24231/10-076

ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±1/64 INCH. CONVERSIONS AND ±0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE ±1/2 DEGREE.

SH9677-11

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.

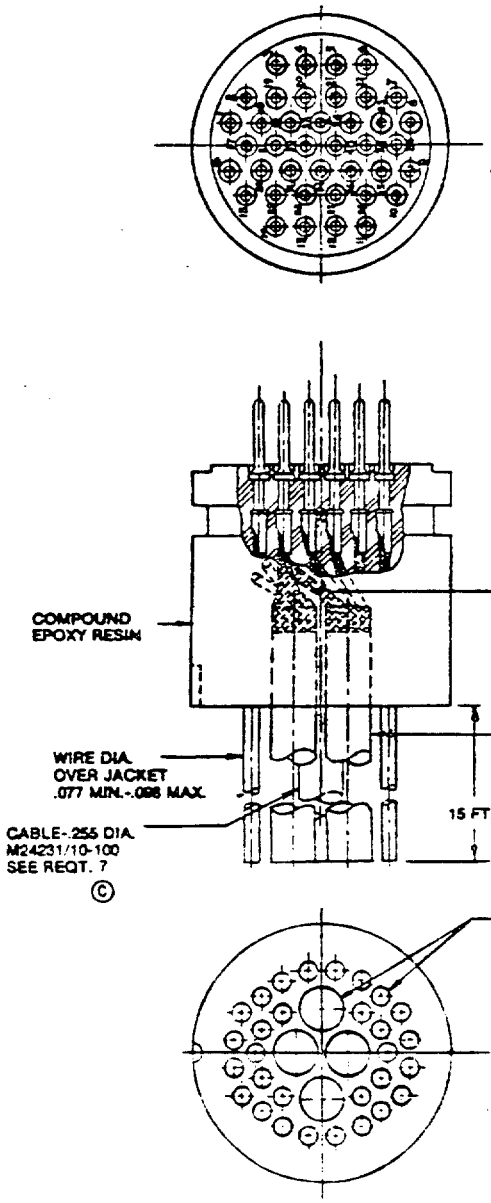

CONNECTIONS FOR SHIELDED PAIR-2SWU-1

SHIELDED PAIR NO.	COLOR	PIN NO.
15 XFMR SW.	WHITE BLACK SHIELD	30 29 31
16 MONITOR SPKR.	WHITE BLACK SHIELD	33 32 31
18 XU	WHITE BLACK SHIELD	37 36 36
19 JA	WHITE BLACK SHIELD	40 36 36
√ WIRE B-16	BLACK	ALL OTHER PINS

√ MIL-W-16878/1

ASSEMBLY, INSERT, MOLDED (40-COND)
M24231/10-036
SAME AS M24231/10-035
EXCEPT AS SHOWN

SH9677-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.

TABLE I - Parts list.

Part No.	Name	Quantity for				
		M24231/10 -001	M24231/10 -002	M24231/10 -003	M24231/10 -004	M24231/10 -005
M24231/10-001	Assembly, Single cable connector (14-conductor)	1				
M24231/10-002	Assembly, Single cable connector (24-conductor)		1			
M24231/10-003	Assembly, Single cable connector (30-conductor)			1		
M24231/10-004	Assembly, Single cable connector (40-conductor)				1	
M24231/10-005	Assembly, Single cable connector (40-conductor)					1
M24231/10-010	Assembly, insert, molded (14-conductor)	1				
M24231/10-011	Sleeving, 0.680 I.D.X 0.040 thk.	15 Ft.				
M24231/10-020	Assembly, insert, molded (24-conductor)		1			
M24231/10-021	Sleeving 0.890 I.D.X. 0.050 thk.		15 Ft.	15 Ft.	15 Ft.	15 Ft.
M24231/10-030	Assembly, Insert, Molded (30-conductor)			1		
M24231/10-035	Assembly, insert, molded (40-conductor)				1	
M24231/10-036	Assembly, insert, molded (40-conductor)					1
M24231/10-040	Assembly, Single cable conn. body	1	1	1	1	1
M24231/10-041	Ring, retaining	1	1	1	1	1
M24231/10-042	Nut	1	1	1	1	1
M24231/10-043	Washer (see reqt. 6)	1	1	1	1	1
M24231/10-044	Nut, gland	1	1	1	1	1
M24231/10-045	Ring, retaining	1	1	1	1	1
M24231/10-060	Assembly, retainer plate	1				
M24231/10-061	Plate, retainer	1				
M24231/10-062	Packing	1				
M24231/10-070	Assembly, retainer plate		1			
M24231/10-071	Plate, retainer		1			
M24231/10-072	Packing		1			
M24231/10-074	Assembly, retainer plate					1
M24231/10-075	Plate, retainer					1
M24231/10-076	Packing					1
M24231/10-077	Assembly, retainer plate				1	
M24231/10-078	Plate retainer				1	
M24231/10-079	Packing				1	
M24231/10-080	Assembly, retainer plate			1		
M24231/10-081	Plate, retainer			1		
M24231/10-082	Packing			1		
M24231/10-091	Plate, identification	1				
M24231/10-092	Plate, identification		1			
M24231/10-093	Plate, identification			1		
M24231/10-094	Plate, identification				1	
M24231/10-095	Plate, identification					1
M24231/10-100	Cable Type PSWU-1 (15 ft. long)					4
ARP 568-220	O-ring gasket	1	1	1	1	1
ARP 568-329	O-ring gasket	1	1	1	1	1
ARP 568-332	O-ring gasket	1	1	1	1	1
ARP 568-334	O-ring gasket	1	1	1	1	1
M24231/5-054	Pin, positioning	2	2	2	2	2
M24231/5-071	Pin	1	1	1	1	1
M24231/5-077	Insert, nylon	1	1	1	1	1
M24231/5-083	Screw	2	2	2	2	2
M24231/14-011	Cap	1	1	1	1	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figures.
2. Retaining ring, part number M24231/10-041, shall be Spirolox RR-165-S, or equal.
3. Retaining ring, part number M24231/10-045, shall be Truarc 5100-225-W, or equal.
4. The gland nut shall be tightened until packing tightens against the wires and cables. This can be determined by moving wires or cables gently back and forth until wire or cable is seized by packing. The gland shall be turned approximately one-fourth of a turn more to hold the wires and cables in place. DO NOT OVERTIGHTEN the gland nut or attempt to tighten down metal to metal, as this can damage the wires and cables.
5. Dimensions for washer, part number M24231/10-043, shall be 4-3/8 O.D. by 2.385 I.D. by 0.162 thick.
6. Full or partial threads shall not extend more than 0.083 inch beyond the 3/4-inch thread length.
7. (C) Cable shall be Type 2SWU-1 in accordance with MIL-C-915/49.
8. Parts information: See table 1.
9. (C) Refer to requirement 9 of MIL-C-24231/5 for alternate method of manufacturing connector body and installing guide pin M24231/5-071.
10. (C) The retainer plates and retainer plate assemblies shall be manufactured from nickel-copper alloy in accordance with class A, form 1, hot finished in accordance with QQ-N-281 with a minimum yield strength of 40,000 lbf/in^2 at 0.2 percent offset, or nickel-copper alloy in accordance with class A, form 1, cold drawn, in accordance with QQ-N-281 with a minimum yield strength of 50,000 lbf/in^2 at 0.2 percent offset.
11. (C) See requirement 12 of MIL-C-24231/5.

Preparing activity:
Navy - SH
Project 5935-NRAA-2A1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SHIP ENGINEERING CENTER
CENTER BUILDING - SEC 6124
PRINCE GEORGES CENTER
HYATTSVILLE, MARYLAND 20782

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.