
MILITARY SPECIFICATION SHEET

CONNECTOR, RECEPTACLE, MULTI-PIN, THREE-, FOUR-, AND FIVE- CONDUCTOR

© This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the receptacle described herein shall consist of this document and the latest issue of MIL-C-24231(SHIPS).

RECEPTACLE, ASSEMBLY © —
- M24231/12-001 3-CONDUCTOR-SYM. NO. 737
- M24231/12-002 2-CONDUCTOR SHIELDED-SYM. NO. 737.4
- M24231/12-003 4-CONDUCTOR-SYM. NO. 737.7
- M24231/12-004 5-CONDUCTOR

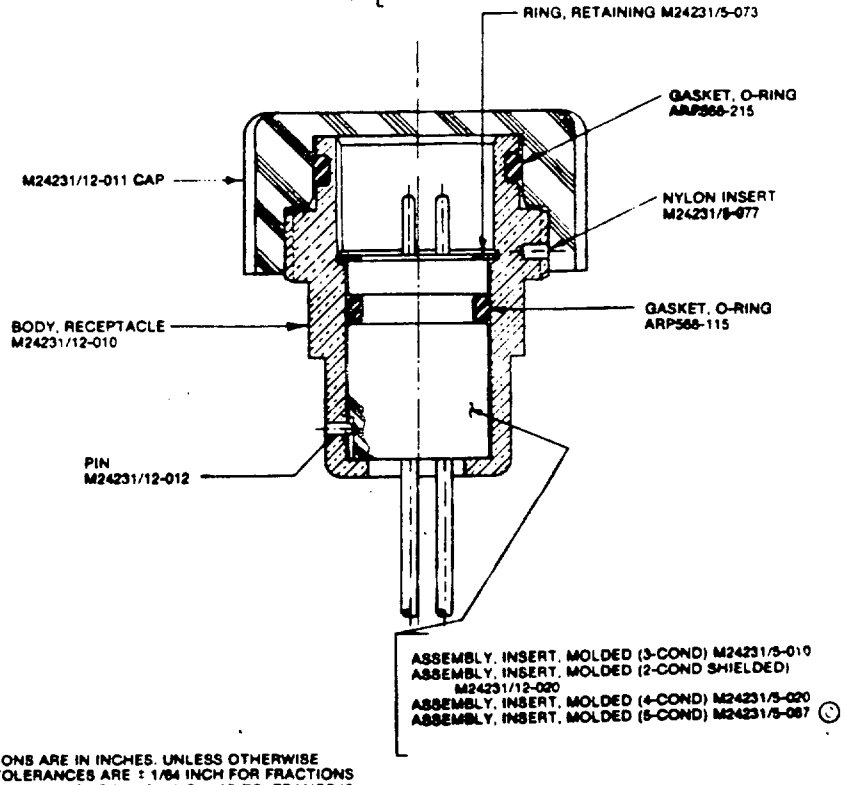



ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± 1/64 INCH FOR FRACTIONS AND ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE IS ± 1/2 DEGREE

BH9679

© Denotes changes FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.

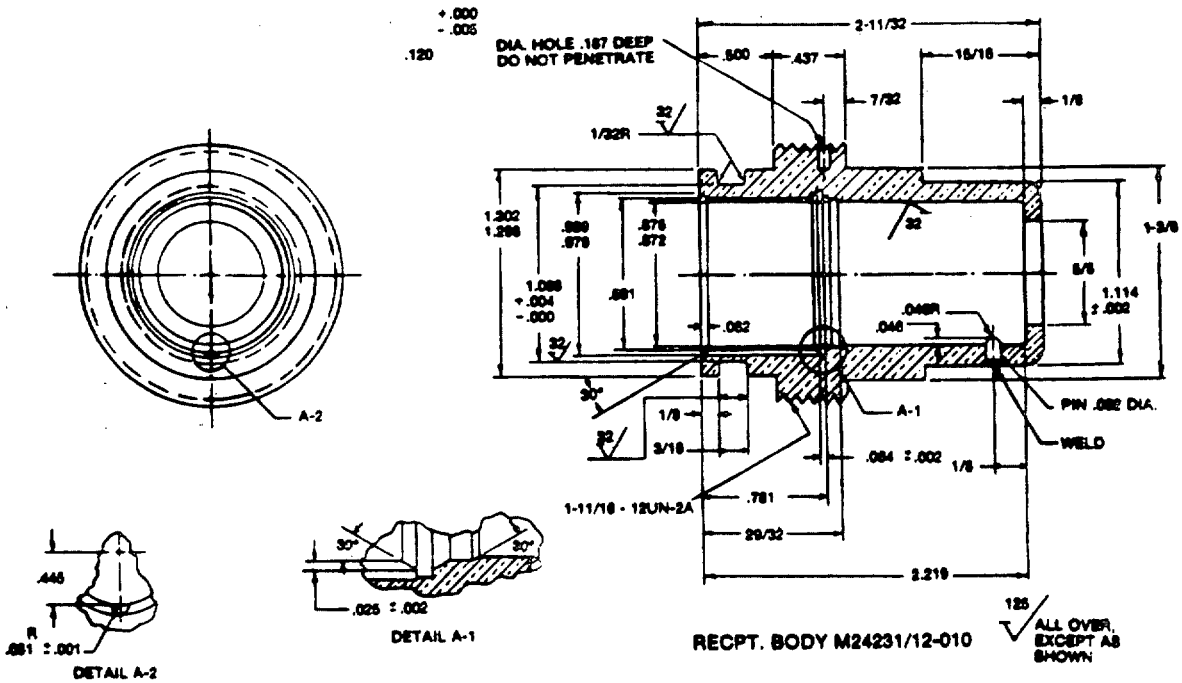

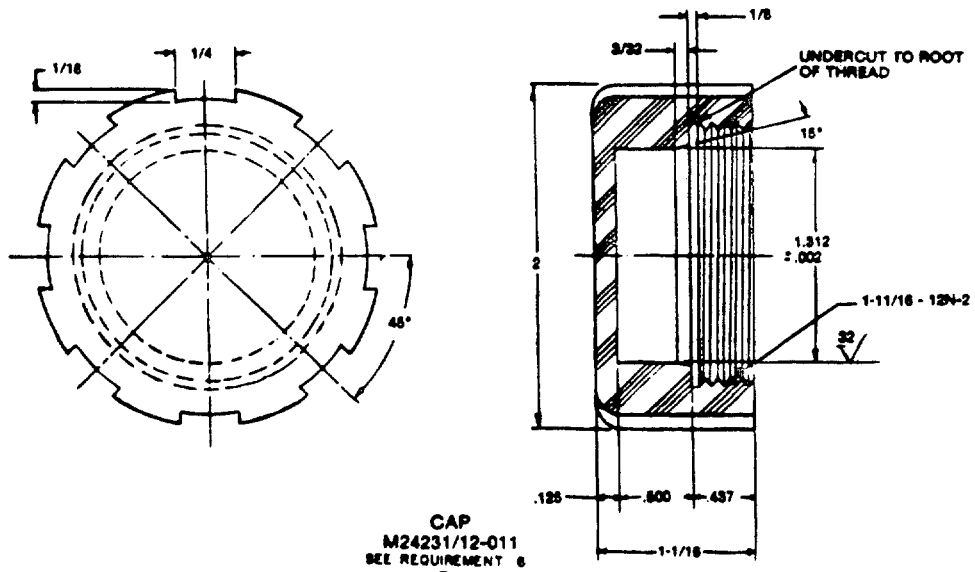

CAP
M24231/12-011
SEE REQUIREMENT 6


©

ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± 1/64 INCH FOR FRACTIONS AND ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE IS ± 1/2 DEGREE


BHB879-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.

SAME AS M24231/5-010
EXCEPT AS SHOWN



ASSEMBLY, INSERT, MOLDED
M24231/12-020

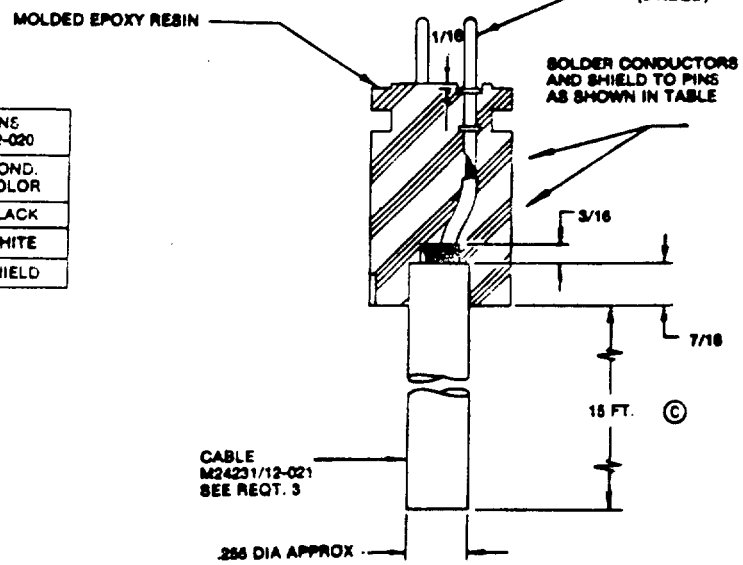

CONNECTIONS FOR M24231/12-020	
PIN NO.	COND. COLOR
1	BLACK
2	WHITE
3	SHIELD

ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±1/64 INCH FOR FRACTIONS AND ± 0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE IS ±1/2 DEGREE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.

TABLE I - Parts list.

Part No.	Part Name	Quantity for			
		M24231/12-001	M24231/12-002	M24231/12-003	M24231/12 004
M24231/12-001	Assembly, Receptacle (3-Conductors)	1			
M24231/12-002	Assembly, Receptacle (2-Conductors) Shield		1		
M24231/12-003	Assembly, Receptacle (4-Conductors)			1	
(C) M24231/12-004	Assembly, Receptacle (5-Conductors)				1
M24231/12-010	Receptacle Body	1	1	1	1
M24231/12-011	Cap	1	1	1	1
M24231/12-012	Pin, 0.092 D	1	1	1	1
M24231/12-020	Assembly, Insert, Molded (2-Conductors) Shield		1		
M24231/12-021	Cable		15 feet		
ARP568-115	Gasket, O-Ring	1	1	1	1
ARP568-215	Gasket, O-Ring	1	1	1	1
M24231/5-010	Assembly, Insert, Molded (3-Conductors)	1			
M24231/5-020	Assembly, Insert, Molded (4-Conductors)			1	
(C) M24231/5-067	Assembly, Insert, Molded (5-Conductors)				1
M24231/5-073	Ring, Retaining	1	1	1	1
M24231/5-077	Insert, Nylon	1	1	1	1

REQUIREMENTS:

1. Dimensions and configuration: See figures.
(C) 2. Material for receptacle body shall be manufactured from nickel-copper alloy, class A, form 1, hot finished in accordance with QQ-N-281 with a minimum yield strength of 40,000 lbf/in^2 at 0.2 percent offset, or nickel-copper alloy in accordance with class A, form 1, cold drawn, in accordance with QQ-N-281 with a minimum yield strength of 50,000 lbf/in^2 at 0.2 percent offset.
(C) 3. Cable shall be type 2SWU-1 in accordance with MIL-C-915/49.
4. For parts information, see table.
(C) 5. Material for pin M24231/12-012 shall be monel, class A of QQ-N-281.
6. Material for cap shall be nickel-aluminum-bronze in accordance with MIL-B-24059.

Preparing activity:
Navy - SH
(Project 5935-N842-12)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2020-10-19T20:14Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SHIP ENGINEERING CENTER
CENTER BUILDING - SEC 6124
PRINCE GEORGES CENTER
HYATTSVILLE, MARYLAND 20782

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.