MIL-C-24231/12D(SH)
15 May 1987
SUPERSEDING
MIL-C-24231/12C(SHIPS)
30 August 1976
(See note 3)

MILITARY SPECIFICATION SHEET

# CONNECTOR, RECEPTACLE, MULTI-PIN, TYPE V, THREE-, FOUR-, AND FIVE-CONDUCTOR

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the receptacle described herein shall consist of this specification and the latest issue of MIL-C-24231.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.

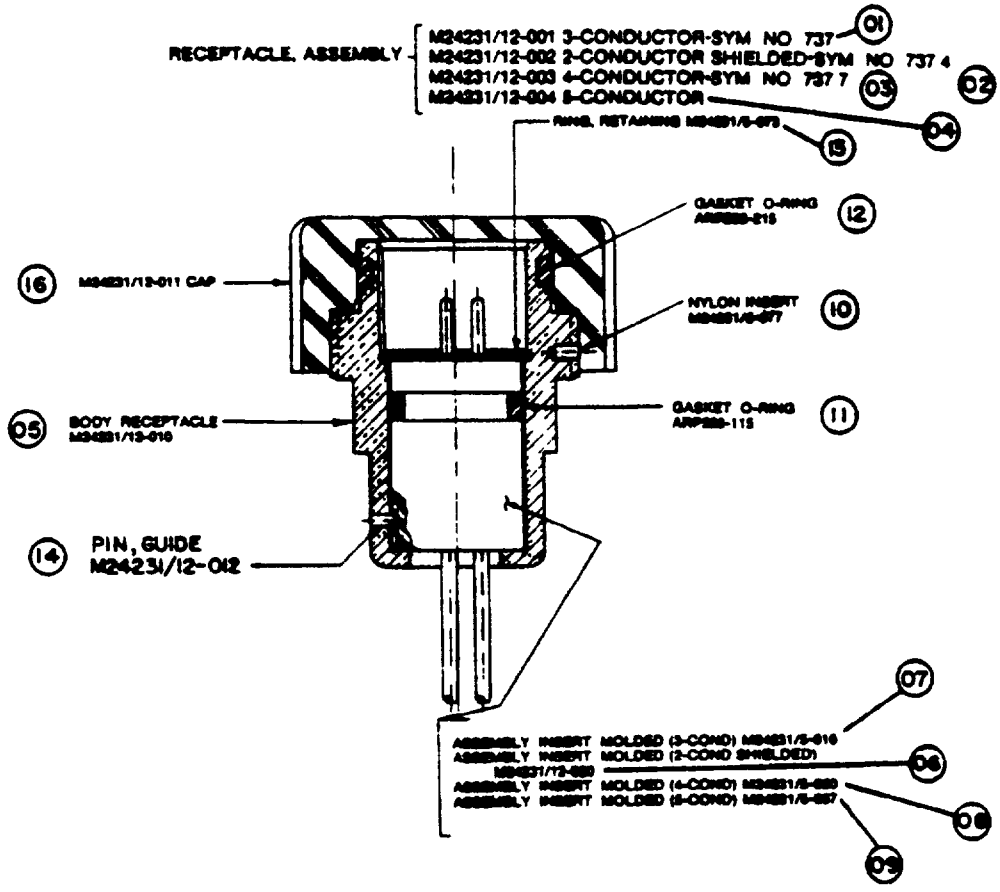


SH 9679

FIGURE 1. Connector, multi-pin receptacle - typical.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.

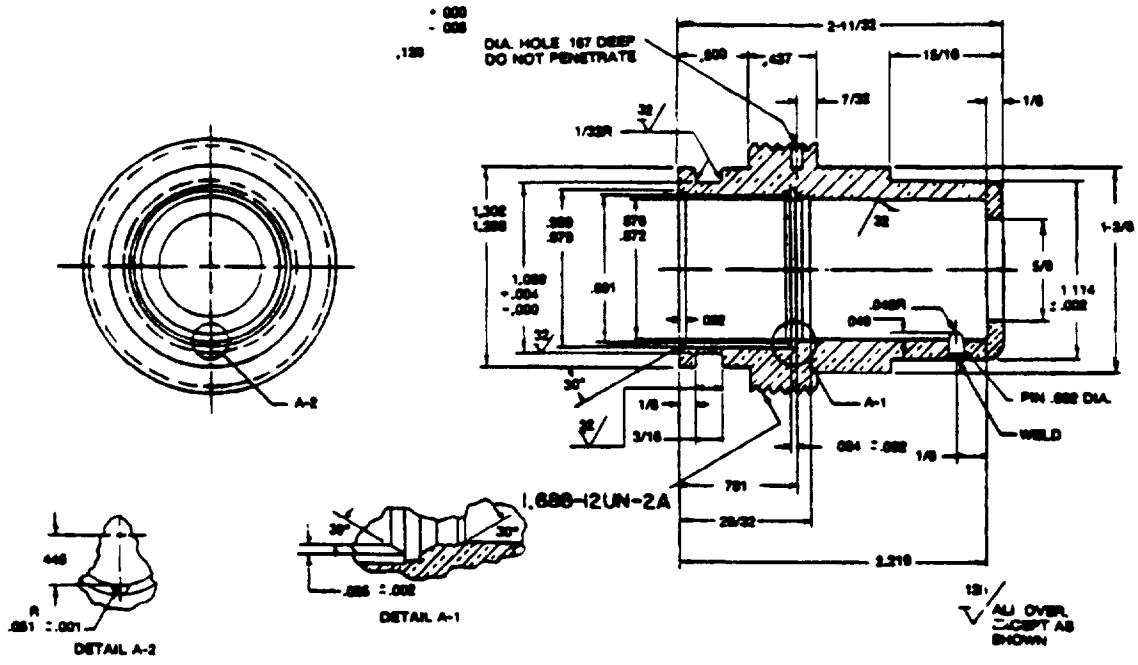



FIGURE 2. Receptacle, body - M24231/12-010. (05)


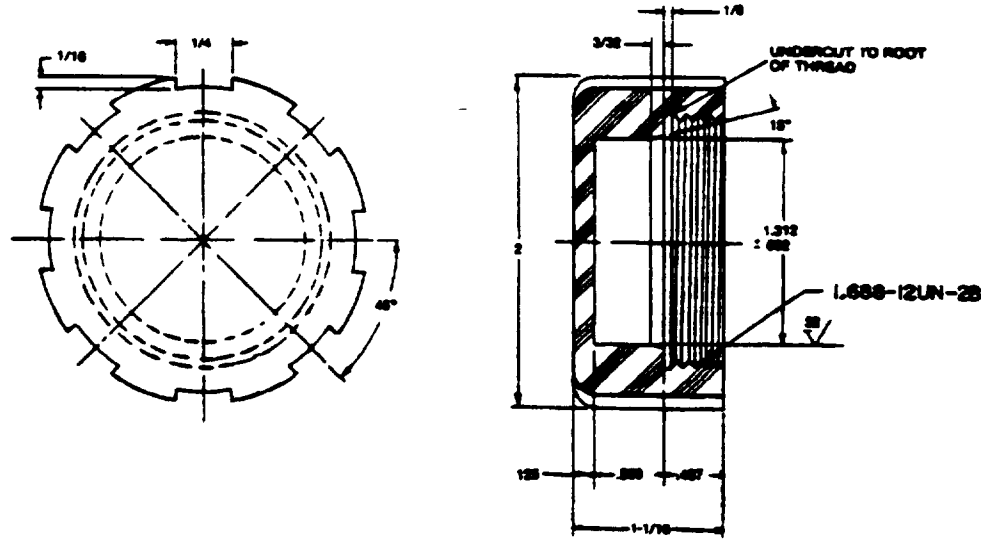



FIGURE 3. Cap - M24231/12-011. (16)

SH 9679-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.

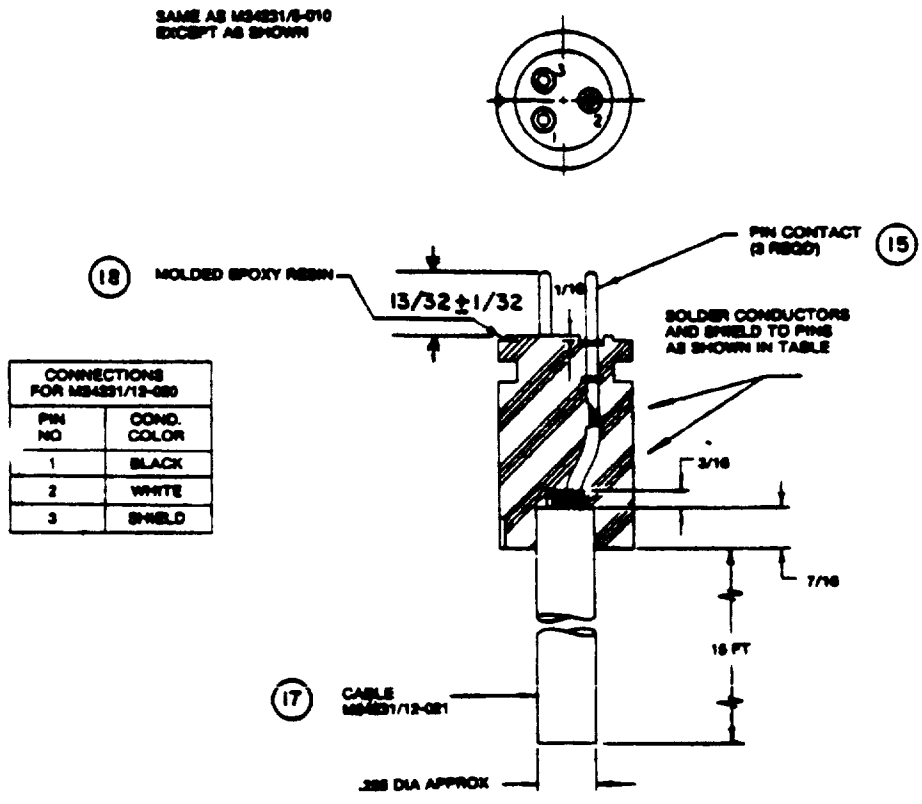


SH 9679-2

FIGURE 4. Assembly, insert, molded - M24231/12-020. (06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.

**REQUIREMENT:**

1. Dimensions and configuration: See figures.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

| Item 1/ no. | Description 2/ | Quantity for M24231/12- 3/ | | | | Material/specific ion | Remarks |
|---|---|---|---|---|---|---|---|
| | | 001 | 002 | 003 | 004 | | |
| 01 | Receptacle assembly, 3-conductor, symbol no. 737 | 1 | | | | ----- | See figure 1 |
| 02 | Receptacle assembly, 2-conductor, symbol no. 737.4 | | 1 | | | ----- | See figure 1 |
| 03 | Receptacle assembly, 4-conductor, symbol no. 737.7 | | | 1 | | ----- | See figure 1 |
| 04 | Receptacle assembly, 5-conductor | | | | 1 | ----- | See figure 1 |
| 05 | Body, receptacle | 1 | 1 | 1 | 1 | Ni-Cu, class A, QQ-N-281 | See figure 2 |
| 06 | Insert assembly, molded 2-conductor | 1 | | | | See items 15, 17, and 18 | See figure 4 |
| 07 | Insert assembly, molded 3-conductor | | 1 | | | M24231/5-010 | See figure 1 |
| 08 | Insert assembly, molded 4-conductor | | | 1 | | M24231/5-020 | See figure 1 |
| 09 | Insert assembly, molded 5-conductor | | | | 1 | M24231/5-067 | See figure 1 |
| 10 | Insert | 1 | 1 | 1 | 1 | M24231/5-077 | See figure 1 |
| 11 | Gasket, O-ring | 1 | 1 | 1 | 1 | MS28775-115 | See figure 1 |
| 12 | Gasket, O-ring | 1 | 1 | 1 | 1 | MS28775-215 | See figure 1 |

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2020-10-19T20:14Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list. - Continued

| Item 1/ no. | Description 2/ | Quantity for M24231/12- 3/ | | | | Material/specification | Remarks |
|---|---|---|---|---|---|---|---|
| | | 001 | 002 | 003 | 004 | | |
| 13 | Ring, retaining | 1 | 1 | 1 | 1 | M24231/5-073 | See figure 1 |
| 14 | Pin, guide, 0.092 diameter length as required | 1 | 1 | 1 | 1 | Ni-Cu, class A, QQ-N-281 | See figure 1 |
| 15 | Pin, contact | 3 | 3 | 4 | 5 | MIL-C-24231 | See figures 1 and 4 |
| 16 | Cap, pressure-proof | 1 | 1 | 1 | 1 | Ni-Al-BRZ, QQ-C-465 4/ | See figure 3 |
| 17 | Cable, 2SWU-1, 15 ft | | 1 | | | MIL-C-24643/33 | See figure 4 |
| 18 | Epoxy resin, molded | As required | | | | Cast epoxy resin compound 5/ | See figure 4 |

1/ Item numbers are the same as encircled numbers shown on figures.
2/ See applicable figure or table listed in remarks column for part numbers and dimensions.
3/ Quantity is for one complete assembly of each size.
4/ May be high impact plastic, PVC, commercial when pressure-proof cap is not specified (see 3.4.4.1).
5/ Arcoset No. 200, M.M. Reif and Co., Rockledge, PA, or Phillicast No. 2, Philadelphia Resin Corp., Montgomeryville, PA, or equal.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Unless otherwise indicated, tolerances shall be as follows:

   (a) Decimals - plus or minus 0.005 inch.
   (b) Fractions - plus or minus 1/64 inch.
   (c) Angular dimensions - plus or minus 1/2 degree.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N279-12)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.