
MILITARY SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, MULTI-PIN, TYPE V, SEVEN- AND NINE-CONDUCTOR

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the receptacle described herein shall consist of this specification and the latest issue of MIL-C-24231.

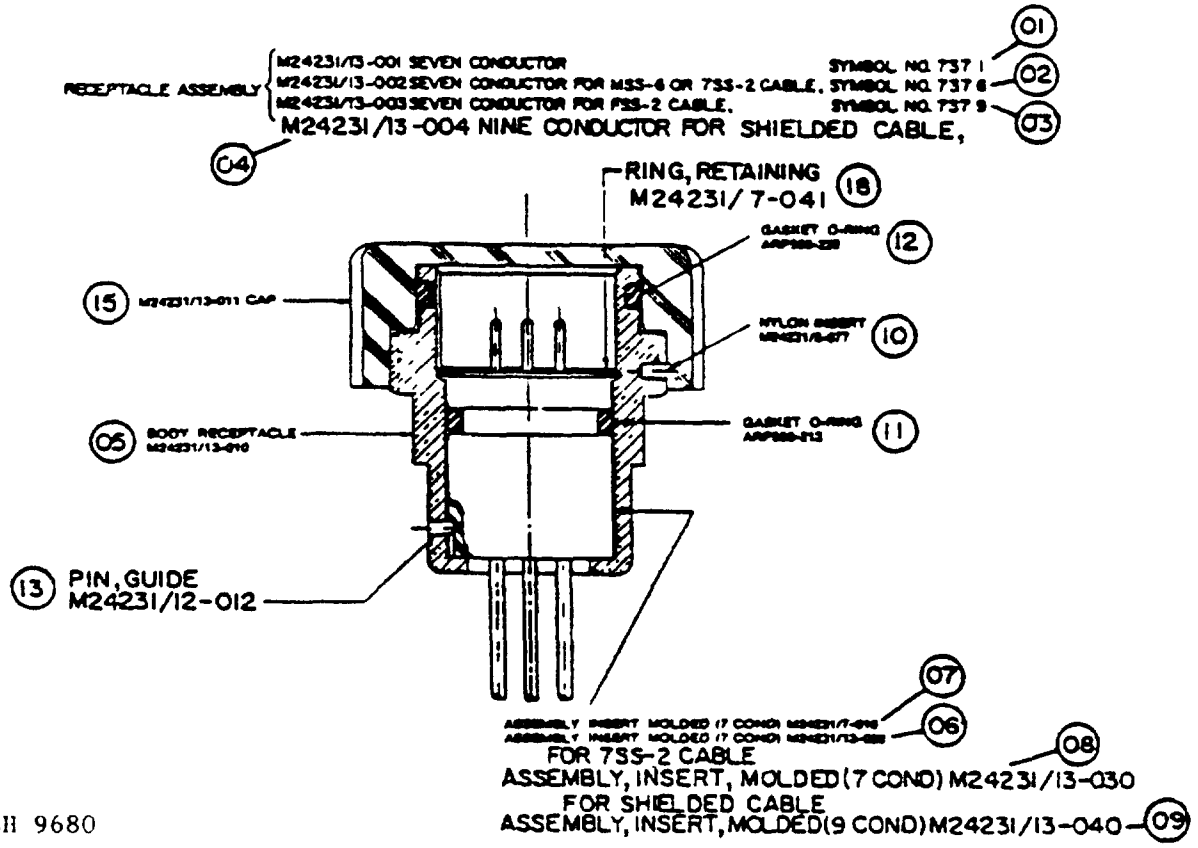

SH 9680

FIGURE 1. Connector, multi-pin receptacle - typical.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.


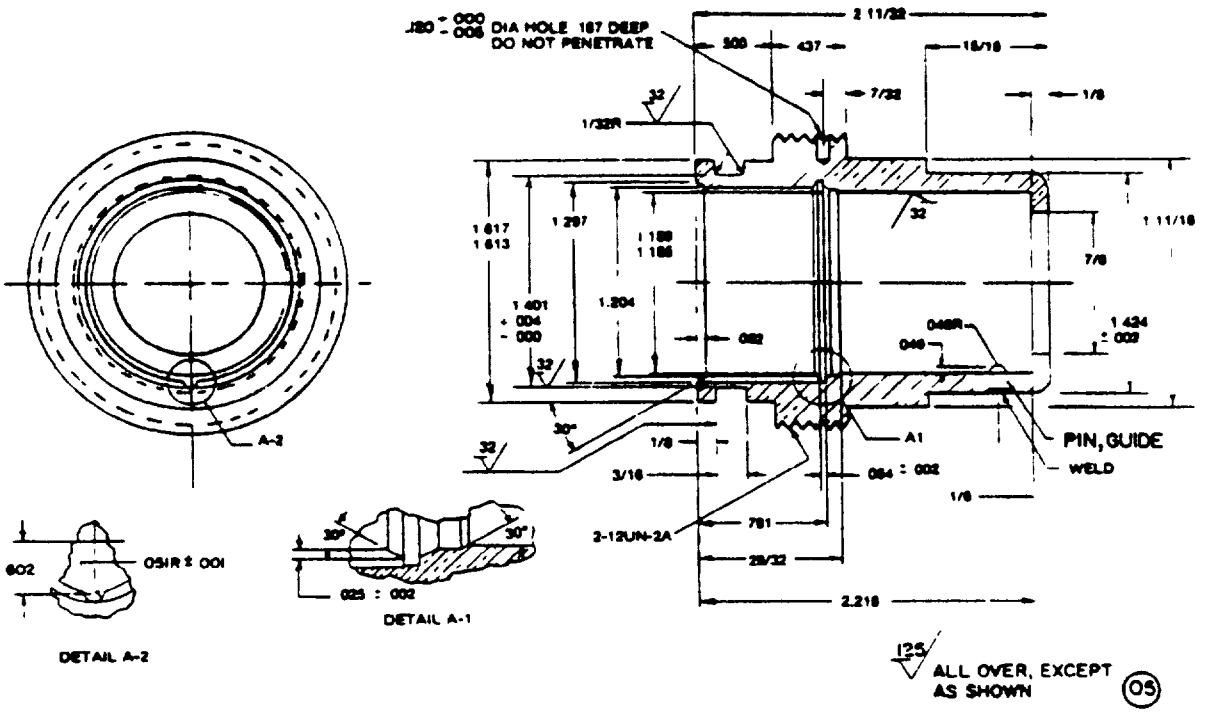


FIGURE 2. Receptacle, body - M24231/13-010. (05)

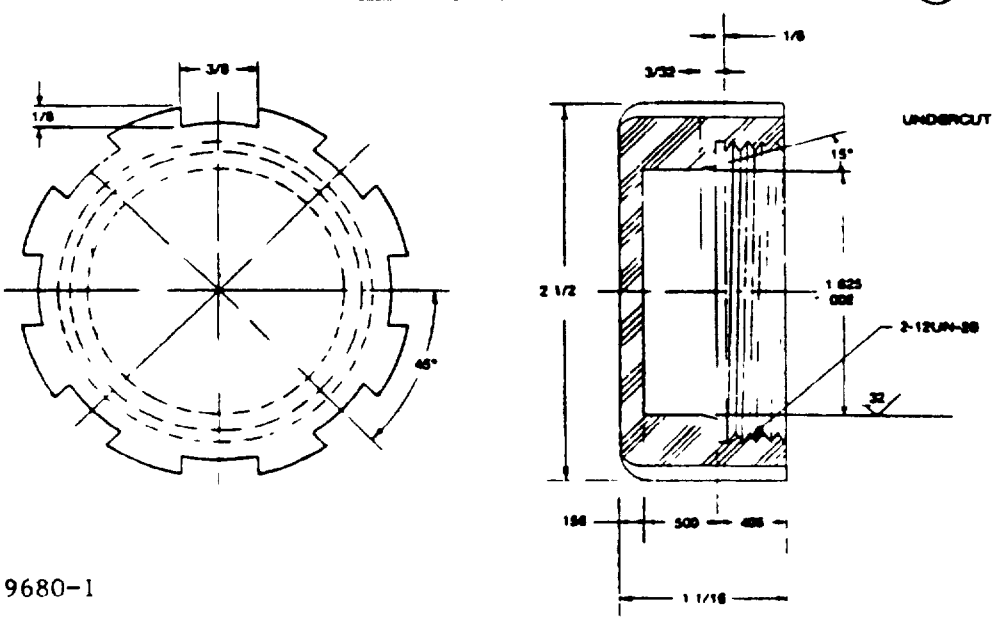


SH 9680-1

FIGURE 3. Cap - M24231/13-011. (15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.

CONNECTIONS FOR 24231/13-020		
PIN NO	COND COLOR	COND
1	BLACK	SHIELDED CABLE NO 1
2	WHITE	
7	SHIELD	
3	BLACK	SHIELDED CABLE NO 2
4	WHITE	
7	SHIELD	
5	BLACK	TYPE B-16
6	BLACK	TYPE B-16

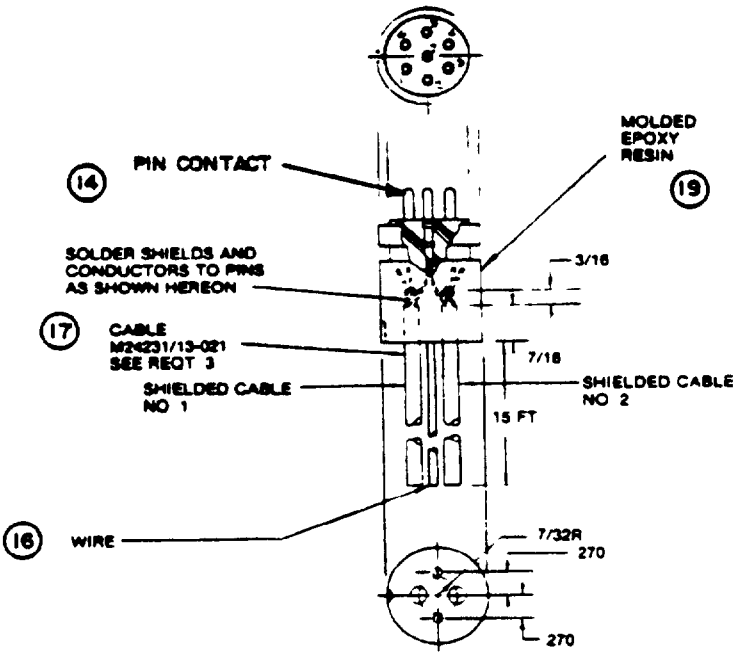


ASSEMBLY, INSERT, MOLDED M24231/13-020
SAME AS M24231/7-010 EXCEPT AS SHOWN)

CONNECTIONS FOR M24231/13-030		
PIN NO	COND COLOR	COND
1	BLACK	SHIELDED CABLE NO 1
4	WHITE	
7	SHIELD	
2	BLACK	SHIELDED CABLE NO 2
3	WHITE	
NOT CONNEC	SHIELD	
5	BLACK	TYPE B-16
6	BLACK	TYPE B-16

ASSEMBLY INSERT MOLDED M24231/13-030
SAME AS M24231/13-020 EXCEPT PIN
CONNECTORS TO BE IN ACCORDANCE WITH
M24231/13-030 TABLE

SH 9680-2

FIGURE 4. Assembly, insert molded. (06) (07) (08)
(Same as item 05, except as shown)



Assembly insert molded M24231/13-040
Same as M24231/13-020 except as shown.
Pin configuration same as M24231/9-20.
Connections shall be in accordance with ordering data.

SH 131896

FIGURE 5. Assembly, insert molded. (09)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figures.
2. Cable shall be type 2SWU-1 in accordance with MIL-C-24643/33 and type 7SS-2 and FSS-2 in accordance with MIL-C-915/8.
3. Specify connections, if required, for nine-pin connector.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item no. 1/	Description 2/	Quantity for M24231/13- 3/				Material/specification	Remarks
		001	002	003	004		
01	Connector, receptacle, 7-conductor, symbol no. 737.1	1				-----	See figure 1
02	Connector, receptacle, 7-conductor, symbol no. 737.6		1			-----	See figure 1
03	Connector, receptacle, 7-conductor symbol no. 737.9			1		-----	See figure 1
04	Connector, receptacle, 9-conductor				1	-----	See figure 1
05	Body, receptacle	1	1	1	1	Ni-Cu, class A, QQ-N-281	See figure 2
06	Insert assembly, molded	1				See items 14, 16, 17, and 19	See figure 4
07	Insert assembly, molded		1			See items 14, 16, 17, and 19	See figure 4
08	Insert assembly, molded			1		See items 14, 16, 17, and 19	See figure 4
09	Insert assembly, molded				1	See items 14, 16, 17, and 19	See figure 5
10	Insert	1	1	1	1	M24231/5-077	See figure 1

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list. - Continued

Item 1/ no.	Description 2/	Quantity for M24231/13- 3/ 001	002	003	004	Material/specification	Remarks
11	Gasket, O-ring	1	1	1	1	MS28775-213	See figure 1
12	Gasket, O-ring	1	1	1	1	MS28775-220	See figure 1
13	Pin, guide	1	1	1	1	M24231/12-012	See figure 1 and 2
14	Pin, contact	7	7	7	9	MIL-C-24231	See figure 4
15	Cap, pressure-proof	1	1	1	1	Ni-Al-BRZ, QQ-C-465 4/	See figure 3
16	Wire	As required				Type B-16, MIL-W-16878/1	See figure 4
17	Cable	As required				MIL-C-24643/33	See figure 4 and requirement 2
18	Ring, retaining	1	1	1	1	M24231/7-041	See figure 1
19	Epoxy resin, molded	As required				Cast epoxy resin compound 5/	See figure 4

1/ Item numbers are the same as encircled numbers shown on figures.
2/ See applicable figure or table listed in remarks column for part numbers and dimensions.
3/ Quantity is for one complete assembly of each size.
4/ May be high impact plastic, PVC, coml when pressure-proof cap is not specified (see 3.4.4.1).
5/ Arcoset No. 200, H.M. Reif and Co., Rockledge, PA, or Phillicast No. 2, Philadelphia Resin Corp., Montgomeryville, PA, or equal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Unless otherwise indicated, tolerances shall be as follows:

   (a) Decimals - plus or minus 0.005 inch.
   (b) Fractions - plus or minus 1/64 inch.
   (c) Angular dimensions - plus or minus 1/2 degree.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N279-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:14Z
Check the source to verify that this is the current version before use.