MIL-C-24231/14D(SH)
15 May 1987
SUPERSEDING
MIL-C-24231/14C(SHIPS)
30 August 1976
(See note 3)

MILITARY SPECIFICATION SHEET


CONNECTORS, RECEPTACLE, MULTI-PIN, TYPE V, 14-, 24-, 30-, AND 40-CONDUCTOR

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the receptacle described herein shall consist of this specification and the latest issue of MIL-C-24231.

AMSC N/A
FSC 5935
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.

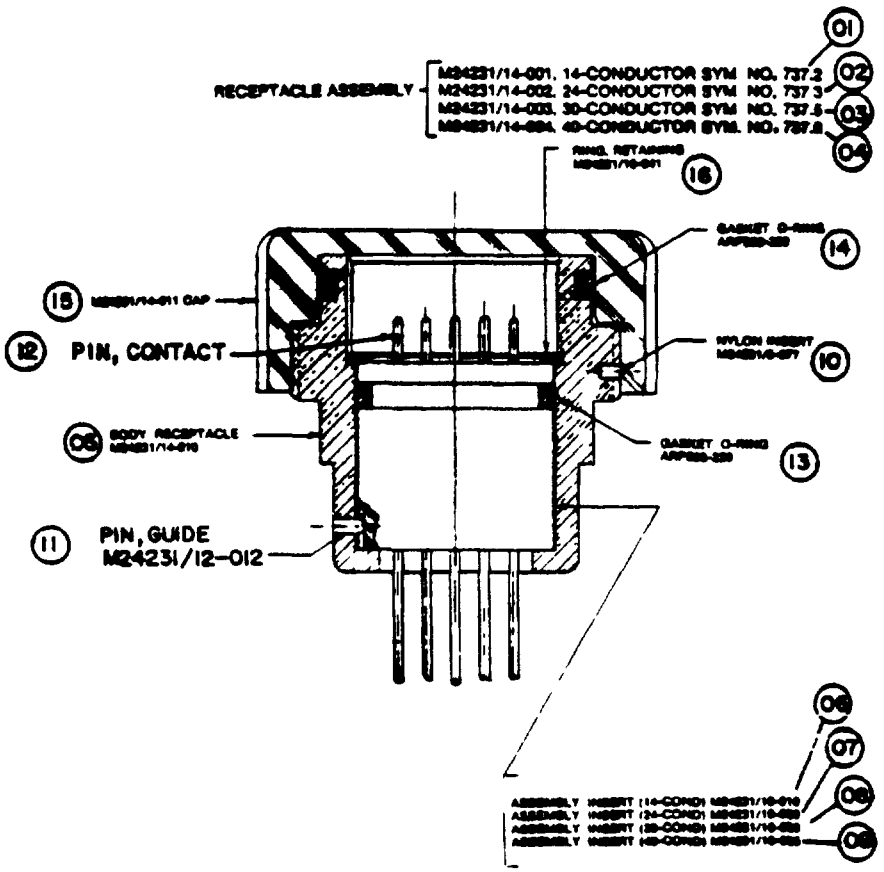

SH 9681

FIGURE 1. Connector, multi-pin receptacle - typical.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.


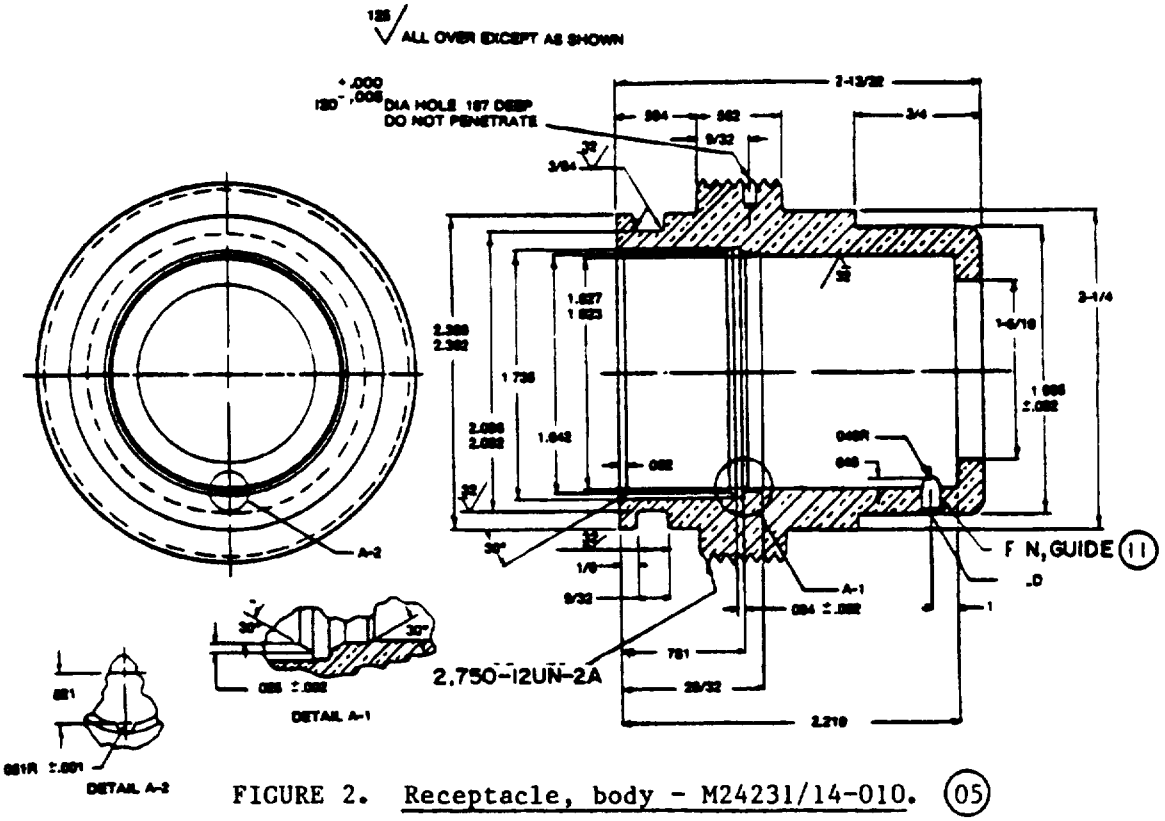


FIGURE 2. Receptacle, body - M24231/14-010. (05)

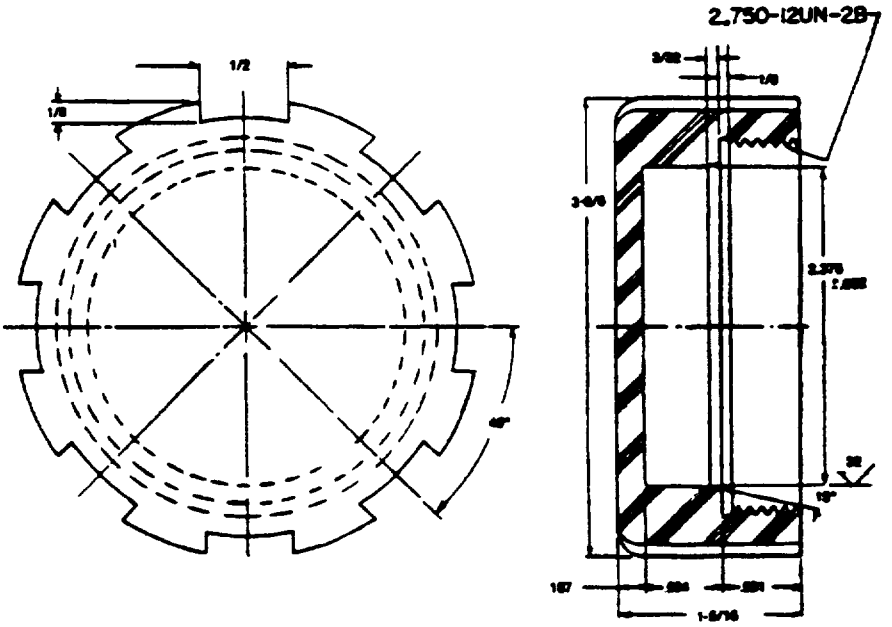

SH 9681-1

FIGURE 3. Cap, M24231/14-011. (15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.

REQUIREMENT:

1. Dimensions and configuration: See figures.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item 1/ no.	Description 2/	Quantity for M24231/14- 3/				Material/specification	Remarks
		001	002	003	004		
01	Connector, receptacle, 14-conductor, symbol no. 737.2	1				-----	See figure 1
02	Connector, receptacle, 24-conductor, symbol no. 737.3		1			-----	See figure 1
03	Connector, receptacle, 30-conductor, symbol no. 737.5			1		-----	See figure 1
04	Connector, receptacle, 40-conductor, symbol no. 737.8				1	-----	See figure 1
05	Body, receptacle	1	1	1	1	Ni-Cu, class A, QQ-N-281	See figure 2
06	Insert assembly, molded	1				M24231/10-010	See figure 1
07	Insert assembly, molded		1			M24231/10-020	See figure 1
08	Insert assembly, molded			1		M24231/10-030	See figure 1
09	Insert assembly, molded				1	M24231/10-035	See figure 1
10	Insert	1	1	1	1	M24231/5-077	See figure 1
11	Pin, guide	1	1	1	1	M24231/12-012	See figure 2

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list. - Continued

Item 1/ no.	Description 2/	Quantity for M24231/14- 3/				Material/specification	Remarks
		001	002	003	004		
12	Pin, contact	14	24	30	40	MIL-C-24231	Integral to molded insert assemblies 06, 07, 08 and 09, see figure 1
13	Gasket, O-ring	1	1	1	1	MS28775-220	Lubricate with silicone compound MIL-S-8660, see figure 1
14	Gasket, O-ring	1	1	1	1	MS28775-329	Same as item 13.
15	Cap, pressure-proof	1	1	1	1	Ni-Al-BRZ, QQ-C-465 4/	See figure 3
16	Ring, retaining	1	1	1	1	M24231/10-041	See figure 1

1/ Item numbers are the same as encircled numbers shown on figures.
2/ See applicable figure or table listed in remarks column for part numbers and dimensions.
3/ Quantity is for one complete assembly of each size.
4/ May be high impact plastic, PVC, coml when pressure-proof cap is not specified (see 3.4.4.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Unless otherwise indicated, tolerances shall be as follows:

   (a) Decimals - plus or minus 0.005 inch.
   (b) Fractions - plus or minus 1/64 inch.
   (c) Angular dimensions - plus or minus 1/2 degree.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N279-14)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.