INCH-POUND
MIL-DTL-24231/14E(SH)
26 April 2013
SUPERSEDING
MIL-C-24231/14D(SH)
15 May 1987

DETAIL SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, MULTI-PIN, TYPE V, 14-, 24-, 30-, AND 40- CONDUCTOR

This specification is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24231.

REQUIREMENTS:

1. Dimensions and configuration: see figures 1 through 3.
2. All dimensions are in inches.
3. Tolerances shall be as follows, or as stated:

a. Decimals – ±0.005 inch.
b. Fractions – ±1/64 inch.
c. Angular dimensions – ±½degree.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.

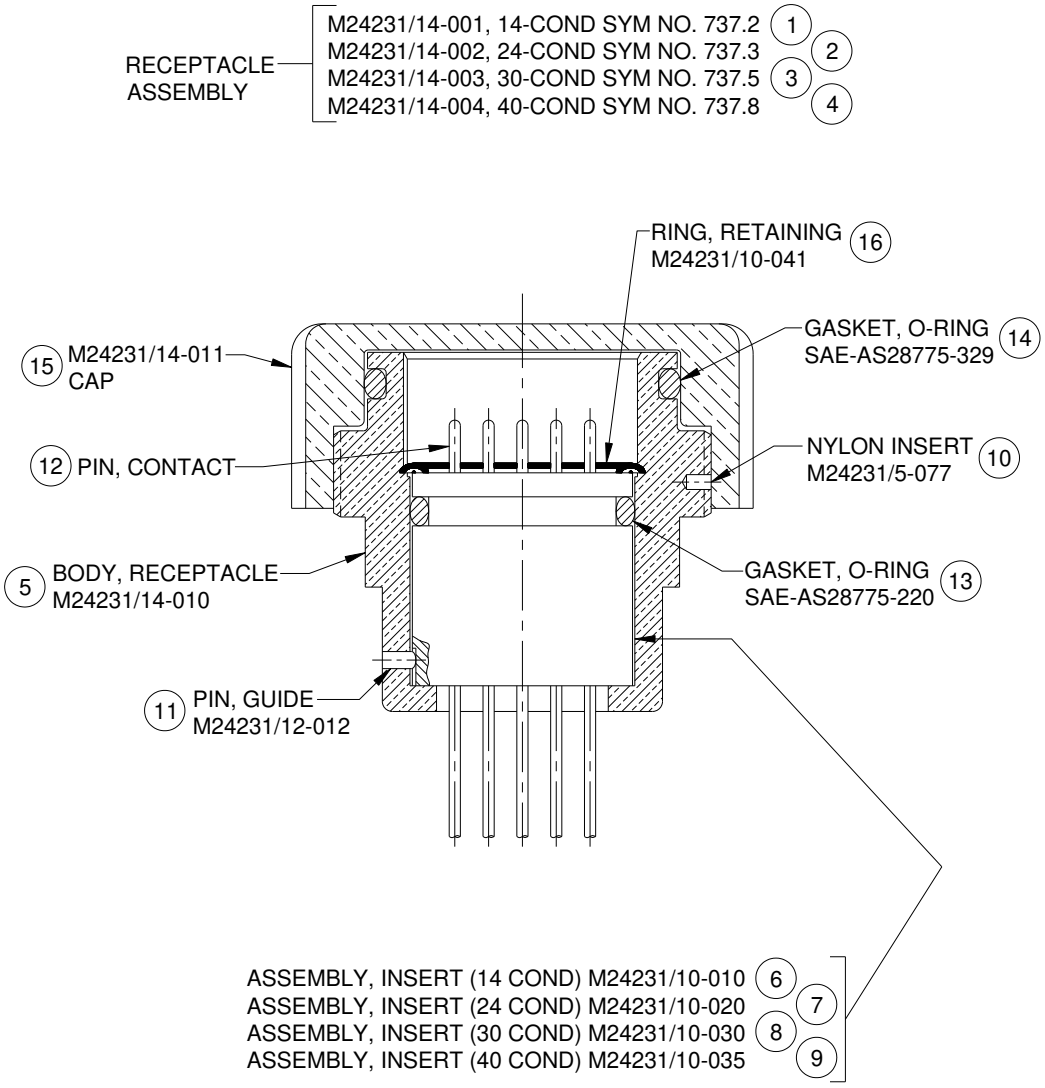


FIGURE 1. Connector, multi-pin receptacle – typical.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.

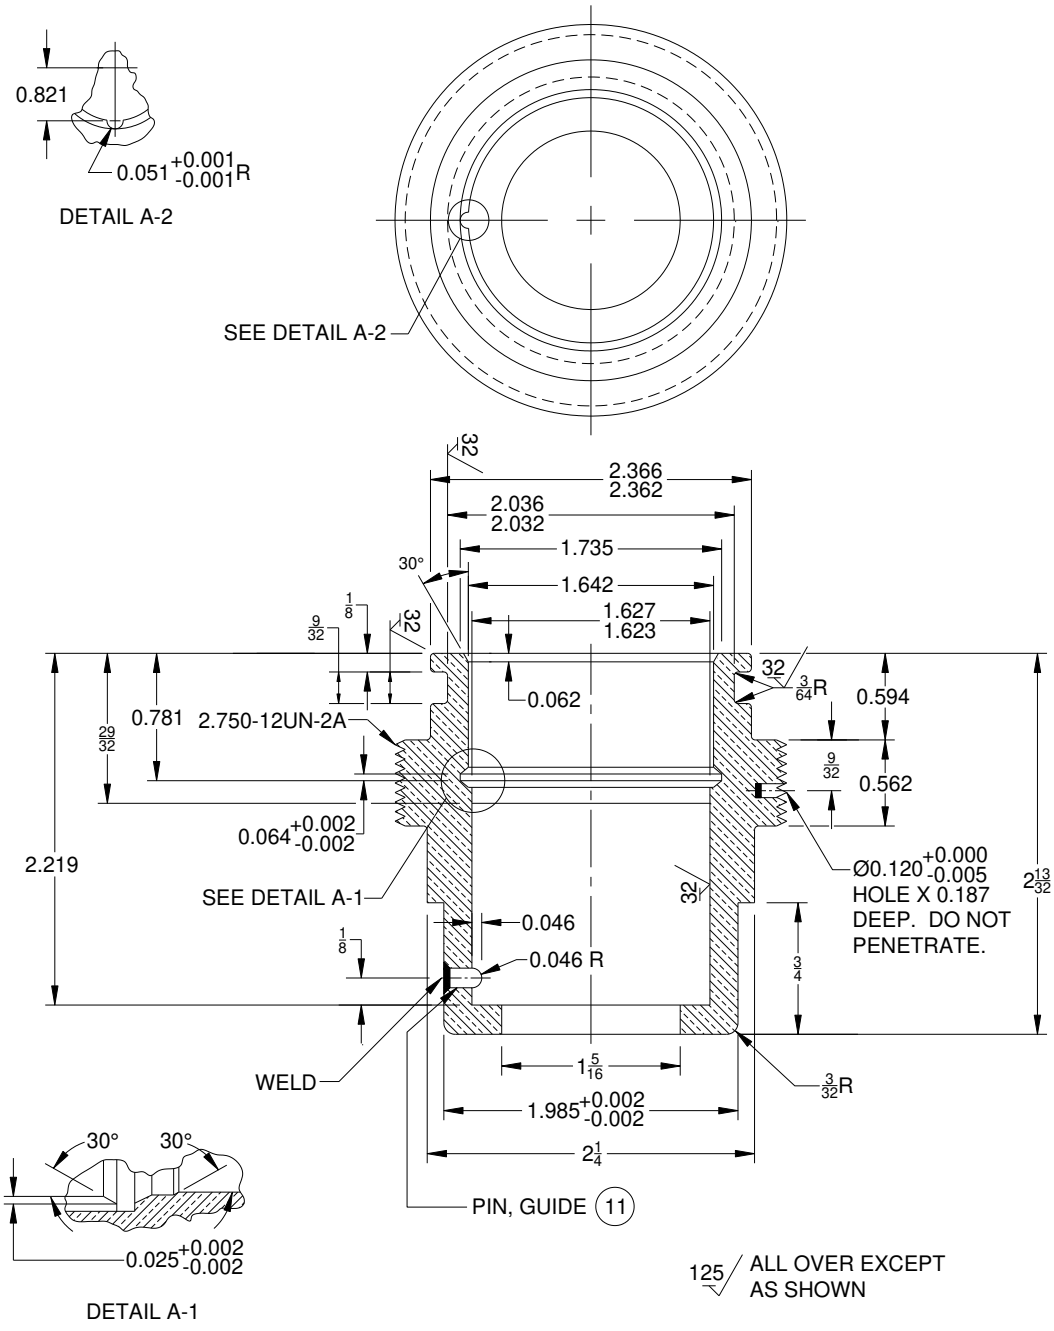


FIGURE 2. Receptacle, body – M24231/14-010. (5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.

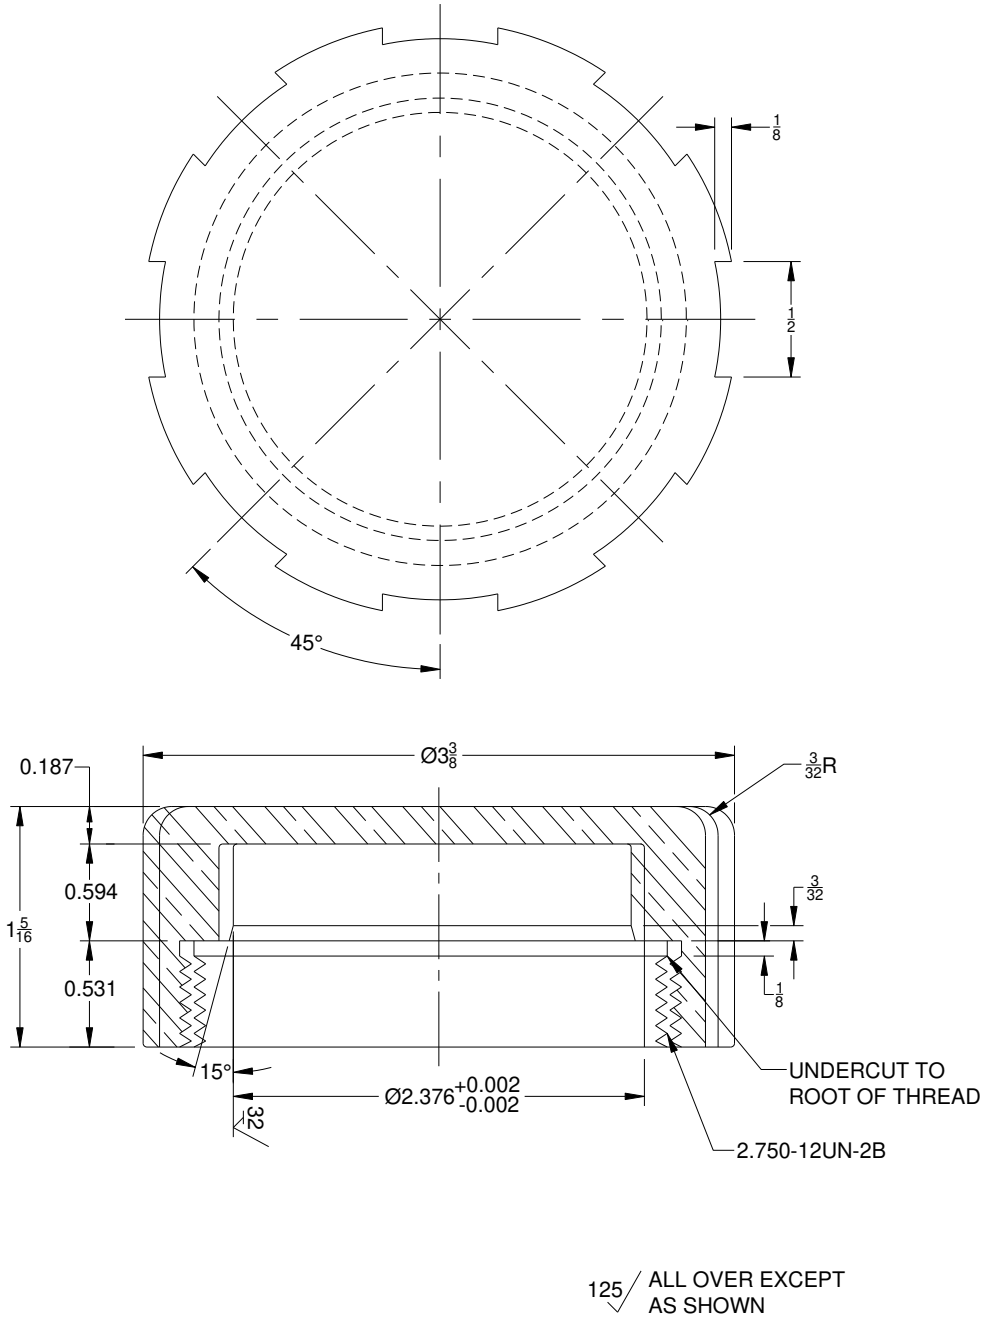


FIGURE 3. Cap, M24231/14-011. (15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item no. [1/]	Description [2/]	Quantity for M24231/14- [3/]				Material/specification	Remarks
		001	002	003	004		
1	Connector, receptacle, 14-conductor, symbol no. 737.2	1				-----	See figure 1.
2	Connector, receptacle, 24-conductor, symbol no. 737.3		1			-----	See figure 1.
3	Connector, receptacle, 30-conductor, symbol no. 737.5			1		-----	See figure 1.
4	Connector, receptacle, 40-conductor, symbol no. 737.8				1	-----	See figure 1.
5	Body, receptacle	1	1	1	1	Ni-Cu, Class A, QQ-N-281	See figure 2.
6	Insert assembly, molded	1				M24231/10-010	See figure 1.
7	Insert assembly, molded		1			M24231/10-020	See figure 1.
8	Insert assembly, molded			1		M24231/10-030	See figure 1.
9	Insert assembly, molded				1	M24231/10-035	See figure 1.
10	Insert	1	1	1	1	M24231/5-077	See figure 1.
11	Pin, guide	1	1	1	1	M24231/12-012	See figure 2.
12	Pin, contact	14	24	30	40	MIL-DTL-24231	Integral to molded insert assemblies 6, 7, 8, and 9; see figure 1.
13	Gasket, O-ring	1	1	1	1	SAE-AS28775-220 [4/]	Lubricate with silicone compound SAE-AS8660; see figure 1.
14	Gasket, O-ring	1	1	1	1	SAE-AS28775-329 [4/]	Same as item 13.
15	Cap, pressure-proof	1	1	1	1	Ni-Al-BRZ, ASTM B150/B150M [5/]	See figure 3.
16	Ring, retaining	1	1	1	1	M24231/10-041	See figure 1.

NOTES:

1/ Item numbers are the same as encircled numbers shown on figures.

2/ See applicable figure or table listed in remarks column for part numbers and dimensions.

3/ Quantity is for one complete assembly of each size.

4/ Nitrile (Buna N); Parker Hannifin Corporation (part number N0756-75), O-ring Division, 2360 Palumbo Drive, Lexington, KY 40509, CAGE 02697, or equal.

5/ May be high impact plastic, PVC, commercial when pressure-proof cap is not specified (see requirement for pressure-proof caps in MIL-DTL-24231).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Preparing activity:
Navy – SH
(Project 5935-2011-063)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.