MIL-C-24231/15D(SH)
15 May 1987
SUPERSEDING
MIL-C-24231/15C(SHIPS)
30 August 1976
(See note 3)

MILITARY SPECIFICATION SHEET


CONNECTOR, ADAPTER, FOR MOLDED PLUG, TYPE II, THREE- AND FOUR-CONDUCTOR

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the adapter described herein shall consist of this specification and the latest issue of MIL-C-24231.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A Approved for public release, distribution unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.

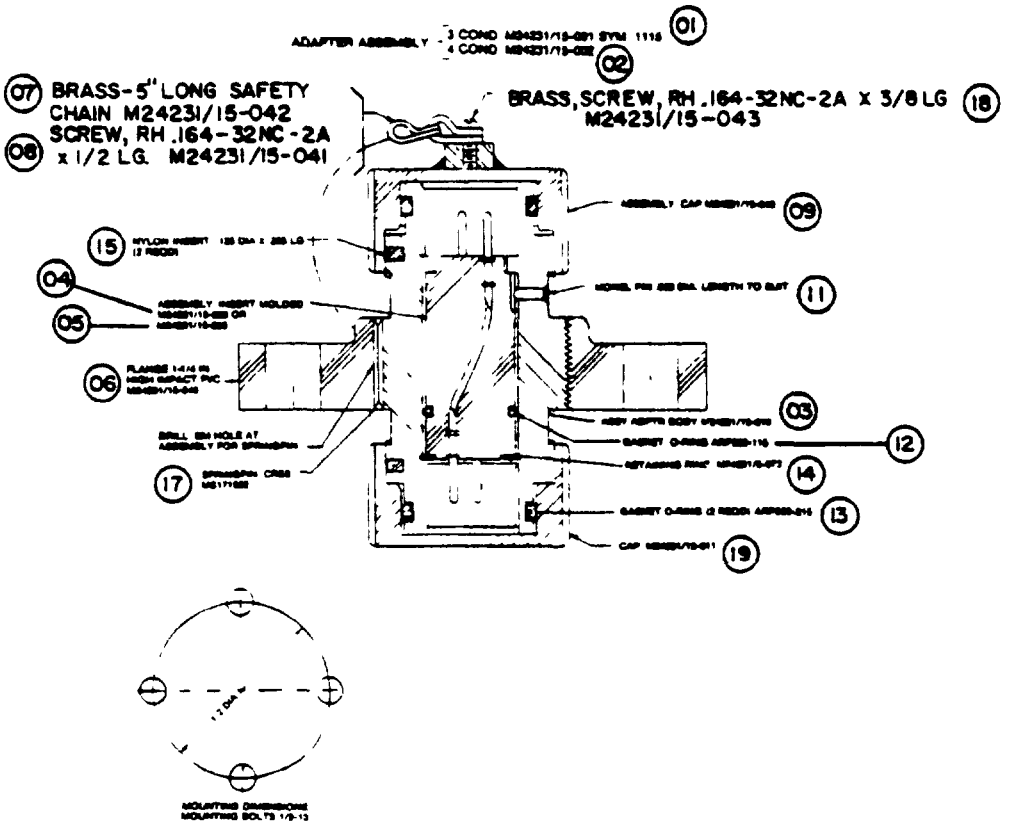

SH 9682

FIGURE 1. Connector, adapter - typical.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.

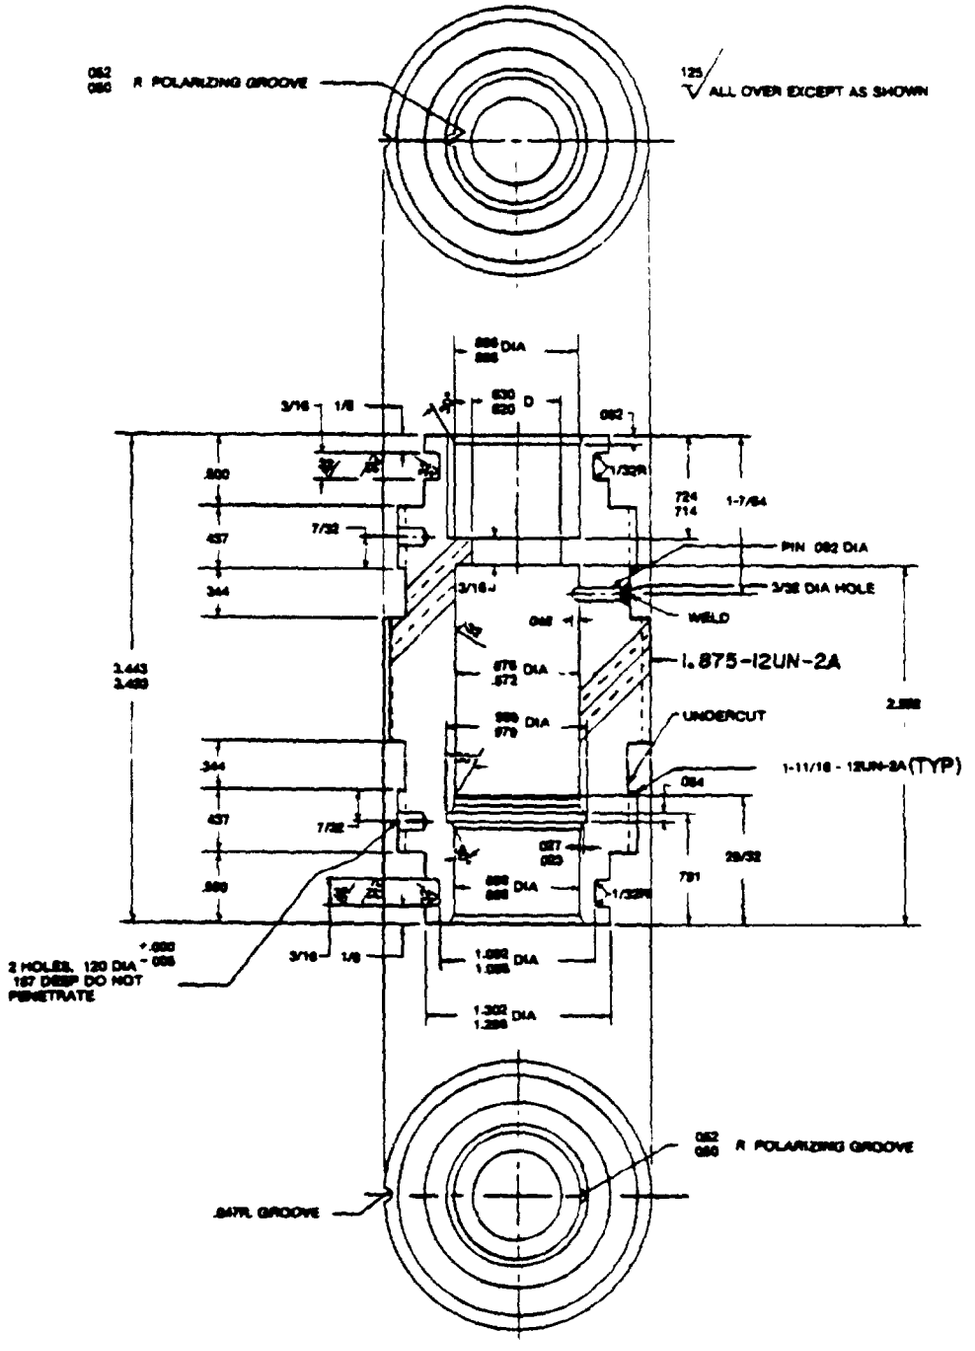

SH 9682-1

FIGURE 2. Assembly, adapter body - M24231/15-010. (03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.

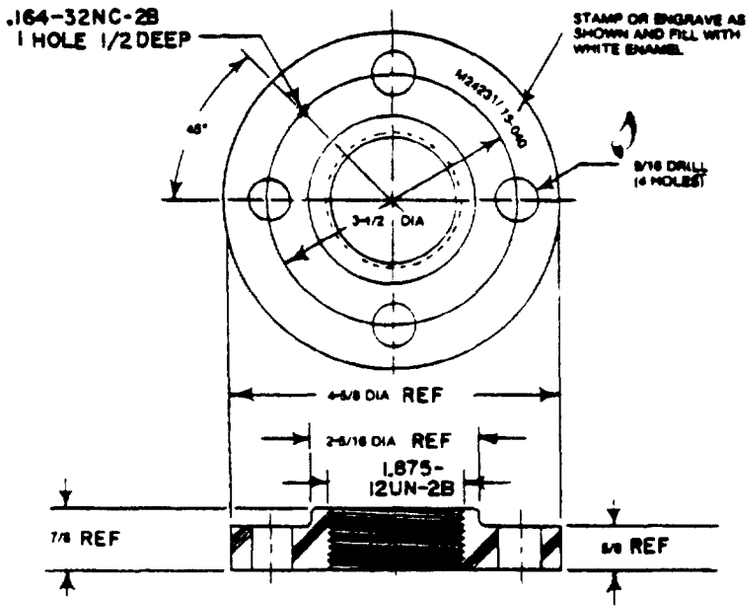


FIGURE 3. Flange - M24231/15-040. (06)

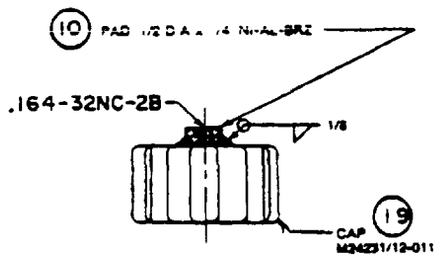


FIGURE 4. Assembly, cap - M24231/15-040. (09)

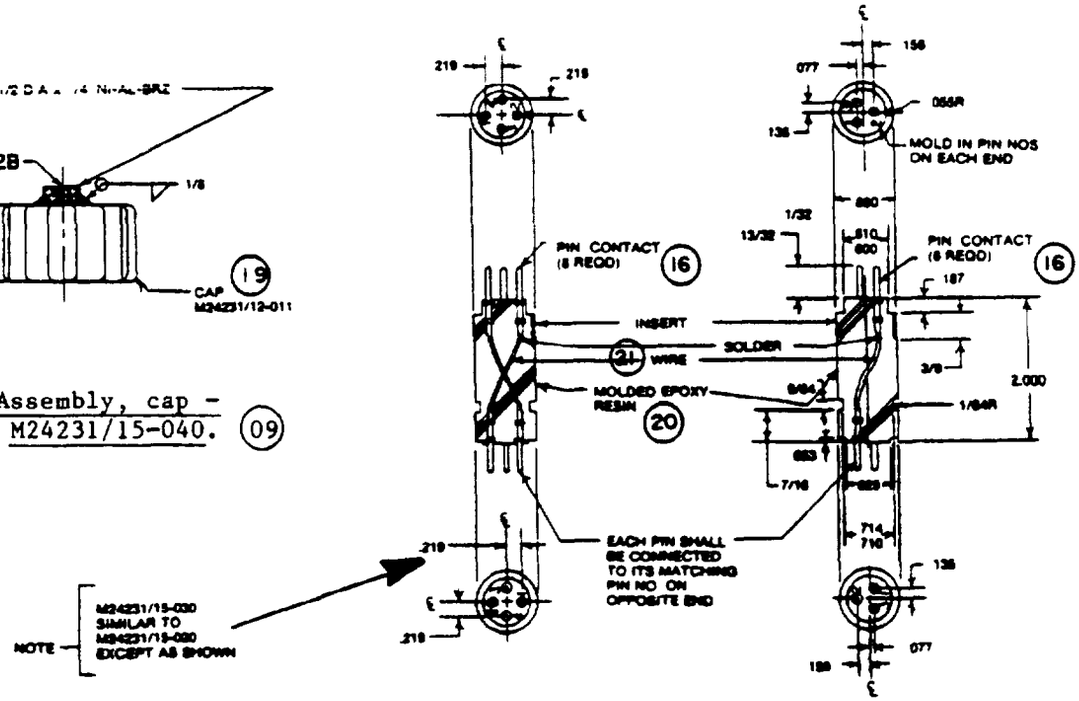


FIGURE 5. Assembly, insert, molded - M24231/15-030. (05) (4-conductor)

FIGURE 6. Assembly, insert, molded - M24231/15-020. (04) (3-conductor)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figures.
2. Material for adapter body shall be manufactured from nickel-copper alloy in accordance with class A, form 1, hot finished condition of QQ-N-281 with a minimum yield strength of 40,000 lbf/in^2 at 0.2 percent offset, or nickel-copper alloy in accordance with class A, form 1, cold drawn condition of QQ-N-281 with a minimum yield strength of 50,000 lbf/in^2 at 0.2 percent offset.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item 1/ no.	Description 2/	Quantity for M24231/15- 3/ 001	002	Material/specification	Remarks
01	Connector, adapter, 3-conductor, symbol no. 1115	1		-----	See figure 1
02	Connector, adapter, 4-conductor		1	-----	See figure 1
03	Body, adapter	1	1	Ni-Cu, class A, QQ-N-281	See figure 2
04	Insert assembly, molded 3-conductor	1		See items 16, 20, and 21	See figure 6
05	Insert assembly, molded 4-conductor		1	See items 16, 20, and 21	See figure 5
06	Flange, 1-1/4 inch			High impact PVC, coml	See figure 3
07	Chain, safety, 5 inch long	1	1	Brass, coml 4/	See figure 1
08	Screw, roundhead 0.164-32NC-2A by 1/2 long	1	1	Brass, coml	See figure 1
09	Cap, pressure-proof	1	1	M24231/12-011, modified as shown 6/	See figure 4
10	Pad, 1/2 diameter by 1/4 long	1	1	Ni-Al-BRZ, QQ-C-465	See figure 4
11	Pin, guide	1	1	M24231/12-012	See figure 1

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list. - Continued

Item 1/ no.	Description 2/	Quantity for M24231/15- 3/ 001	Quantity for M24231/15- 3/ 002	Material/specification	Remarks
12	Gasket, O-ring	1	1	MS28775-115	Lubricate with silicone compound, MIL-S-8660
13	Gasket, O-ring	2	2	MS28775-215	See item 12
14	Ring, retaining	1	1	M24231/5-073	See figure 1
15	Insert	2	2	M24231/5-077	See figure 1
16	Pin, contact	6	8	MIL-C-24231	See figures 5 and 6
17	Pin, spring	1	1	CRES, MS171502	See figure 1
18	Brass Screw, roundhead, RH 0.164-32NC-2A by 3/8 long	1	1	Brass, coml	See figure 1
19	Cap, assembly	1	1	M24231/12-011 6/	See figure 1
20	Epoxy resin, molded	As required		Cast epoxy resin compound 5/	See figures 5 and 6
21	Wire	As required		Type B-16, MIL-W-16878/1	See figures 5 and 6

1/ Item numbers are the same as encircled numbers shown on figures.
2/ See applicable figure or table listed in remarks column for part numbers and dimensions.
3/ Quantity is for one complete assembly of each size.
4/ Safety chains shall be coated with gray plastisol in accordance with MIL-P-20689, or covered with sleeving in accordance with size number 1, 0.294 id, type F, subform Ua, grade A, class II, category 1, white of MIL-I-631, for noise reduction.
5/ Arcoset No. 200, M.M. Reif and Co., Rockledge, PA, or Phillicast No. 2, Philadelphia Resin Corp., Montgomeryville, PA, or equal.
6/ Cap material shall be Ni-Al-BRZ, QQ-C-465 for use with item 17.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Unless otherwise indicated, tolerances shall be as follows:

   (a) Decimals - plus or minus 0.005 inch.
   (b) Fractions - plus or minus 1/64 inch.
   (c) Angular dimensions - plus or minus 1/2 degree.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N279-15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.