INCH-POUND
MIL-DTL-24231/15E(SH)
26 April 2013
SUPERSEDING
MIL-C-24231/15D(SH)
15 May 1987

DETAIL SPECIFICATION SHEET

CONNECTOR, ADAPTER, FOR MOLDED PLUG, TYPE II, THREE- AND FOUR-CONDUCTOR

This specification is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24231.

REQUIREMENTS:

1. Dimensions and configuration: see figures 1 through 6.

2. Material for adapter body shall be manufactured from nickel-copper alloy in accordance with Class A, Form 1, hot-finished condition of QQ-N-281 with a minimum yield strength of 40,000 lbf/in^2 at 0.2 percent offset, or nickel-copper alloy in accordance with Class A, Form 1, cold-drawn condition of QQ-N-281 with a minimum yield strength of 50,000 lbf/in^2 at 0.2 percent offset.

3. All dimensions are in inches.

4. Tolerances shall be as follows, or as stated:

a. Decimals – ±0.005 inch.

b. Fractions – ±1/64 inch.

c. Angular dimensions – ±½degree.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.

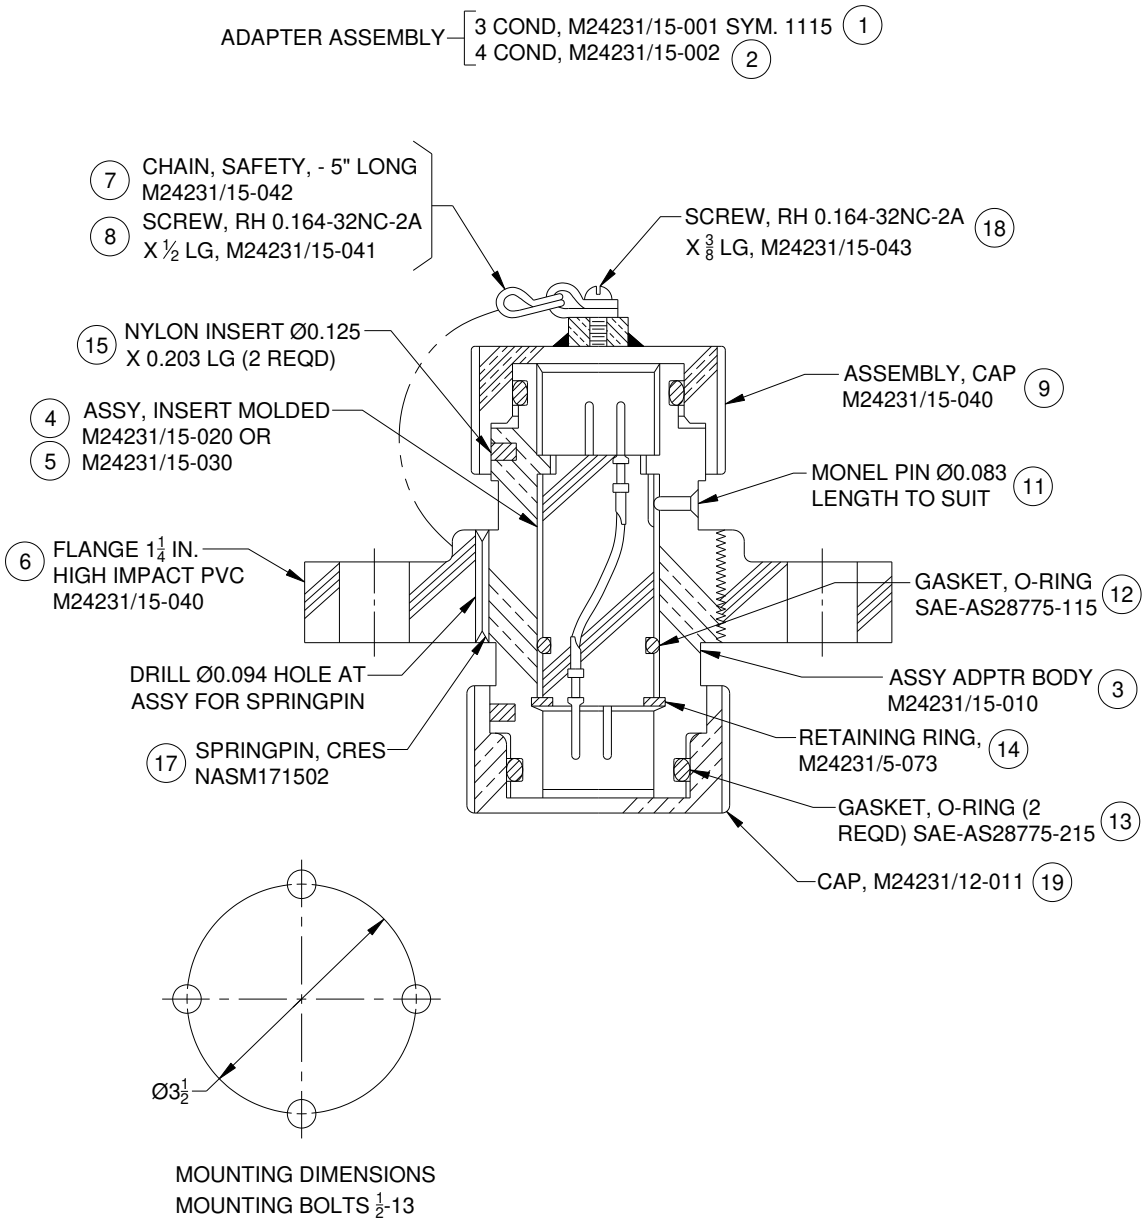


FIGURE 1. Connector, adapter – typical.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.

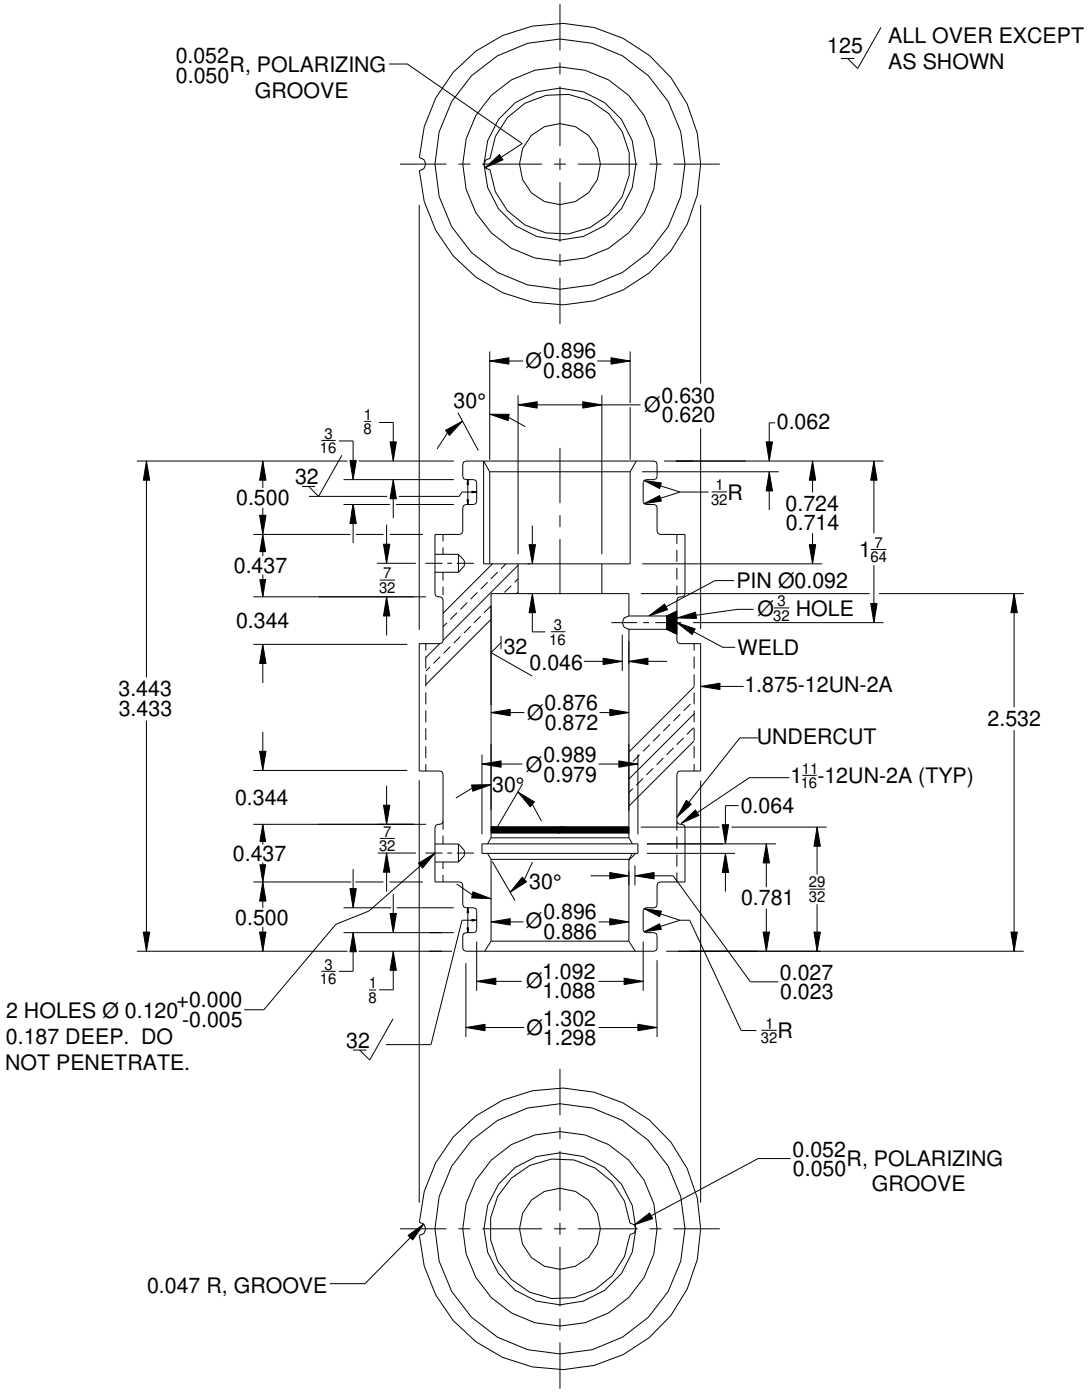


FIGURE 2. Assembly, adapter body – M24231/15-010. (3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.

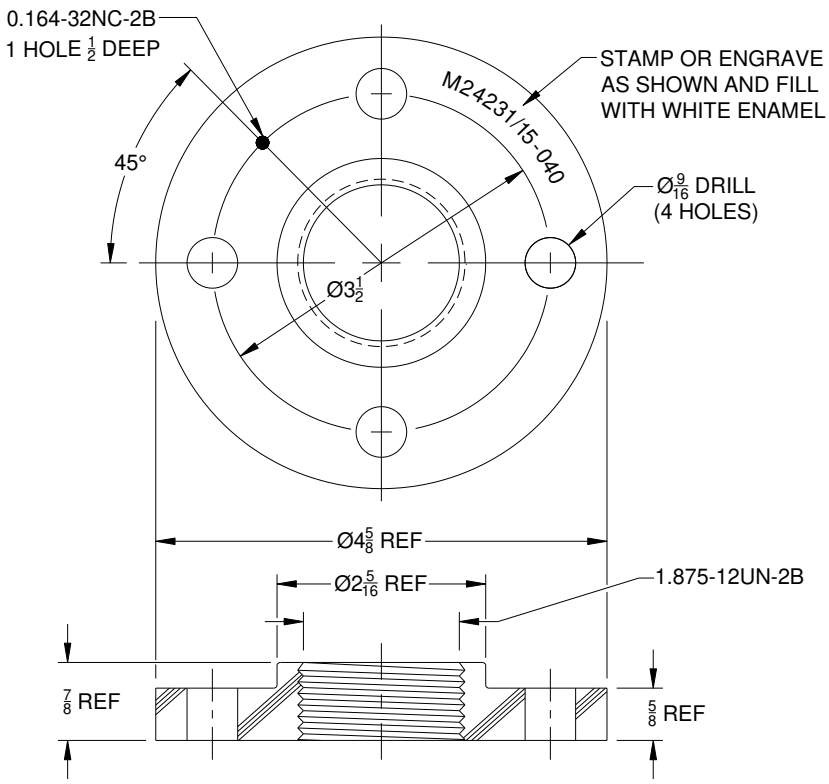


FIGURE 3. Flange – M24231/15-040. (6)

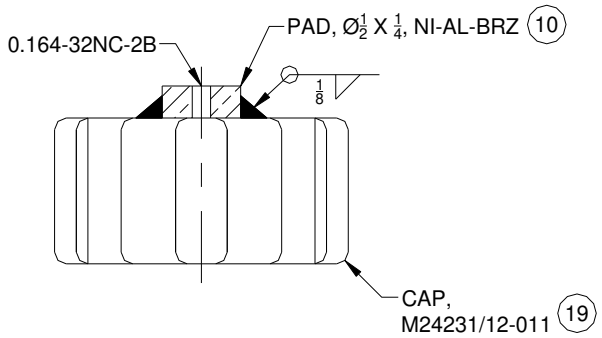


FIGURE 4. Assembly, cap – M24231/15-040. (9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.

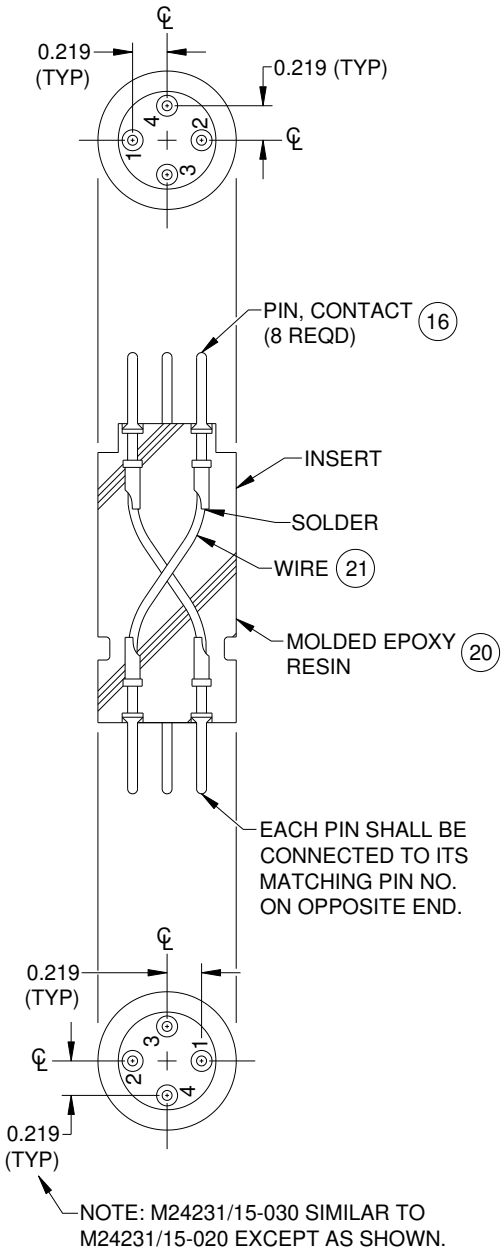


FIGURE 5. Assembly, insert, molded – M24231/15-030 (4-conductor). (5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.

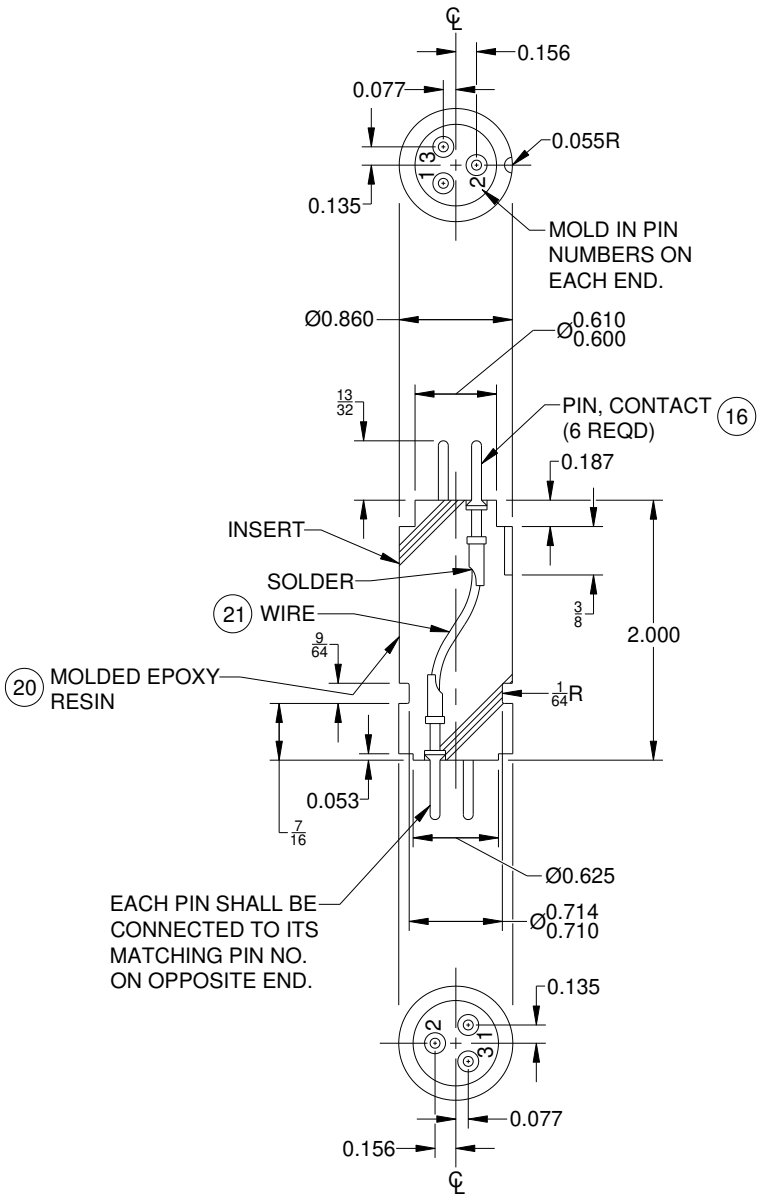


FIGURE 6. Assembly, insert, molded – M24231/15-020 (3-conductor). (4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item no. 1/	Description 2/	Quantity for M24231/15- 3/		Material/specification	Remarks
		001	002		
1	Connector, adapter, 3-conductor, symbol no. 1115	1		-----	See figure 1.
2	Connector, adapter, 4-conductor		1	-----	See figure 1.
3	Body, adapter	1	1	Ni-Cu, Class A, QQ-N-281	See figure 2 and requirement 2.
4	Insert assembly, molded 3-conductor	1		See items 16, 20, and 21.	See figure 6.
5	Insert assembly, molded 4-conductor		1	See items 16, 20, and 21.	See figure 5.
6	Flange, 1¼ inch	1	1	High impact PVC, coml	See figure 3.
7	Chain, safety, 5 inch long	1	1	Brass, coml 4/	See figure 1.
8	Screw, roundhead 0.164-32NC-2A by ½ long	1	1	Brass, coml	See figure 1.
9	Cap, pressure-proof	1	1	M24231/12-011, modified as shown 5/	See figure 4.
10	Pad, ½ diameter by ¼ long	1	1	Ni-Al-BRZ, ASTM B150/B150M	See figure 4.
11	Pin, guide	1	1	M24231/12-012	See figure 1.
12	Gasket, O-ring	1	1	SAE-AS28775-115 6/	Lubricate with silicone compound, SAE-AS8660; see figure 1.
13	Gasket, O-ring	2	2	SAE-AS28775-215 6/	See item 12.
14	Ring, retaining	1	1	M24231/5-073	See figure 1.
15	Insert	2	2	M24231/5-077	See figure 1.
16	Pin, contact	6	8	MIL-DTL-24231	See figure 5 and figure 6.
17	Pin, spring	1	1	CRES, NASM 171502	See figure 1.
18	Screw, roundhead, RH 0.164-32NC-2A by ⅜ long	1	1	Brass, coml	See figure 1.
19	Cap, assembly	1	1	M24231/12-011 5/	See figure 1.
20	Epoxy resin, molded	As required		Cast epoxy resin compound 7/	See figure 5 and figure 6.
21	Wire	As required		Type B-16, SAE-AS22759/11	See figure 5 and figure 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list – Continued.

NOTES:

1/ Item numbers are the same as encircled numbers shown on figures.

2/ See applicable figure or table listed in remarks column for part numbers and dimensions.

3/ Quantity is for one complete assembly of each size.

4/ Safety chains shall be coated with gray plastisol or covered with sleeving in accordance with MIL-I-631 (size number 1, 0.294 id, Subform U_a, Grade a, Class II, Category 1, color white) for noise reduction.

5/ Cap material shall be Ni-Al-BRZ, ASTM B150/B150M.

6/ Nitrile (Buna N); Parker Hannifin Corporation (part number N0756-75), O-ring Division, 2360 Palumbo Drive, Lexington, KY 40509, CAGE 02697, or equal.

7/ Arco Set 200, M.M. Reif and Co., Ivyland, PA, or PR610- TCF (Chockfast Orange), ITW Philadelphia Resins Corp., Montgomeryville, PA, or equal.

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Preparing activity:
Navy – SH
(Project 5935-2011-064)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:15Z
Check the source to verify that this is the current version before use.