MIL-C-24231/16D(SH)
15 May 1987
SUPERSEDING
MIL-C-24231/16C(SHIPS)
30 August 1976
(See note 3)

MILITARY SPECIFICATION SHEET


CONNECTOR, ADAPTER, FOR MOLDED PLUG, TYPE II, SEVEN-CONDUCTOR

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the adapter described herein shall consist of this specification and the latest issue of MIL-C-24231.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:16Z
Check the source to verify that this is the current version before use.

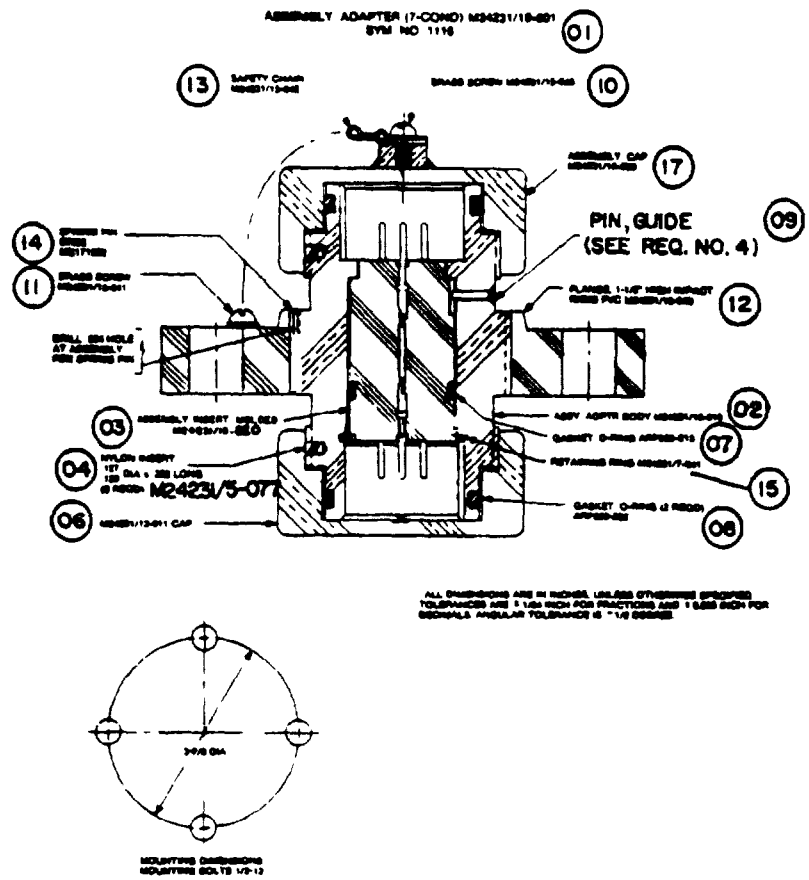

SH 9683

FIGURE 1. Connector, adapter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:16Z
Check the source to verify that this is the current version before use.

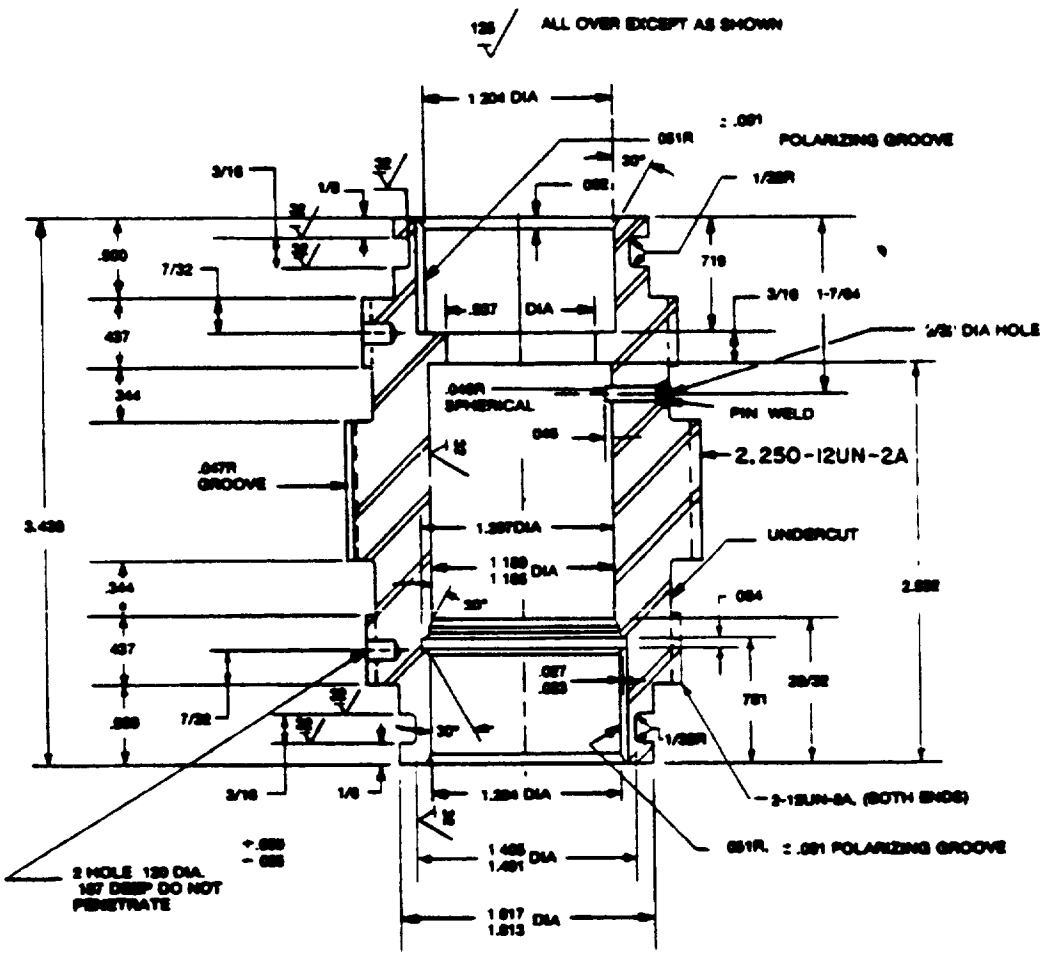

SH 9683-1

FIGURE 2. Assembly, adapter body - M24231/16-010. (02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:16Z
Check the source to verify that this is the current version before use.

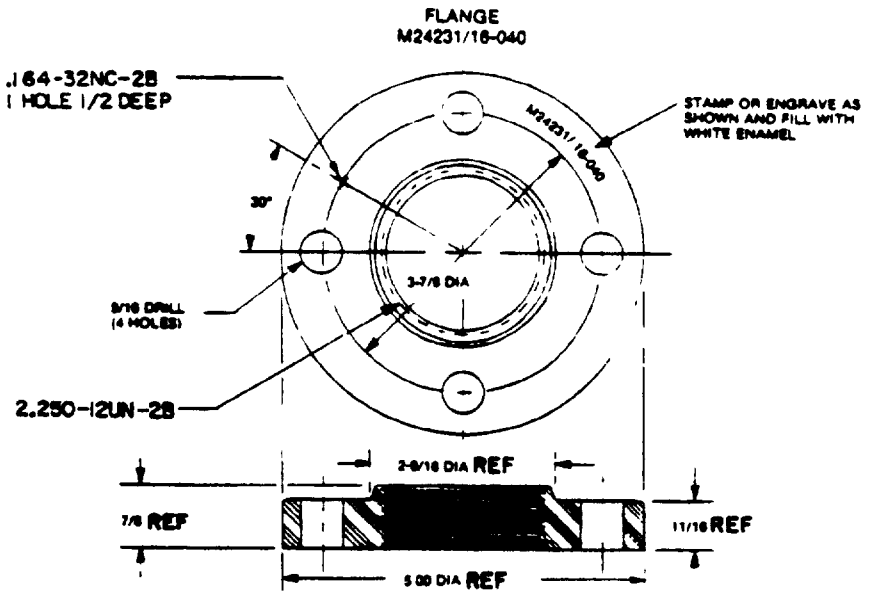


FIGURE 3. Flange - M24231/16-040. (12)

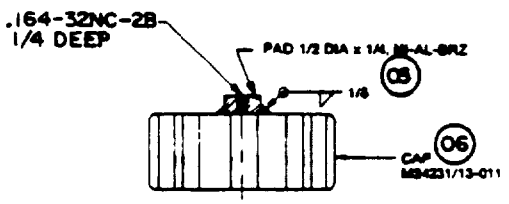


FIGURE 4. Assembly, cap - M24231/16-030. (17)

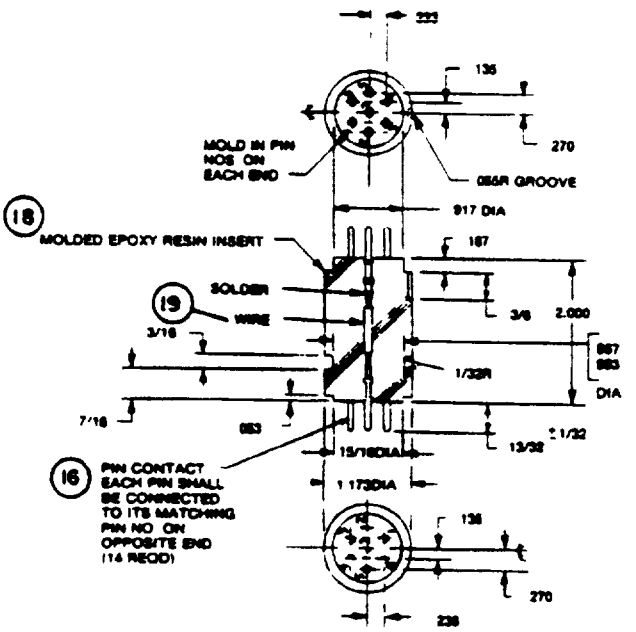


FIGURE 5. Assembly, insert, molded - M24231/16-020. (03)

SH 9683-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:16Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figures.
2. Material for adapter body shall be manufactured from nickel-copper alloy in accordance with class A, form 1, hot finished condition of QQ-N-281 with a minimum yield strength of 40,000 lbf/in^2 at 0.2 percent offset, or nickel-copper alloy in accordance with class A, form 1, cold drawn condition of QQ-N-281 with a minimum yield strength of 50,000 lbf/in^2 at 0.2 percent offset.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:16Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item 1/ no.	Description 2/	Quantity for M24231/16- 3/ 001	Material/specification	Remarks
01	Connector, adapter, 7-conductor, symbol no. 1116	1	-----	See figure 1
02	Body, adapter	1	Ni-Cu, class A, QQ-N-281	See figure 2 and requirement 2
03	Insert, assembly, molded	1	See items 16, 17 and 19	See figure 5
04	Insert	2	M24231/5-077	See figure 1
05	Pad, 1/2 diameter by 1/4	1	Ni-Al-BRZ, QQ-C-465	See figure 4
06	Cap, pressure-proof	1	M24231/13-011 6/	See figure 1
07	Gasket, O-ring	1	MS28775-213	Lubricate with silicone compound, MIL-S-8660
08	Gasket, O-ring	2	MS28775-220	See item 07
09	Pin, guide	4	M24231/12-012	See figure 1
10	Screw, roundhead	1	M24231/15-043	See figure 1
11	Screw, roundhead	1	M24231/15-041	See figure 1
12	Flange, 1-1/2 inch	1	High impact rigid PVC	See figure 3
13	Chain, safety	1	M24231/15-042 4/	See figure 1

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:16Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list. - Continued

Item 1/ no.	Description 2/	Quantity for M24231/16- 3/ 001	Material/specification	Remarks
14	Pin, spring	1	CRES, MS171502	See figure 1
15	Ring, retaining	1	M24231/7-041	See figure 1
16	Pin, contact	14	MIL-C-24231	See figure 5
17	Cap, assembly	1	M24231/13-011, modified as shown 6/	See figure 4
18	Epoxy resin, molded	As required	Cast epoxy resin compound 5/	See figure 5
19	Wire	As required	Type B-16, MIL-W-16878/1	See figure 5

1/ Item numbers are the same as encircled numbers shown on figures.
2/ See applicable figure or table listed in remarks column for part numbers and dimensions.
3/ Quantity is for one complete assembly of each size.
4/ Safety chains shall be coated with gray plastisol in accordance with MIL-P-20689, or covered with sleeving in accordance with size number 1, 0.294 id, type F, subform Ua, grade A, class II, category 1, white of MIL-I-631, for noise reduction.
5/ Arcoset No. 200, M.M. Reif and Co., Rockledge, PA, or Phillicast No. 2, Philadelphia Resin Corp., Montgomeryville, PA, or equal.
6/ Cap material shall be Ni-Al-BRZ, QQ-C-465 for use with item 17.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:16Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Unless otherwise indicated, tolerances shall be as follows:

   (a) Decimals - plus or minus 0.005 inch.
   (b) Fractions - plus or minus 1/64 inch.
   (c) Angular dimensions - plus or minus 1/2 degree.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N279-16)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:16Z
Check the source to verify that this is the current version before use.