MIL-C-24231/17D(SH)
15 May 1987
SUPERSEDING
MIL-C-24231/17C(SHIPS)
30 August 1976
(See note 3)

MILITARY SPECIFICATION SHEET


CONNECTOR, ADAPTER FOR MOLDED PLUG, TYPE II, NINE-CONDUCTOR

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the adapter described herein shall consist of this specification and the latest issue of MIL-C-24231.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:16Z
Check the source to verify that this is the current version before use.

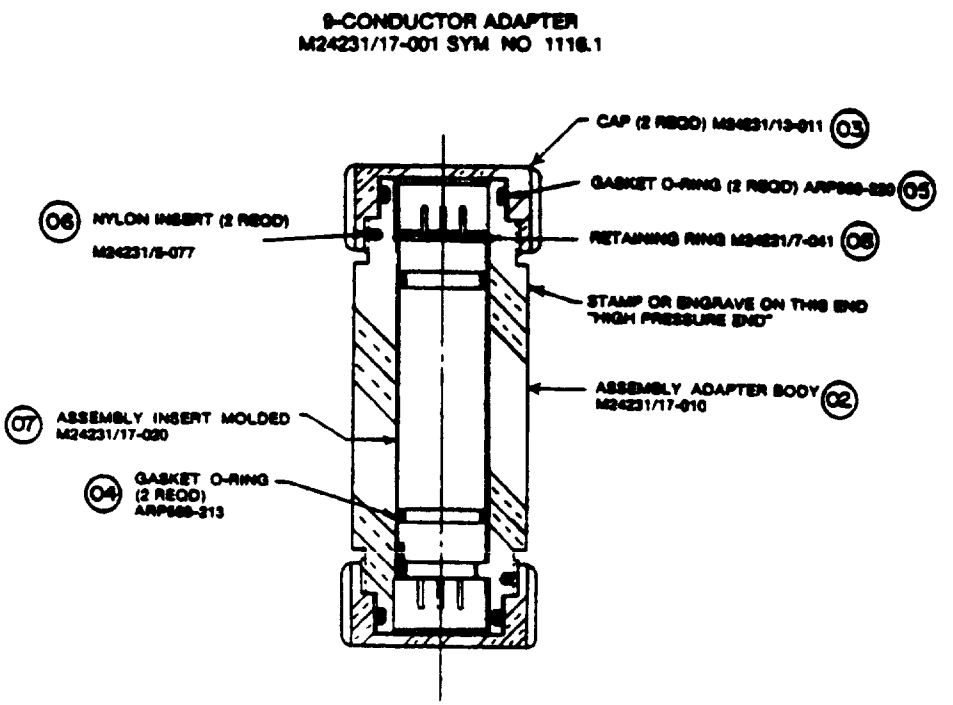

SH 9684


FIGURE 1. Connector, adapter. (01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:16Z
Check the source to verify that this is the current version before use.

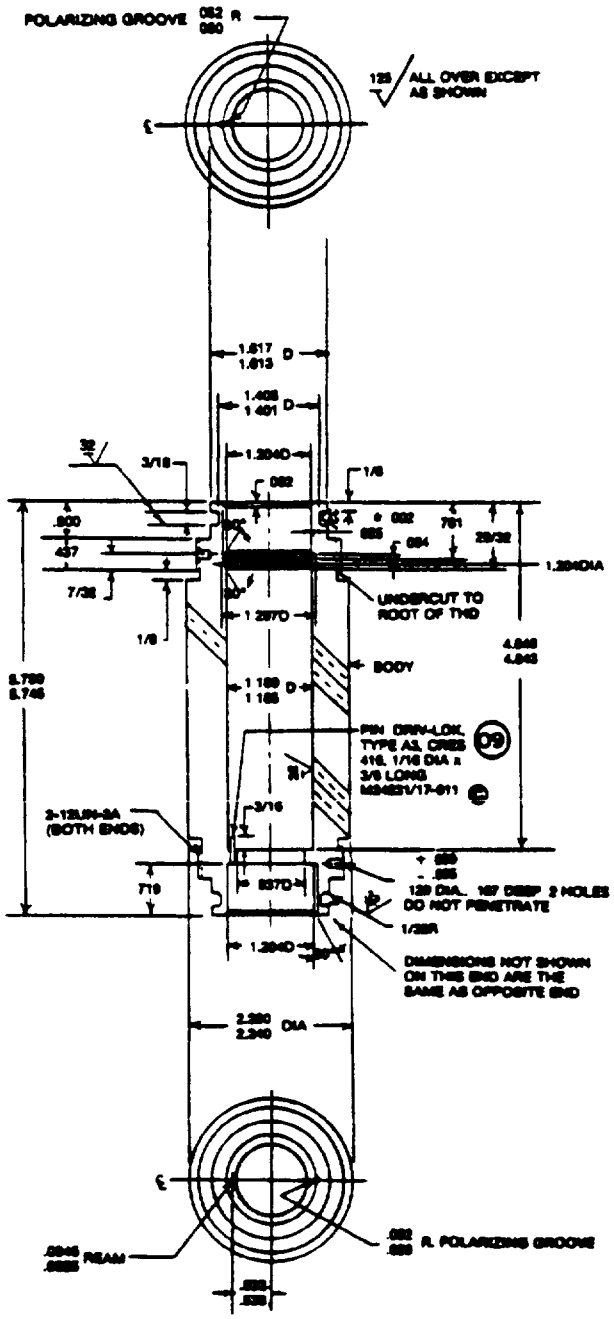

02

FIGURE 2. Assembly, adapter body - M24231/17-010.

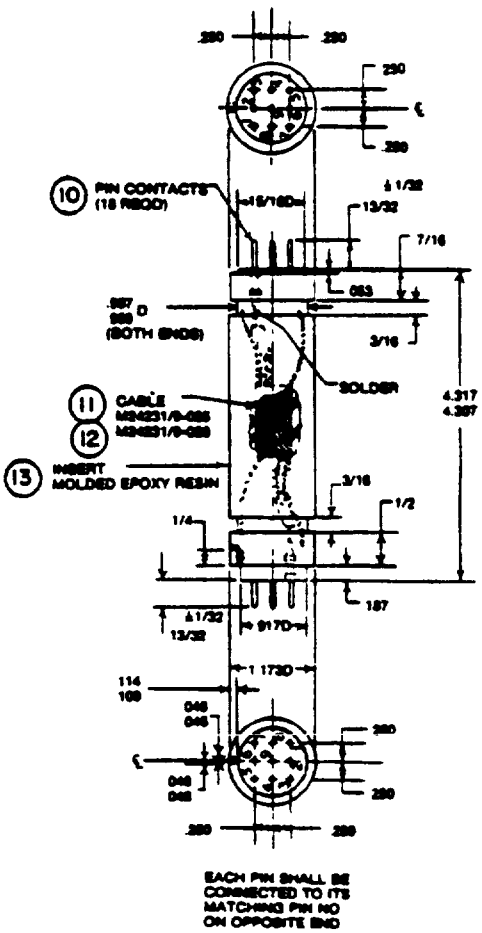

07

FIGURE 3. Assembly, insert, molded - M24231/17-020.

SH 9684-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:16Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figures.
2. Material for adapter body shall be manufactured from nickel-copper alloy in accordance with class A, form 1, hot finished condition of QQ-N-281 with a minimum yield strength of 40,000 lbf/in^2 at 0.2 percent offset, or nickel-copper alloy in accordance with class A, form 1, cold drawn condition of QQ-N-281 with a minimum yield strength of 50,000 lbf/in^2 at 0.2 percent offset.
3. RG-264/U cable used for insert shall have the outer jacket removed. Shields and wires shall be soldered to pins as shown in the appendix of MIL-C-24231.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:16Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item 1/ no.	Description 2/	Quantity for M24231/17- 3/ 001	Material/specification	Remarks
01	Connector, adapter, 9-conductor, symbol no. 1116.1	1	-----	See figure 1
02	Body, adapter	1	Ni-Cu, class A, QQ-N-281	See figure 2 and requirement 2
03	Cap, pressure-proof	2	M24231/13-011	See figure 1
04	Gasket, O-ring	2	MS28775-213	Lubricate with silicone compound MIL-S-8660; see figure 1
05	Gasket, O-ring	2	MS28775-220	See item 04
06	Insert	2	Nylon, M24231/5-077	See figure 1
07	Insert assembly, molded	1	See items 10 and 11, or 12 and 13	See figure 3
08	Ring, retaining	1	M24231/7-041	See figure 1
09	Pin, driv-loc, 1/16 diameter by 3/8 long	1	Type A3, CRES 416, coml	See figure 2
10	Pin, contact	18	MIL-C-24231	See figure 3
11	Cable, RG-264 C/U	As required	M24231/9-026	See figure 3 and requirement 3
12	Cable, RG-264 A/U	As required	M24231/9-025	See figure 3 and requirement 3
13	Epoxy resin, molded	As required	Cast epoxy resin compound 4/	

See footnotes at top of next page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:16Z
Check the source to verify that this is the current version before use.

1/ Item numbers are the same as encircled numbers shown on figures.
2/ See applicable figure or table listed in remarks column for part numbers and dimensions.
3/ Quantity is for one complete assembly of each size.
4/ Arcoset No. 200, M.M. Reif and Co., Rockledge, PA, or Phillicast No. 2, Philadelphia Resin Corp., Montgomeryville, PA, or equal.

NOTES:

1. All dimensions are in inches.
2. Unless otherwise indicated, tolerances shall be as follows:

   (a) Decimals - plus or minus 0.005 inch.
   (b) Fractions - plus or minus 1/64 inch.
   (c) Angular dimensions - plus or minus 1/2 degree.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N279-17)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:16Z
Check the source to verify that this is the current version before use.