MIL-C-24231/18D(SH)
15 May 1987
SUPERSEDING
MIL-C-24231/18C(SHIPS)
30 August 1976
(See note 4)

MILITARY SPECIFICATION SHEET


CONNECTOR, PLUG, TYPE I, MOLDED, 65-CONDUCTOR

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the plug described herein shall consist of this specification and the latest issue of MIL-C-24231.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:16Z
Check the source to verify that this is the current version before use.

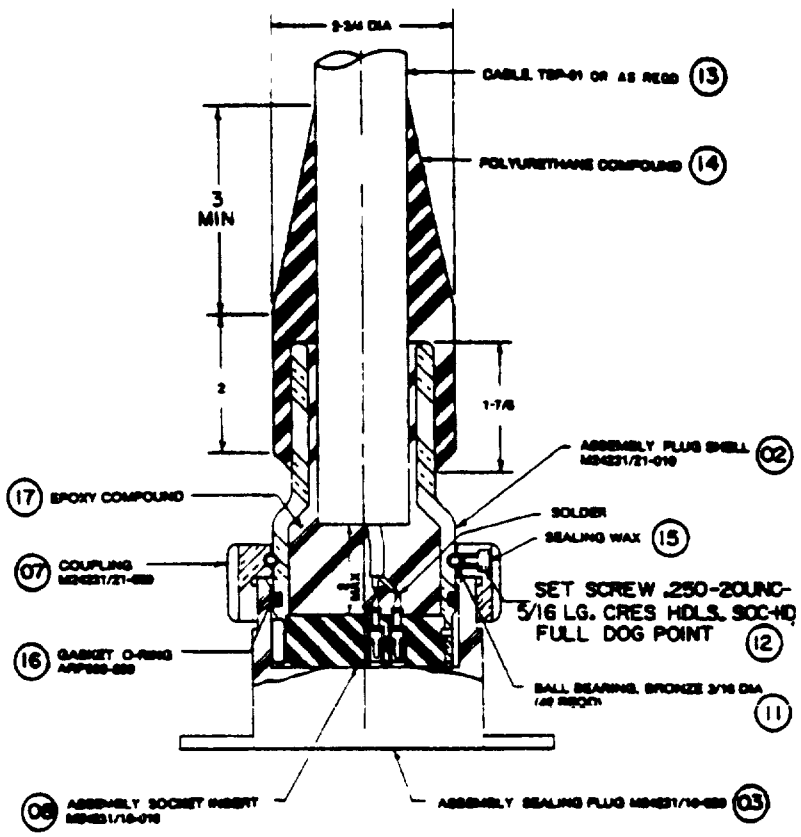

SH 9685

FIGURE 1. Connector, plug, 65-conductor. (01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:16Z
Check the source to verify that this is the current version before use.

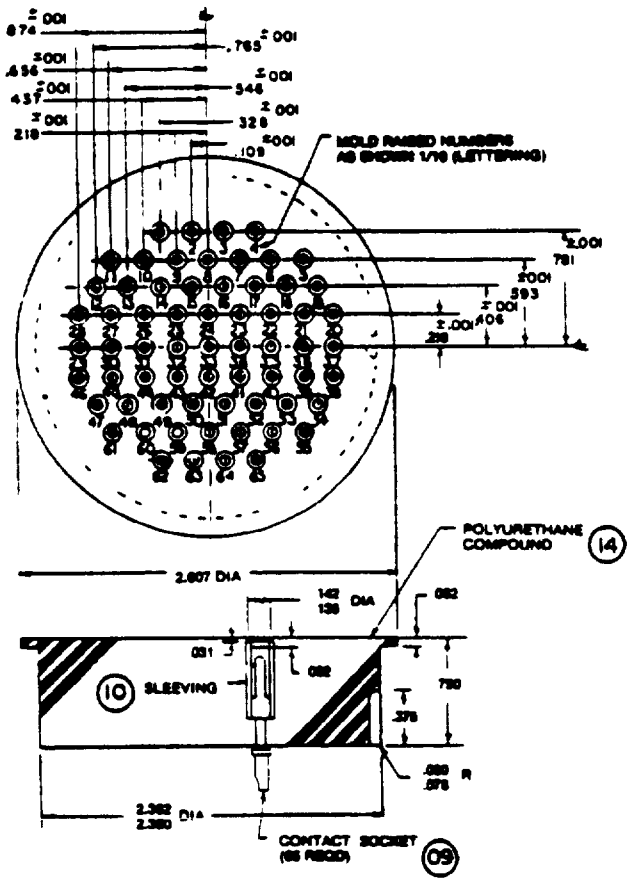


FIGURE 2. Assembly, socket insert - M24231/18-010. (08)

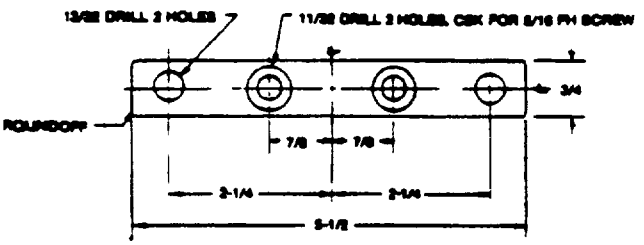


FIGURE 3. Handle, 3/16 inch thick. (04)

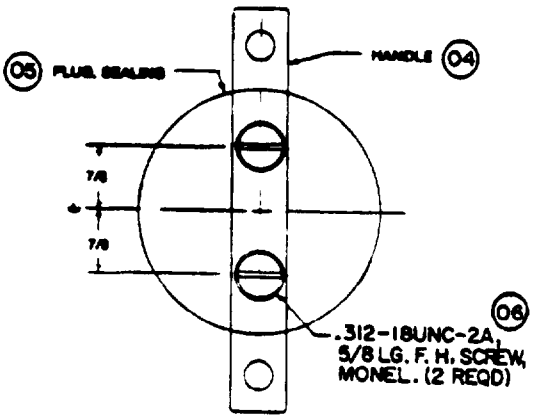


FIGURE 4. Assembly, sealing plug - M24231/18-020.

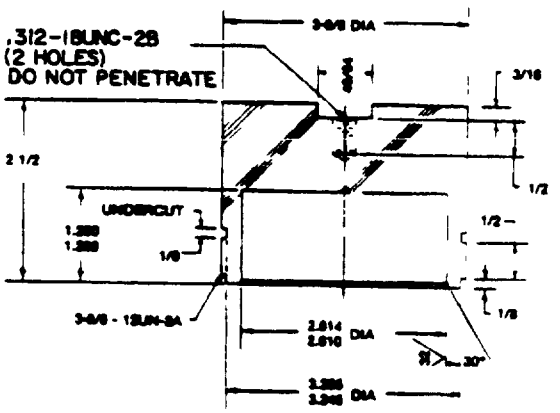


FIGURE 5. Plug, sealing. (05)

SH 9685-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:16Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figure.
2. The sealing plug assembly is designed to seal off the plug against hydrostatic pressure as high as 2000 pounds per square inch and shall remain in place until assembly of the plug with the receptacle.
3. Connections of wires in cable TSP-31 to sockets shall be made in accordance with the applicable table in the appendix of MIL-C-24231.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:16Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item 1/ no.	Description 2/	Quantity for M24231/18- 3/ 001	Material/specification	Remarks
01	Plug, 65-conductor, symbol no. 1139	1	-----	See figure 1
02	Shell, plug	1	M24231/21-010	See figure 1
03	Sealing plug assembly	1	See items 4, 5, and 6	See figure 4 and requirement 2
04	Handle, 3/16 thick	1	Phosphor bronze, hard, coml	See figure 3
05	Sealing plug	1	Type II, grade GV of L-P-1036	See figure 4
06	Screw, F.H. 0.312-18 UNC-2A, 5/8 long	2	Ni-Cu, class A, QQ-N-281	See figure 4
07	Coupling	1	M24231/21-030	See figure 1
08	Insert, assembly, socket	1	See items 9, 10 and 14	See figure 2
09	Contact, socket	65	MIL-C-24231	See requirement 3
10	Sleeving, socket no. 9, 0.118 id by 9/16 long	65	Type F, form Ua grade a class II, category 1, clear, MIL-I-631	See figure 2
11	Ball bearing, 3/16 inch diameter	42	Bronze, MIL-B-1083	See figure 1

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:16Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list. - Continued

Item 1/ no.	Description 2/	Quantity for M24231/18- 3/ 001	Material/specification	Remarks
12	Screw, set, 1/4-20 by 5/16 long handles, soc-hd, full dog point	1	CRES, coml	See figure 1
13	Cable, TSP-31	As required	MIL-C-915/22	See figure 1
14	Compound, polyurethane	As required	Type I, category A MIL-M-24041	See figure 1
15	Wax, sealing	As required	Coml	See figure 1
16	Gasket, O-ring	1	MS28775-230	Lubricate with silicone compound, MIL-S-8660
17	Epoxy compound	As required	Cast epoxy-resin compound 4/	See figure 1

1/ Item numbers are the same as encircled numbers shown on figures.
2/ See applicable figure or table listed in remarks column for part numbers and dimensions.
3/ Quantity is for one complete assembly of each size.
4/ Arcoset No. 200, M.M. Reif and Co., Rockledge, PA, or Phillicast No. 2, Philadelphia Resin Corp., Montgomeryville, PA, or equal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:16Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Unless otherwise indicated, tolerances shall be as follows:

   (a) Decimals - plus or minus 0.005 inch.
   (b) Fractions - plus or minus 1/64 inch.
   (c) Angular dimensions - plus or minus 1/2 degree.

3. These connectors are for maintenance purposes only.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N279-18)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:16Z
Check the source to verify that this is the current version before use.