
MILITARY SPECIFICATION SHEET

CONNECTOR, SINGLE CABLE, 65-CONDUCTOR

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of MIL-C-24231(SHIPS).

ASSEMBLY, SINGLE CABLE CONNECTOR
M24231/19-001 SYM. NO. 1138

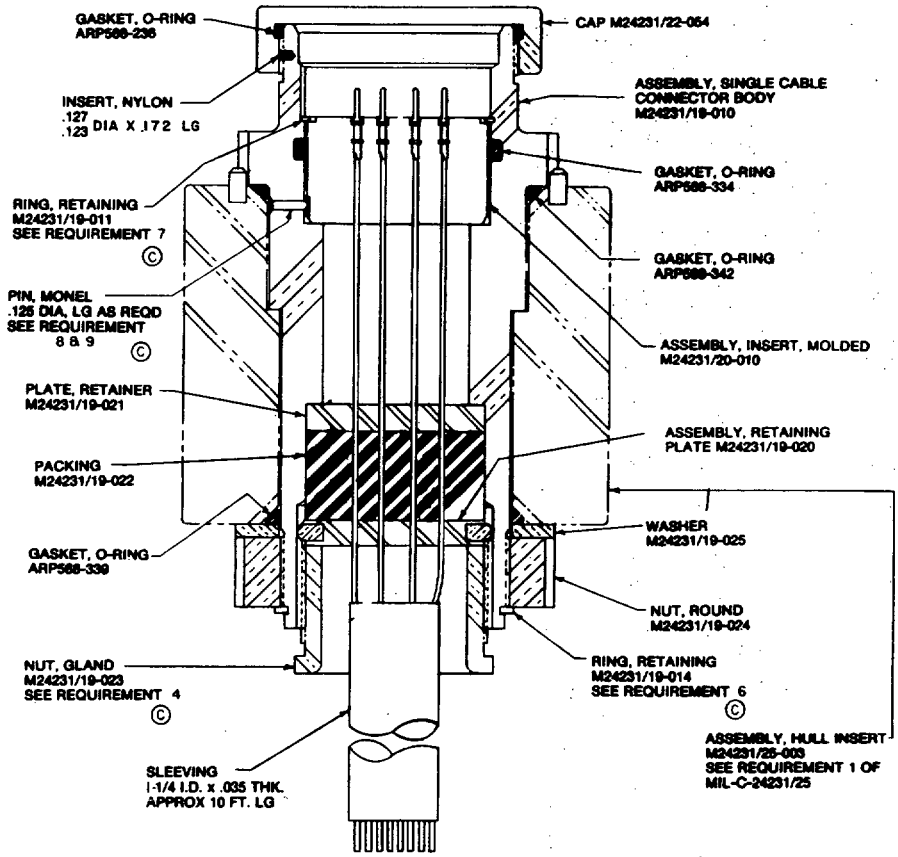


ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±1/64 INCH FOR FRACTIONS AND ±0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE IS ±1/2 DEGREE.

SH9686

Denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:17Z
Check the source to verify that this is the current version before use.

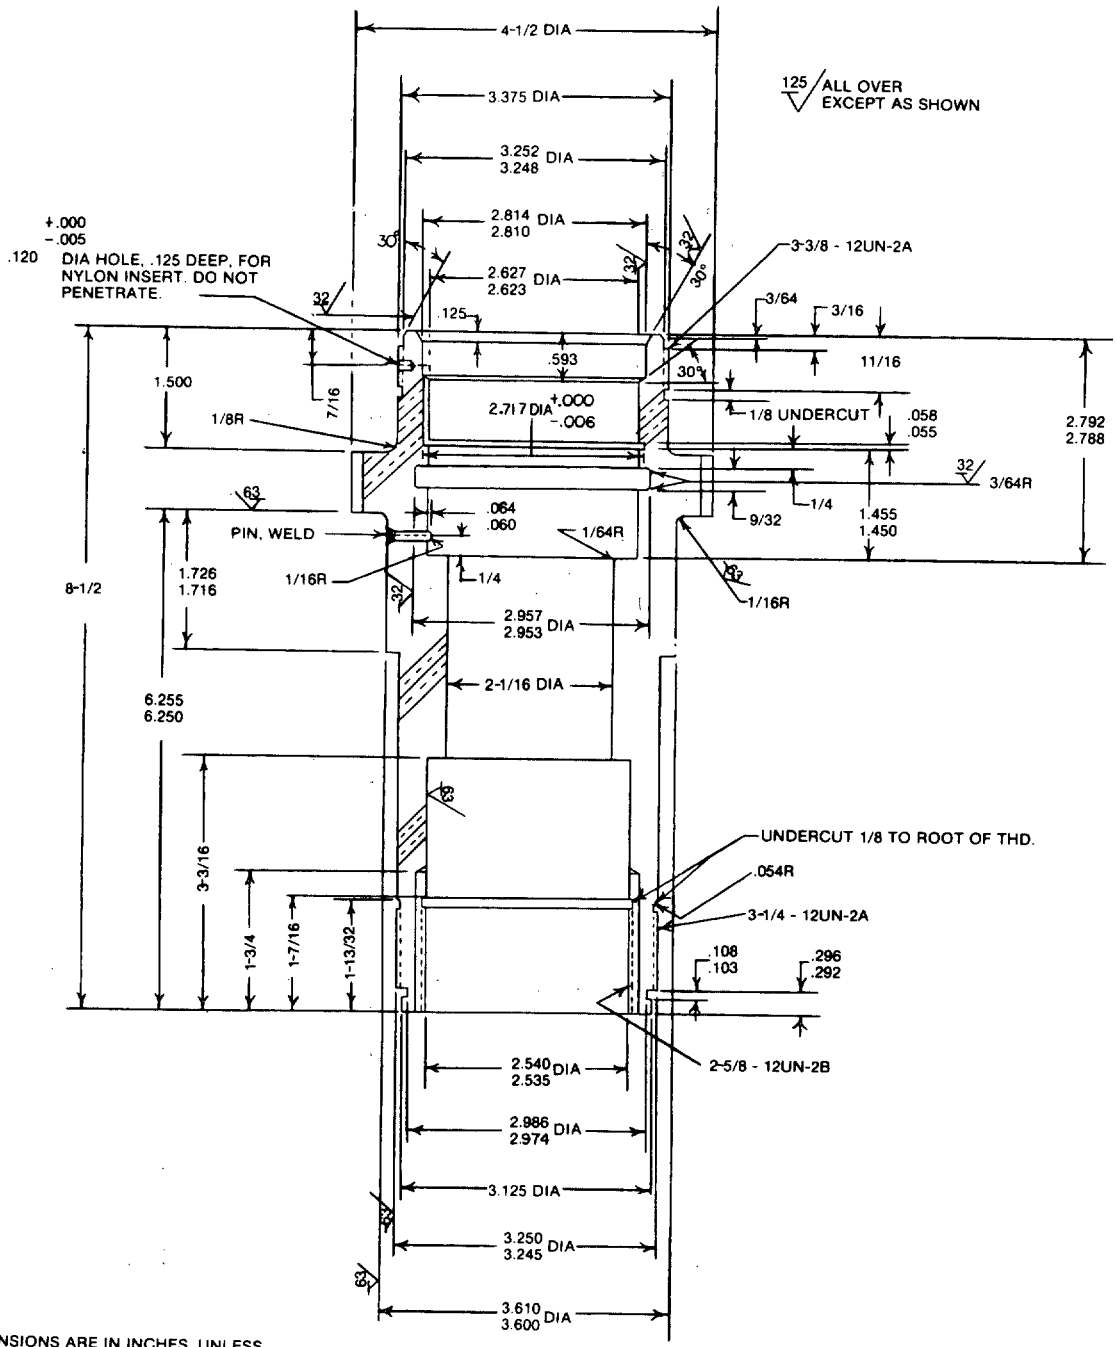


ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±1/64 INCH FOR FRACTIONS AND ±0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE IS ±1/2 DEGREE.

ASSEMBLY, SINGLE CABLE CONNECTOR BODY
M24231/19-010

SH9686-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:17Z
Check the source to verify that this is the current version before use.

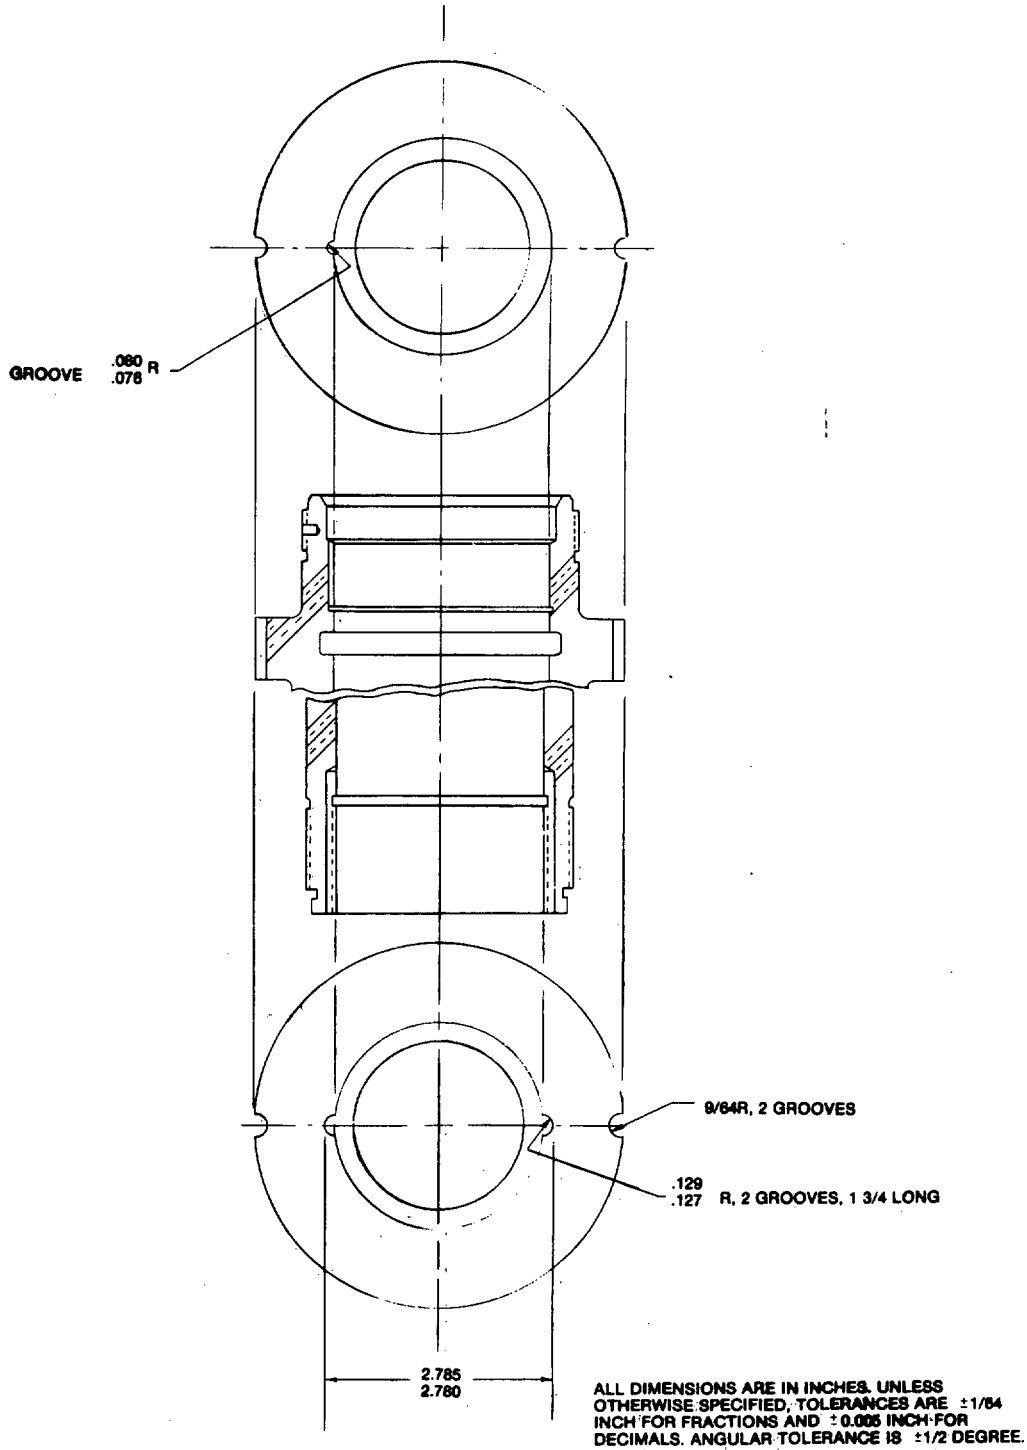


ASSEMBLY, SINGLE CABLE CONNECTOR BODY
M24231/19-010

SH9686-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:17Z
Check the source to verify that this is the current version before use.

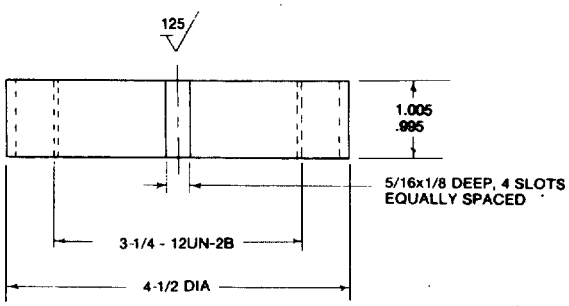


NUT, ROUND
M24231/19-024

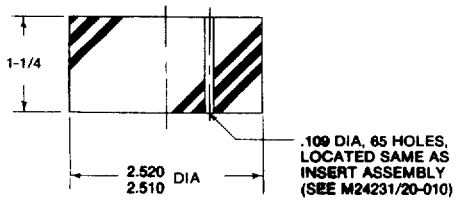


PACKING
M24231/19-022

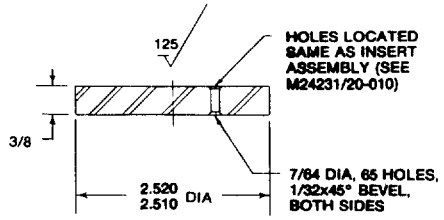

PLATE, RETAINER
M24231/19-021

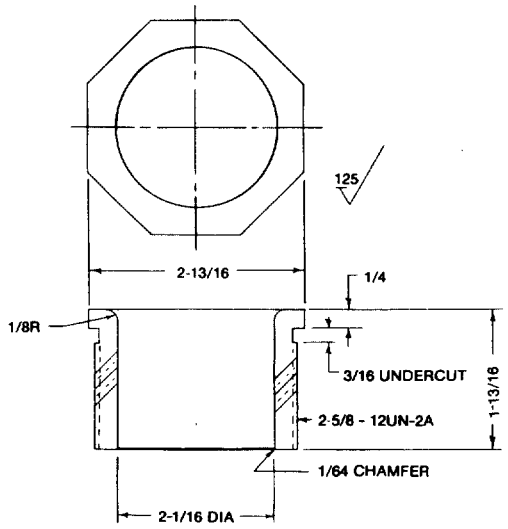

NUT, GLAND
M24231/19-023

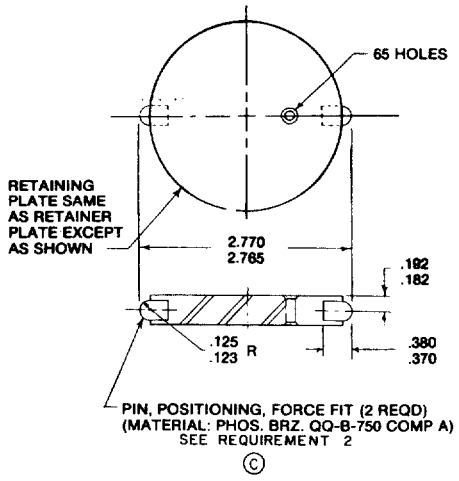

ASSEMBLY, RETAINING PLATE
M24231/19-020

ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±1/64 INCH FOR FRACTIONS AND ±0.005 FOR DECIMALS. ANGULAR TOLERANCE IS ±1/2 DEGREE.

SH9686-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:17Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configurations: See figures.
2. Material for the positioning pin shall be phosphor-bronze, composition A of QQ-B-750.
3. Material for the nut and washer shall be K-monel, class A of QQ-N-286.
4. The gland nut shall be tightened until the packing tightens against the wires. This can be determined by moving the wires gently back and forth until the wire is seized by the packing. The gland nut shall be turned approximately one fourth of a turn more to hold the wires in place. DO NOT OVERTIGHTEN the gland nut or attempt to tighten down metal to metal, as this can damage the wires.
5. Dimensions for washer, part number M24231/19-025 shall be 4-1/2 inches O.D. by 3.260 inches I.D. by 0.187 inch thick.
6. (C) Retaining ring, part number M24231/19-014, shall be SPIROLOX Ring part number RST-312S mfd by Ramsey Corp., St. Louis, MO.
7. (C) Retaining ring part number M24231/19-011 shall be SPIROLOX Ring part number RR-262 mfd by Ramsey Corp., St. Louis, MO.
8. (C) Refer to requirement 9 of MIL-C-24231/5 for alternate method of manufacturing connector body and installing guide pin M24231/5-071.
9. (C) Welding of the pin is allowed after the hull fitting body has been age-hardened to achieve its required physical properties. This gives the manufacturing activity the option to make the body, nut and washer from any age-hardened ni-cu-al alloy in accordance with class A of QQ-N-286 that will meet the mechanical properties listed in paragraph 3.3.2 of MIL-C-24231. In that case, the chemical and physical certification obtained from the supplier of the ni-cu-al alloy will satisfy certification requirements when supplemented, by the required traceability markings identifying the finished product to the bar stock on which the chemical and physical analysis was performed.

Preparing activity:
Navy - SH
(Project 5935-N842-19)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:17Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:17Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Ship Engineering Center
Center Building-Sec 61247
Prince George's Center
Hyattsville, MD 20782

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:17Z
Check the source to verify that this is the current version before use.