MIL-C-24231/19D(SH)
15 May 1987
SUPERSEDING
MIL-C-24231/19C(SHIPS)
30 August 1976
(See note 4)

MILITARY SPECIFICATION SHEET


CONNECTOR, SINGLE CABLE, TYPE III, 65-CONDUCTOR

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-C-24231.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:17Z
Check the source to verify that this is the current version before use.

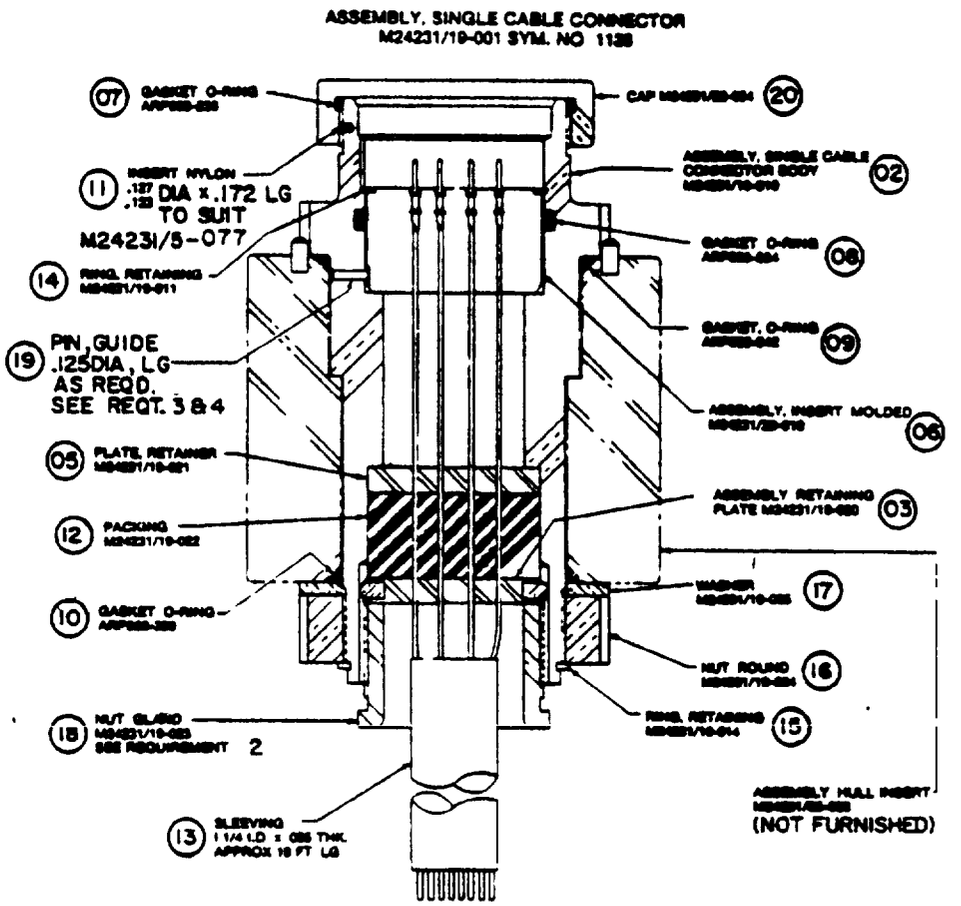

SH 9686

FIGURE 1. Connector, single cable. (01)


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:17Z
Check the source to verify that this is the current version before use.

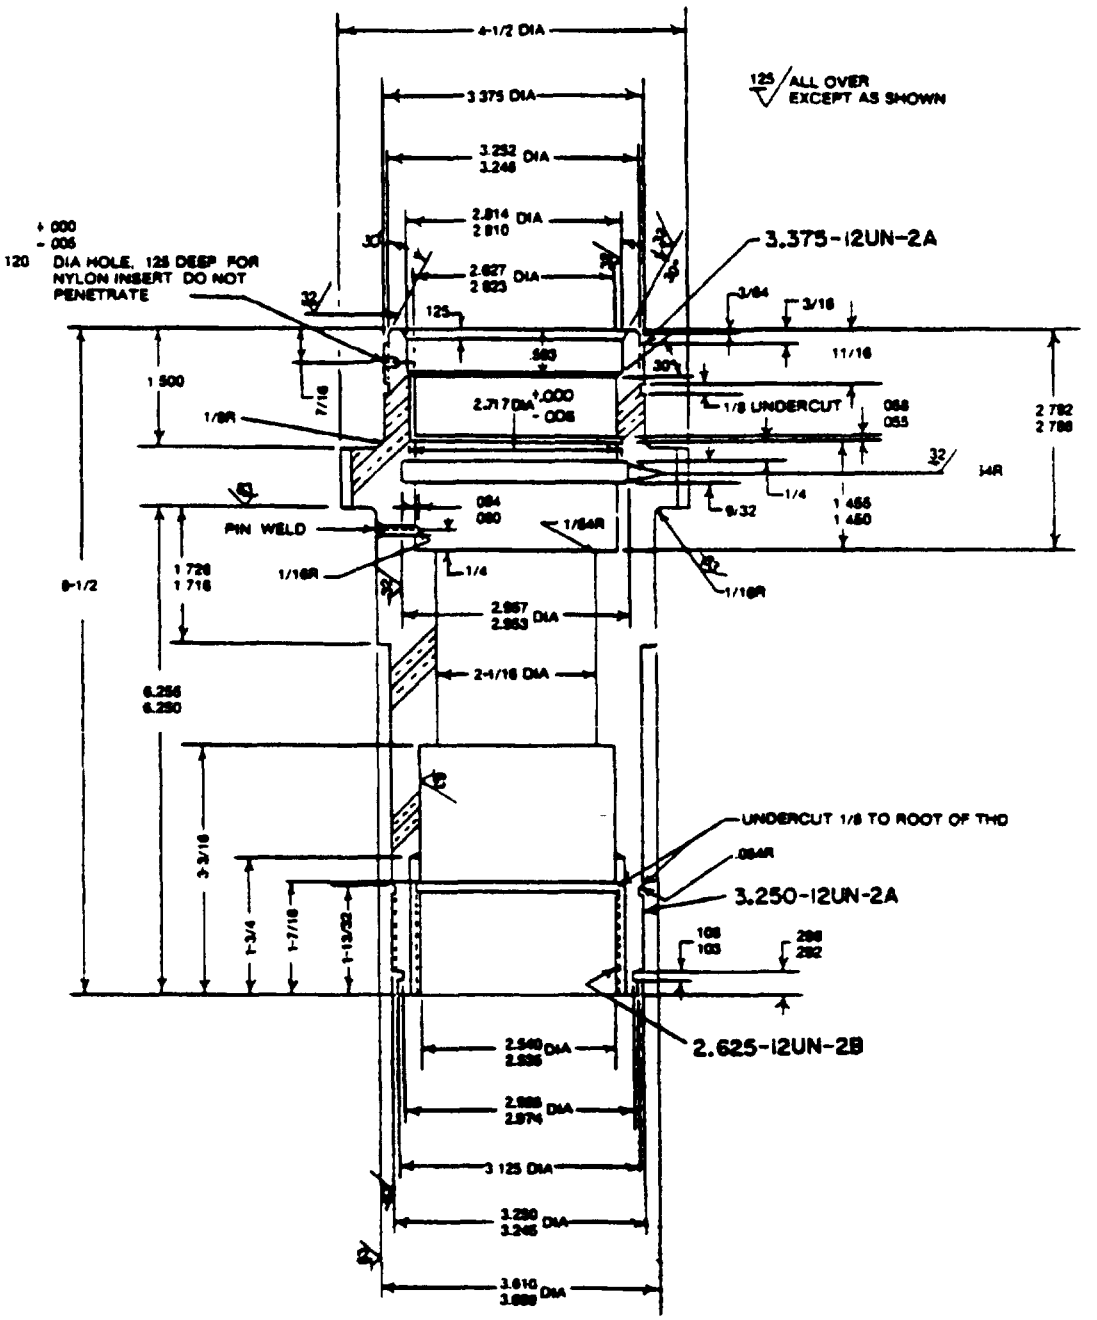

SH 9686-1

FIGURE 2. Assembly, single cable connector body - M24231/19-010. (02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:17Z
Check the source to verify that this is the current version before use.

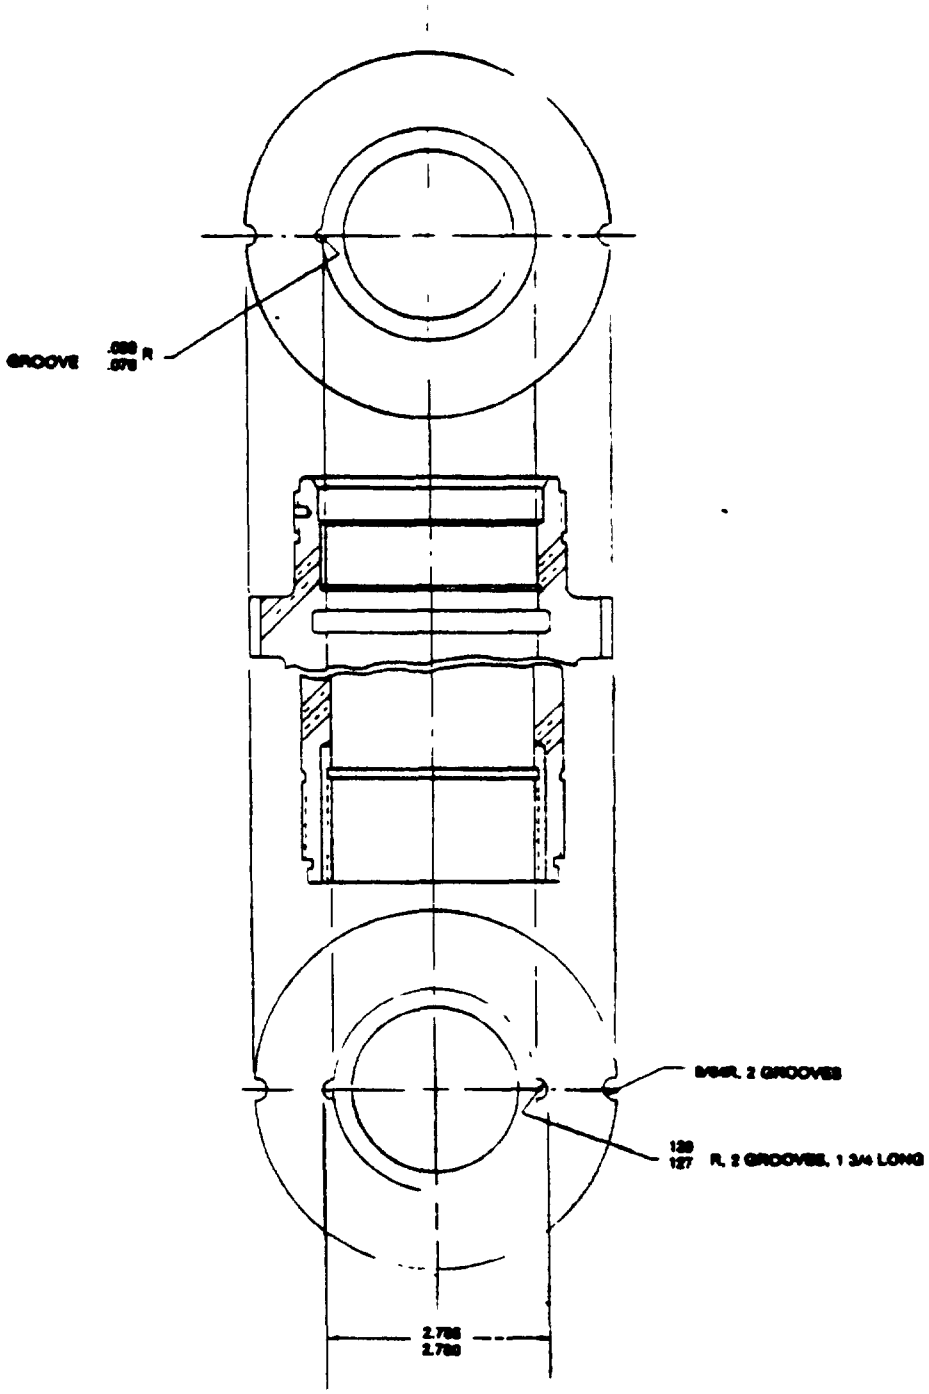

SH 9686-2

FIGURE 2. Assembly, single cable connector body - M24231/19-010. - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:17Z
Check the source to verify that this is the current version before use.

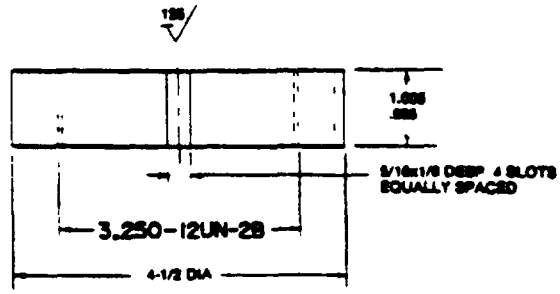


FIGURE 3. Nut, round - M24231/19-024. (16)

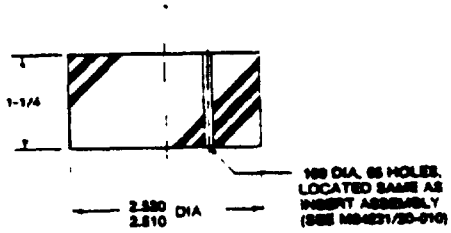


FIGURE 4. Packing - M24231/19-022. (12)

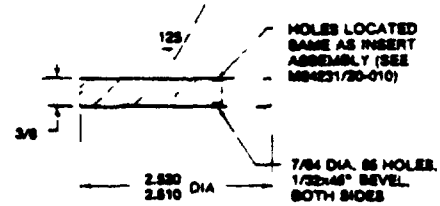


FIGURE 6. Plate, retainer - M24231/19-021. (05)


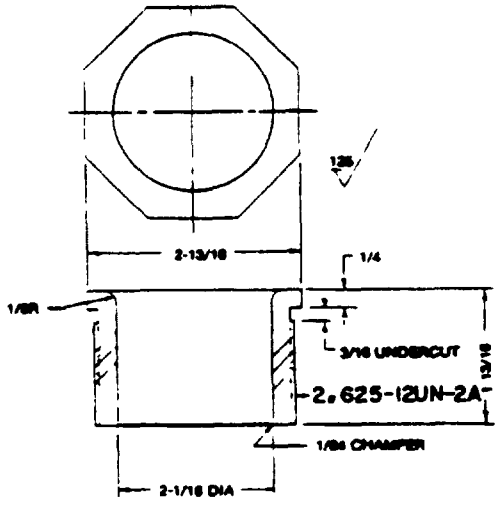


FIGURE 5. Nut, gland - M24231/19-023. (18)

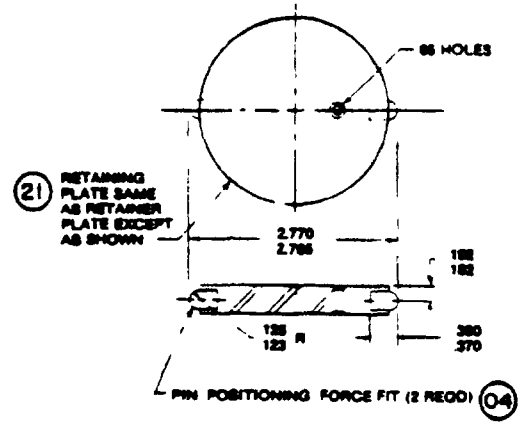

(03)

FIGURE 7. Assembly, retaining plate - M24231/19-020.

SH 9686-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:17Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figures.
2. The gland nut shall be tightened until the packing tightens against the wires. This can be determined by moving the wires gently back and forth until the wire is seized by the packing. The gland nut shall be turned approximately one fourth of a turn more to hold the wires in place. Do not overtighten the gland nut or attempt to tighten down metal to metal, as this can damage the wires.
3. Refer to requirement 4 of MIL-C-24231/5 for alternate method of manufacturing connector body and installing guide pin M24231/5-071.
4. Welding of the pin is allowed after the hull fitting body has been age-hardened to achieve its required physical properties.
5. The retainer plates and retainer plate assemblies shall be manufactured from nickel-copper alloy in accordance with class A, form 1, hot finished condition of QQ-N-281 with a minimum yield strength of 40,000 lbf/in^2 at 0.2 percent offset, or nickel-copper alloy in accordance with class A, form 1, cold drawn condition of QQ-N-281 with a minimum yield strength of 50,000 lbf/in^2 at 0.2 percent offset.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:17Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item 1/ no.	Description 2/	Quantity for M24231/19- 3/ 001	Material/specification	Remarks
01	Connector, single cable, symbol no. 1138	1	-----	See figure 1
02	Connector body, single cable	1	Ni-Cu-Al, QQ-N-286	See figure 2
03	Retaining plate assembly	1	See items 04, and 21	See figure 7 and requirement 5
04	Pin, positioning	2	Ni-Cu, class A, QQ-N-281	See figure 7
05	Plate, retainer	1	Ni-Cu, class A, QQ-N-281	See figure 6
06	Insert assembly, molded	1	M24231/20-010	See figure 1
07	Gasket, O-ring	1	MS28775-236	Lubricate with silicone compound, MIL-S-8660
08	Gasket, O-ring	1	MS28775-334	See item 07
09	Gasket, O-ring	1	MS28775-342	See item 07
10	Gasket, O-ring	1	MS28775-339	See item 07
11	Insert	1	Nylon, group 1, class 1, ASTM D 4066	See item 07
12	Packing, class A, durometer 55 ± 5	1	Rubber, ZZ-R-768	See figure 4
13	Sleeving, 1-1/4 id by 0.035 thick	10 ft	Type F, form U, category 1, color clear, MIL-I-631	See figure 1

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:17Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list. - Continued

Item 1/ no.	Description 2/	Quantity for M24231/19- 3/ 001	Material/specification	Remarks
14	Ring, retaining M24231/19-011	1	SPIROLOX, RR-262 4/	See figure 1
15	Ring, retaining M24231/19-014	1	SPIROLOX, RST-312S 4/	See figure 1
16	Nut, round	1	Ni-Cu-Al, class A, QQ-N-286	See figure 3
17	Washer, 4-1/2 od by 3.260 id by 0.187 thick	1	See item 16	See figure 1
18	Nut, gland	1	Ni-Al-BRZ, QQ-C-465	See figure 5 and requirement 2
19	Pin, guide, 0.125 diameter, length to suit	1	Ni-Cu, class A, QQ-N-281	See requirements 3 and 4
20	Cap, pressure-proof	1	M24231/22-054	See figure 1
21	Plate, retaining	1	Ni-Cu, class A, QQ-N-281	See figure 7 and requirement 5

1/ Item numbers are the same as encircled numbers shown on figures.
2/ See applicable figure or table listed in remarks column for part numbers and dimensions.
3/ Quantity is for one complete assembly of each size.
4/ Manufactured by Ramsey Corp., St. Louis, MO, or equal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:17Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Unless otherwise indicated, tolerances shall be as follows:

   (a) Decimals - plus or minus 0.005 inch.
   (b) Fractions - plus or minus 1/64 inch.
   (c) Angular dimensions - plus or minus 1/2 degree.

3. These connectors are for maintenance purposes only.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N2 -19)

Source: https://assist.dla.mil -- Downloaded2026-10-19T20:17Z
Check the source to verify that this is the current version before use.