MIL-C-24231/20D(SH)
15 May 1987
SUPERSEDING
MIL-C-24231/20C(SHIPS)
30 August 1976
(See note 4)

MILITARY SPECIFICATION SHEET

CONNECTOR, RECEPTACLE, MULTI-PIN, TYPE V, 65-CONDUCTOR

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the receptacle described herein shall consist of this specification and the latest issue of MIL-C-24231.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:17Z
Check the source to verify that this is the current version before use.

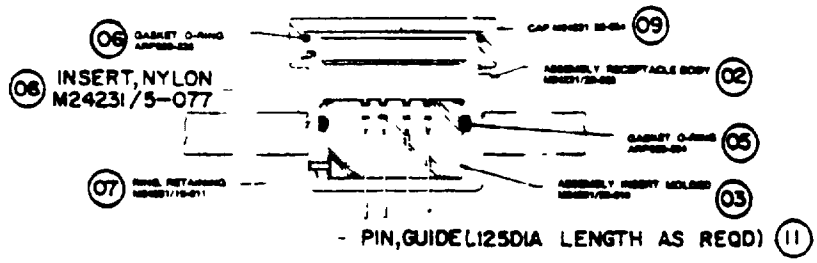


FIGURE 1. Connector, receptacle multi-pin - M24231/20-001 sym no. 1138.1. (01)


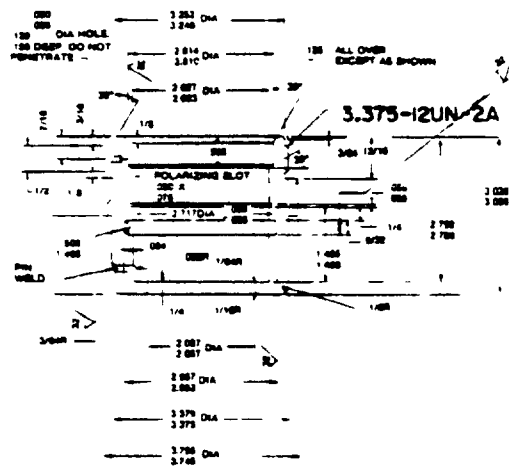


FIGURE 2. Assembly, receptacle body - M24231/20-020. (02)

SH 9687

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:17Z
Check the source to verify that this is the current version before use.

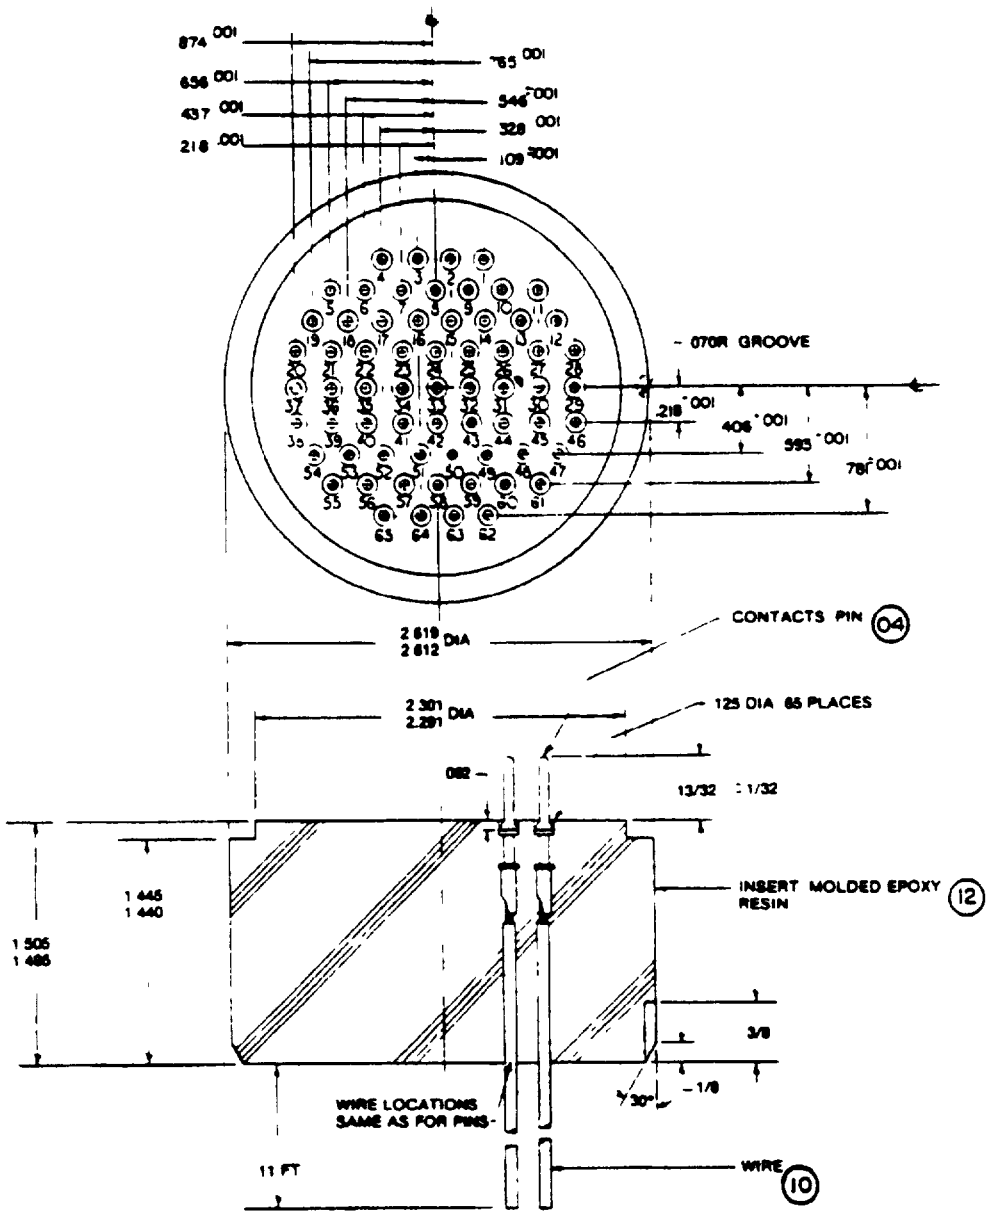

SH 9687-1

FIGURE 3. Assembly, molded insert - M24231/20-010. (03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:17Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figures.
2. Material for receptacle body shall be manufactured from nickel-copper alloy in accordance with class A, form 1, hot finished condition of QQ-N-281 with a minimum yield strength of 40,000 lbf/in^2 at 0.2 percent offset, or nickel-copper alloy in accordance with class A, form 1, cold drawn condition of QQ-N-281 with a minimum yield strength of 50,000 lbf/in^2 at 0.2 percent offset.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:17Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item 1/ no.	Description 2/	Quantity for M24231/20- 3/ 001	Material/specification	Remarks
01	Receptacle, 65-conductor, symbol no. 1138.1	1	-----	See figure 1
02	Body, receptacle	1	Ni-Cu, class A, QQ-N-281	See figure 2
03	Insert assembly, molded	1	Items 04, 10, and 12	See figure 3
04	Pin, contact	65	MIL-C-24231	See figure 3
05	Gasket, O-ring	1	MS28775-334	Lubricate with silicone compound MIL-S-8660, see figure 1
06	Gasket, O-ring	1	MS28775-236	Same as item 05
07	Ring, retaining	1	M24231/19-011	See figure 1
08	Insert	1	M24231/5-077	See figure 1
09	Cap, pressure-proof	1	M24231/22-054	See figure 1
10	Wire	As required	Type B-16, MIL-W-16878/1	See figure 3
11	Pin guide, 0.125 diameter, length as required	1	Ni-Cu, class A, QQ-N-281	See figure 1
12	Epoxy resin, molded	As required	Cast epoxy resin compound 4/	See figure 3

See footnotes at top of next page.

Source: https://assist.dla.mil - Downloaded: 2026-10-19T20:17Z
Check the source to verify that this is the current version before use.

1/ Item numbers are the same as encircled numbers shown on figures.
2/ See applicable figure or table listed in remarks column for part numbers and dimensions.
3/ Quantity is for one complete assembly of each size.
4/ Arcoset No. 200, M.M. Reif and Co., Rockledge, PA, or Phillicast No. 2, Philadelphia Resin Corp., Montgomeryville, PA, or equal.

NOTES:

1. All dimensions are in inches.
2. Unless otherwise indicated, tolerances shall be as follows:

   (a) Decimals - plus or minus 0.005 inch.
   (b) Fractions - plus or minus 1/64 inch.
   (c) Angular dimensions - plus or minus 1/2 degree.

3. These connectors are for maintenance purposes only.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N279-20)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:17Z
Check the source to verify that this is the current version before use.