MIL-C-24231/22C(SHIPS)
30 August 1976
SUPERSEDING
MIL-C-24231/22B(SHIPS)
15 January 1970


MILITARY SPECIFICATION SHEET

CONNECTOR, RECEPTACLE, 80-CONDUCTOR

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department Defense.

The complete requirements for procuring the receptacle described herein shall consist of this document and the latest issue of MIL-C-24231(SHIPS).

ASSEMBLY, RECEPTACLE (2.125 BASE)
M24231/22-001 SYM. NO. 1117
ASSEMBLY, RECEPTACLE (3.875 BASE)
M24231/22-002 SYM. NO. 1117.1

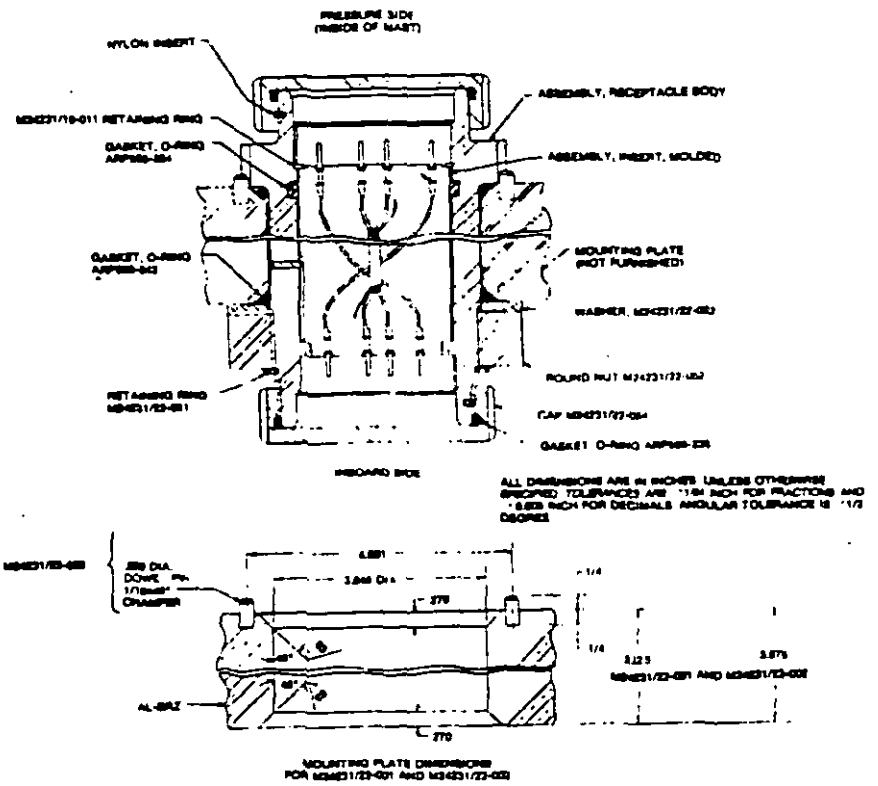

(C) Denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.


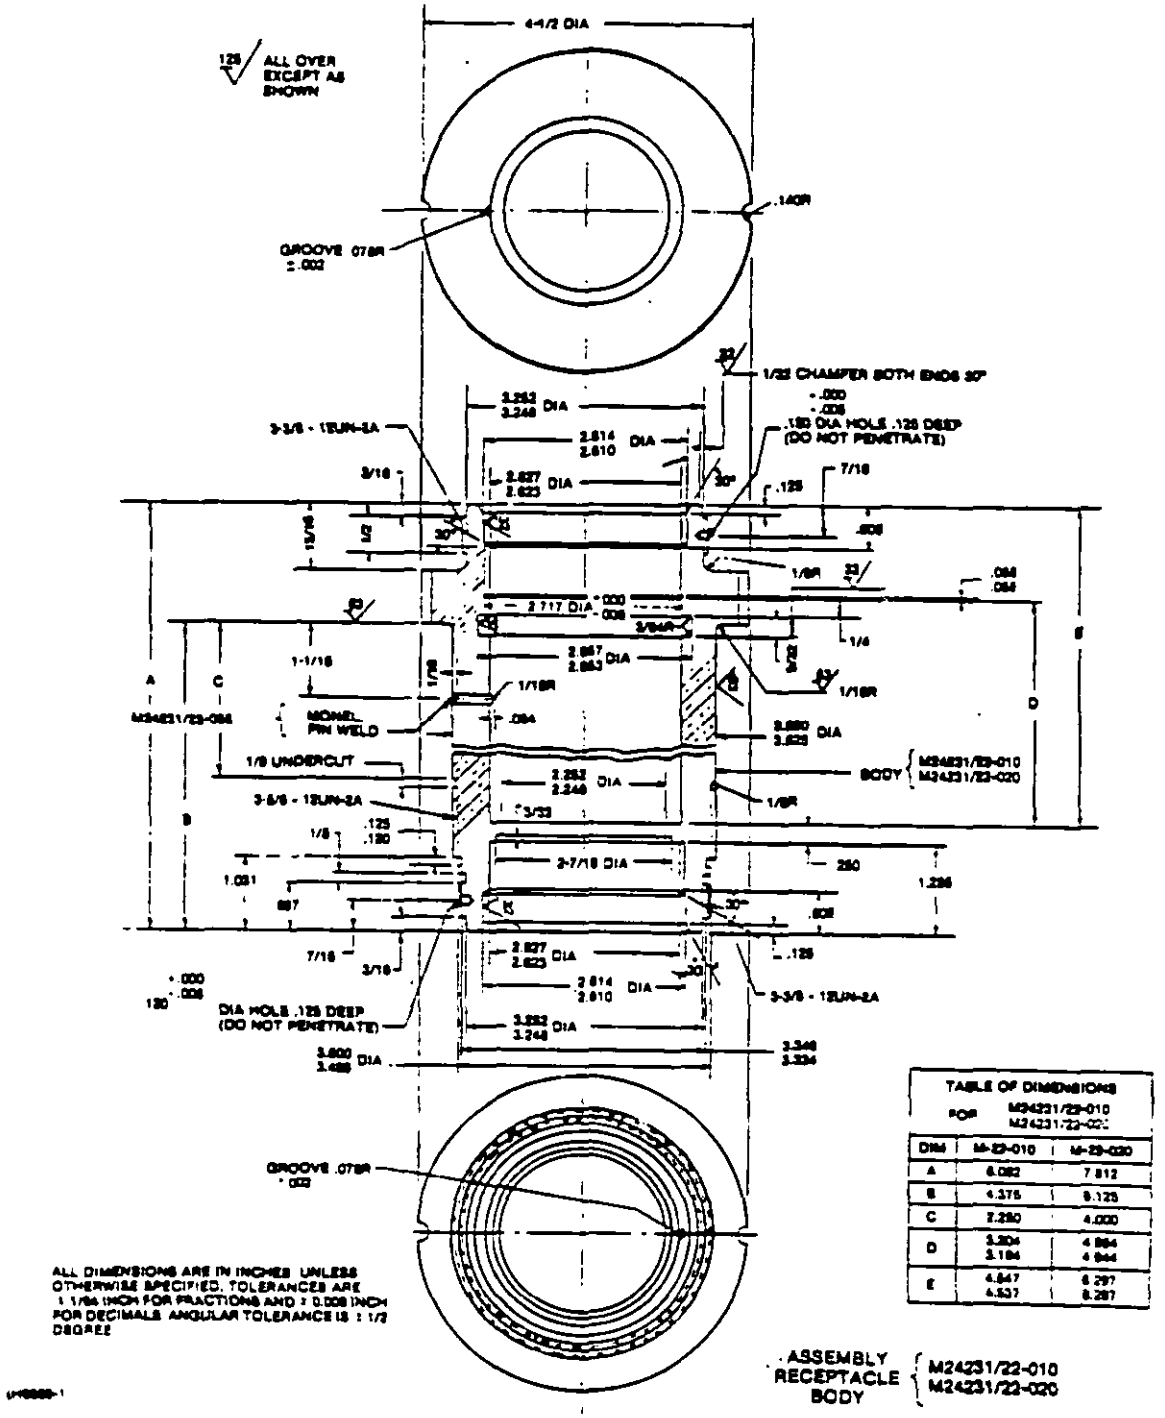


TABLE OF DIMENSIONS
FOR M24231/22-010 M24231/22-020

DIM	M-22-010	M-22-020
A	6.062	7.812
B	4.375	5.125
C	2.250	4.000
D	3.304 3.184	4.984 4.944
E	4.647 4.537	6.297 6.287

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

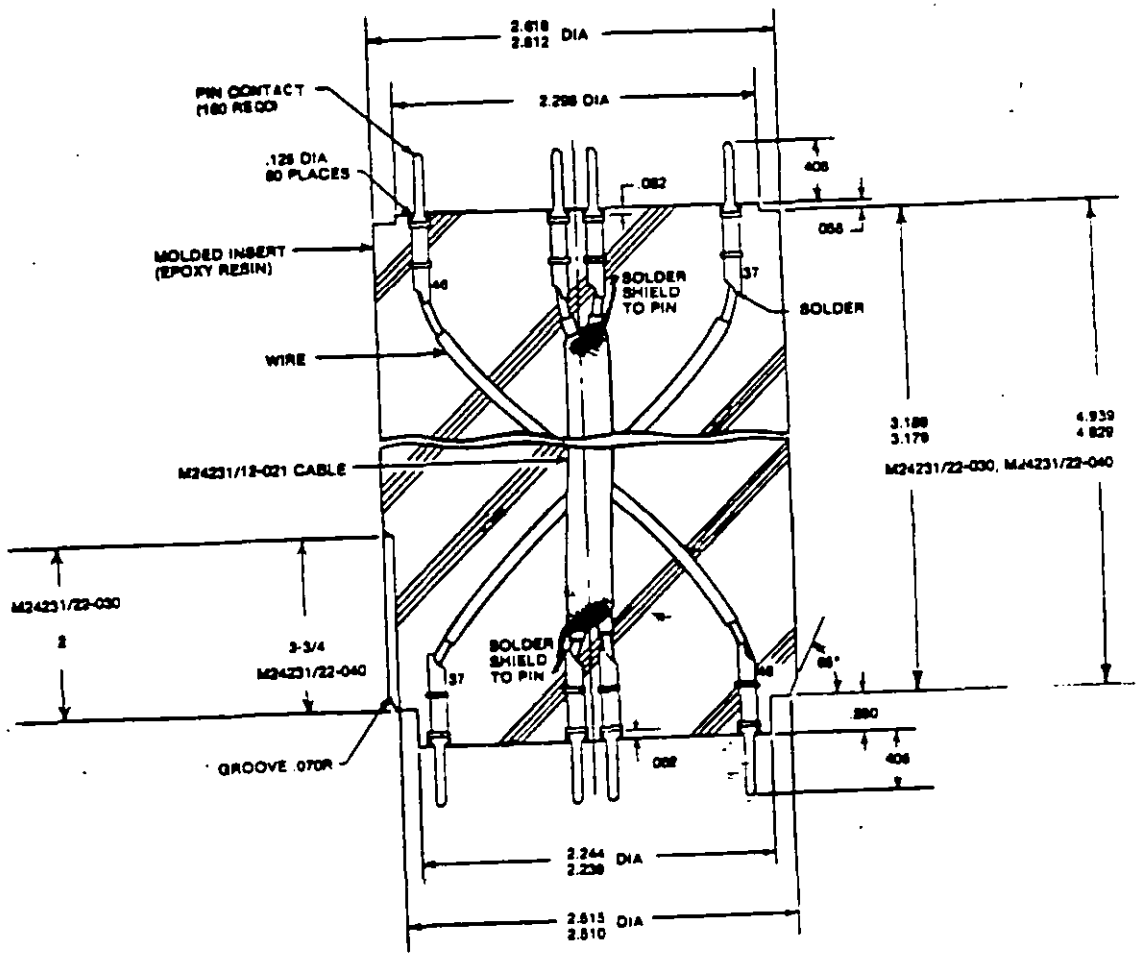


ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± 1/64 INCH FOR FRACTIONS AND ±0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE IS ±1/2 DEGREE.

ASSEMBLY, INSERT, MOLDED
M24231/22-030 M24231/22-040

BH19599-7


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

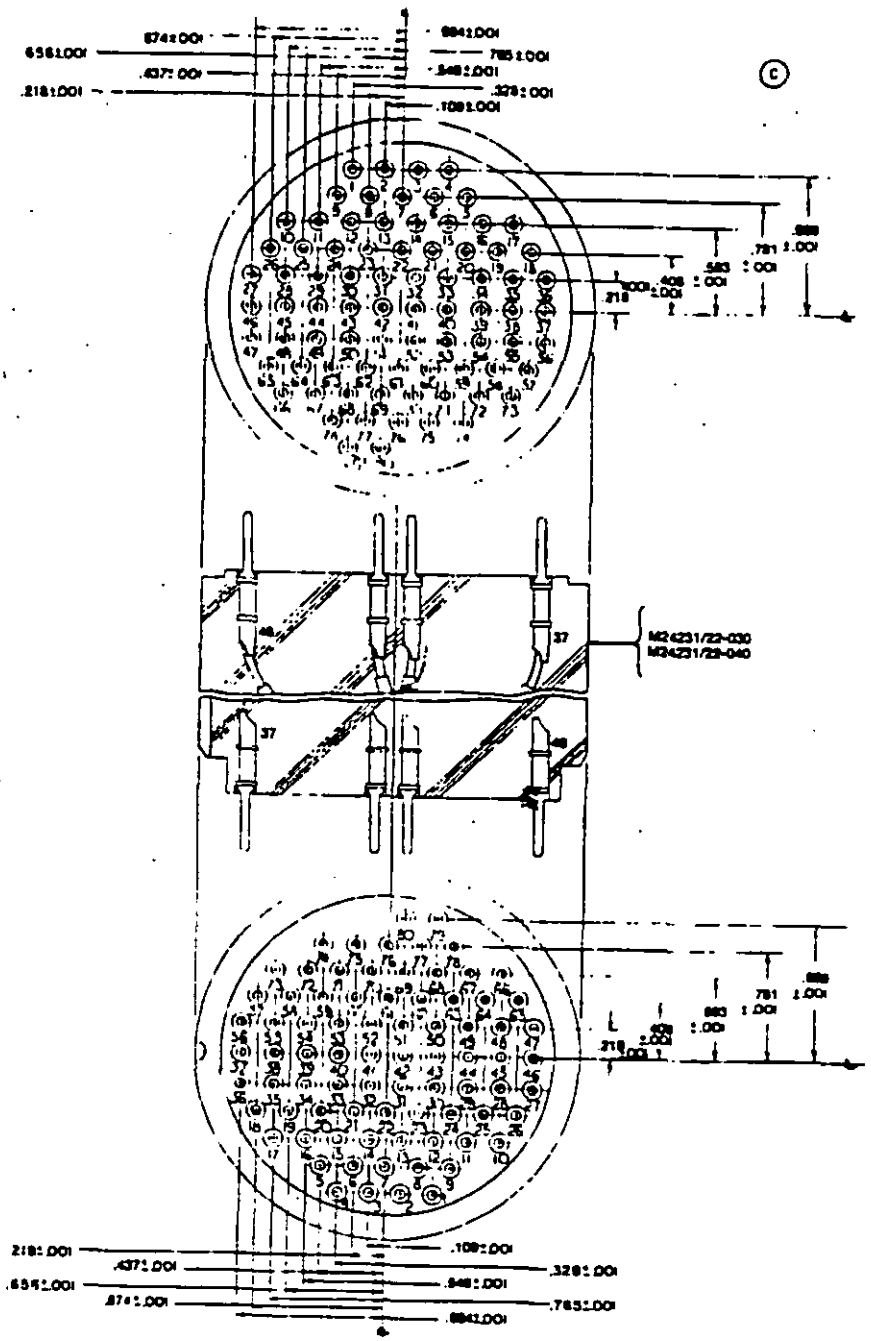


INSERT, PIN CONTACT LAYOUT

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED. TOLERANCES ARE ±1/64 INCH FOR FRACTIONS AND ±0.005 INCH FOR DECIMALS ANGULAR TOLERANCE IS ±1/2 DEGREE

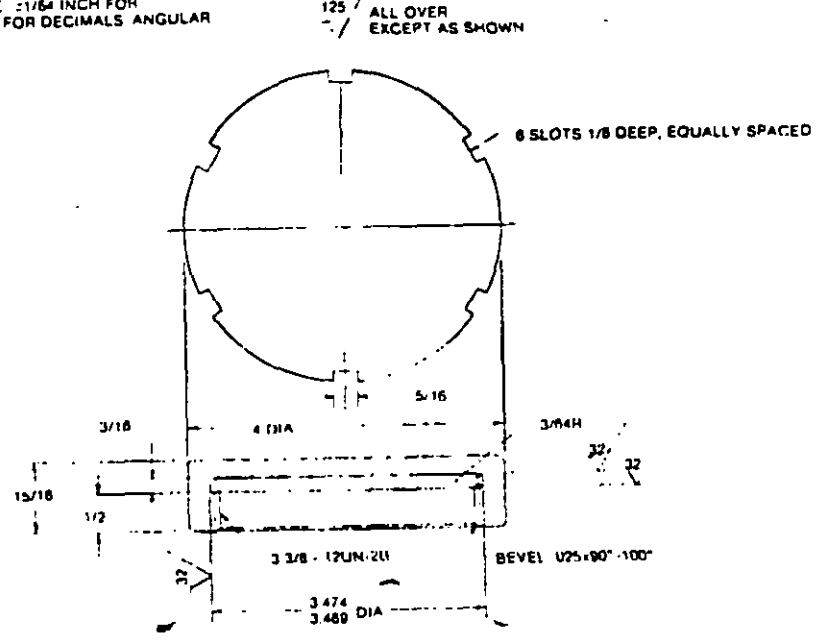

CAP M24231/22-054

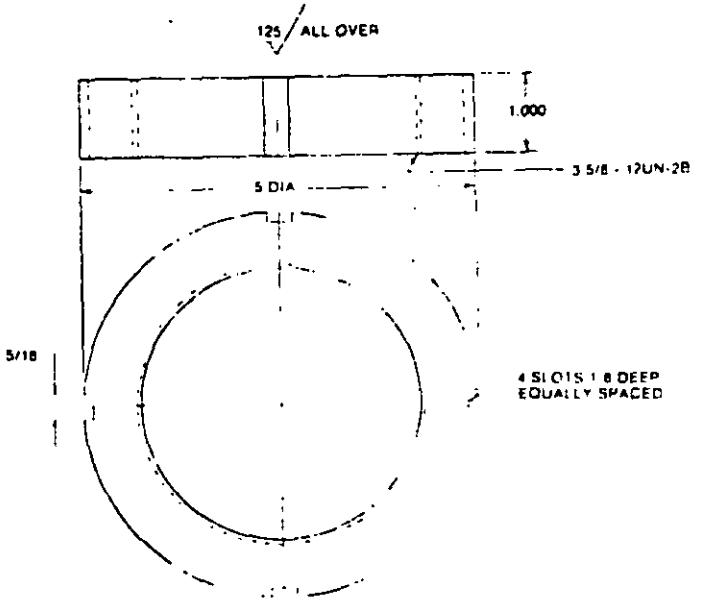

S/N 0505-LF-4665-4

NUT M24231/22-052

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

TABLE I - Parts list.

Part No.	Name	Quantity for M24231/22-001	Quantity for M24231/22-002
M24231/22-001	Assembly, Receptacle, 2.125 Base	1	
M24231/22-002	Assembly, Receptacle, 3.875 Base		1
M24231/22-010	Assembly, Receptacle Body	1	
M24231/22-020	Assembly, Receptacle Body		1
M24231/22-030	Assembly, Insert, Molded	1	
M24231/22-040	Assembly, Insert, Molded		1
M24231/22-051	Ring, Retaining	1	1
M24231/22-052	Nut, Round	1	1
M24231/22-053	Washer $\frac{3.640}{3.635}$ x 5.187	1	1
M24231/22-054	Cap	2	2
M24231/22-055	Pin, Positioning	1	1
M24231/22-056	Dowel Pin	2	2
ARP568-236	O-Ring Gasket	2	2
ARP568-134	O-Ring Gasket	1	1
ARP568-342	O-Ring Gasket	2	2
M24231/12-021	Cable, 2 Conductor Shielded	8	8
M24231/19-011	Retaining Ring	1	1

REQUIREMENTS:

1. *Dimensions and configuration : See figures.*
2. Material for the cap shall be nickel-aluminum-bronze in accordance with MIL-B-24059.
3. *Material for the nut and washer shall be K-monel, in accordance with Para 3.3.2.*
4. Material for the positioning pin and dowel pin shall be monel, class A of QQ-N-281.
5. *The retaining ring shall be Spiralox, RR-262-5, or equal.*
6. Receptacle bodies shall be machined from K-monel, in accordance with Para 3.3.2.
7. Each nut, washer, and receptacle body shall be examined for cracks by the liquid penetrant method of MIL-STD-271. Finding of cracks shall be cause for rejection.
8. Welding of the pin is allowed after the hull fitting body has been age-hardened to achieve its required physical properties. This gives the manufacturing activity
9. the option to make the body, nut and washer from any age hardened ni-cu-al alloy in accordance with class A of QQ-N-286 that will meet the mechanical properties listed in paragraph 3.3.2 of MIL-C-24231. In that case, the chemical and physical certification obtained from the supplier of the ni-cu-al alloy will satisfy certification requirements when supplemented by the required traceability markings identifying the finished product to the bar stock on which the chemical and physical analysis was performed.

Preparing activity:
Navy - SH
(Project 5935-N342-22)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.