MIL-C-24231/24D(SH)
15 May 1987
SUPERSEDING
MIL-C-24231/24C(SHIPS)
30 August 1976
(See note 3)

MILITARY SPECIFICATION SHEET

CONNECTOR, SINGLE CABLE, TYPE III, THREE-CONDUCTOR, FOR THOF-9 CABLE


This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the single cable connector described herein shall consist of this specification and the latest issue of MIL-C-24231.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

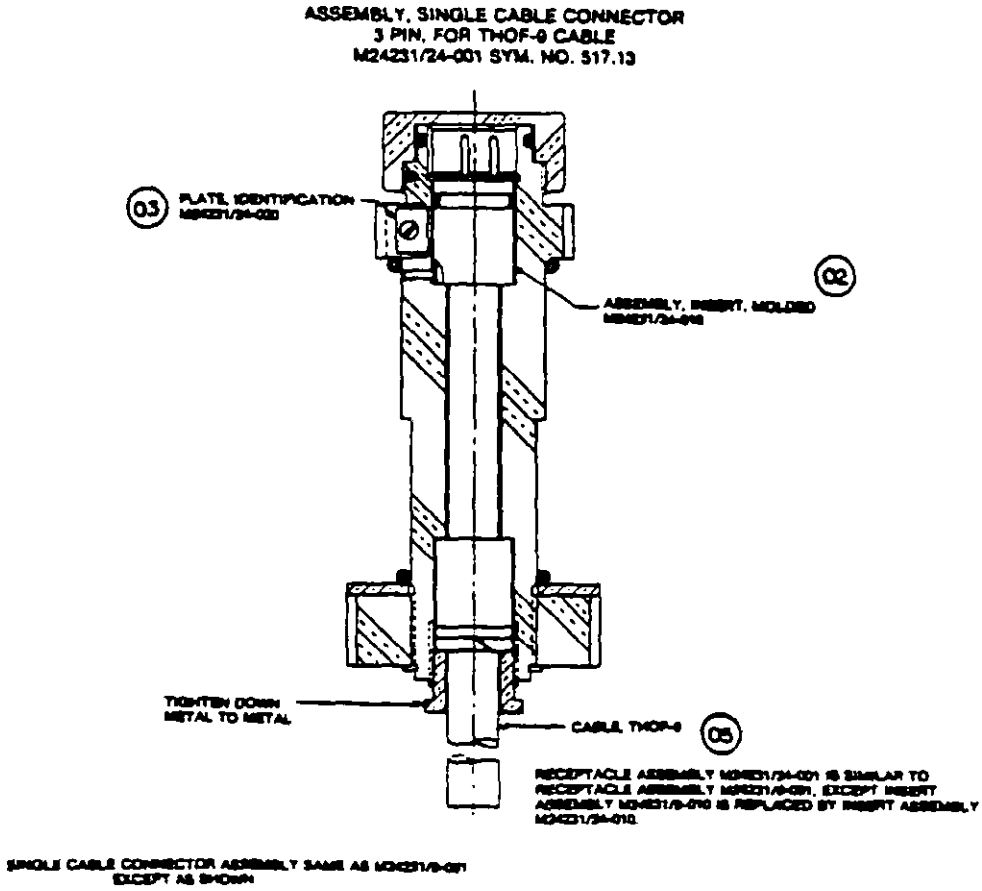

SH 9691

FIGURE 1. Connector, single cable. (01)

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:18Z
Check the source to verify that this is the current version before use.

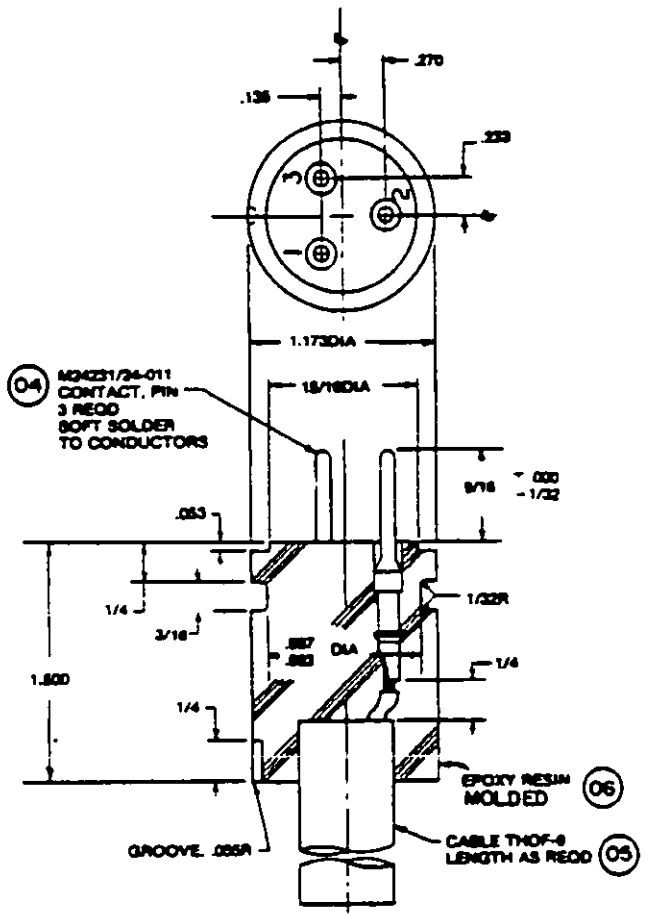


FIGURE 2. Assembly, insert, molded 3-pin - M24231/24-010. (02)

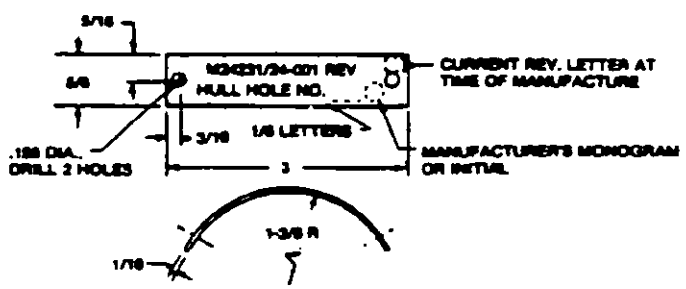


FIGURE 3. Plate, identification - M24231/24-020. (03)

SH 9691-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figures.
2. Pin contact shall be Bendix Aviation Corporation, size 12, solder type, Bendix Part Number 10-33646, or equal, with silver plate followed by gold plate not less than 0.0001 inch thick. Contact submitted as equal shall be approved by the contracting activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item 1/ no.	Description 2/	Quantity for M24231/24- 3/ 001	Material/specification	Remarks
01	Connector, single cable, symbol no. 517.13	1	Same as M24231/9-001, except as shown	See figure 1
02	Insert, assembly, molded	1	See items 04, 05, and 06	See figure 2
03	Plate, identification	1	CRES or A1, MIL-P-15024	See figure 3
04	Pin, contact	3	MIL-C-24231, requirement 2	See figure 2
05	Cable, THOF-9	As required	MIL-C-915/6	See figures 1 and 2
06	Epoxy resin, molded	As required	Cast epoxy resin compound 4/	See figure 3

1/ Item numbers are the same as encircled numbers shown on figures.
2/ See applicable figure or table listed in remarks column for part numbers and dimensions.
3/ Quantity is for one complete assembly of each size.
4/ Arcoset No. 200, M.M. Reif and Co., Rockledge, PA, or Phillicast No. 2, Philadelphia Resin Corp., Montgomeryville, PA, or equal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Unless otherwise indicated, tolerances shall be as follows:

   (a) Decimals - plus or minus 0.005 inch.
   (b) Fractions - plus or minus 1/64 inch.
   (c) Angular dimensions - plus or minus 1/2 degree.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N279-24)

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:18Z
Check the source to verify that this is the current version before use.