INCH-POUND
MIL-DTL-24231/24E(SH)
26 April 2013
SUPERSEDING
MIL-C-24231/24D(SH)
15 May 1987

DETAIL SPECIFICATION SHEET

CONNECTOR, SINGLE CABLE, TYPE III, THREE-CONDUCTOR, FOR LSTHOF-9 CABLE

This specification is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24231.

REQUIREMENTS:

1. Dimensions and configuration: see figures 1 through 3.

2. Pin contact shall be Amphenol Corporation, Size 12, solder type, part number 10-33646, with silver plate followed by gold plate not less than 0.0001 thick; or equal. Any other pin contact submitted as equal shall be subject to review by NAVSEA.

3. All dimensions are in inches.

4. Tolerances shall be as follows, or as stated:

a. Decimals – ±0.005 inch.


b. Fractions – ±1/64 inch.

c. Angular dimensions – ±½ degree.

5. The gland nut shall be tightened until the packing tightens against the wires and cables. This can be determined by moving the wires and cables gently back and forth until the wire and cable is seized by the packing. The gland nut shall be turned approximately one-fourth of a turn more to hold wires and cables in place. Do not overtighten the gland nut or attempt to tighten down metal to metal, as this can damage the wires and cables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

ASSEMBLY, SINGLE CABLE CONNECTOR
3 PIN, FOR THOF-9 CABLE
M24231/24-001 SYM. NO. 517.13

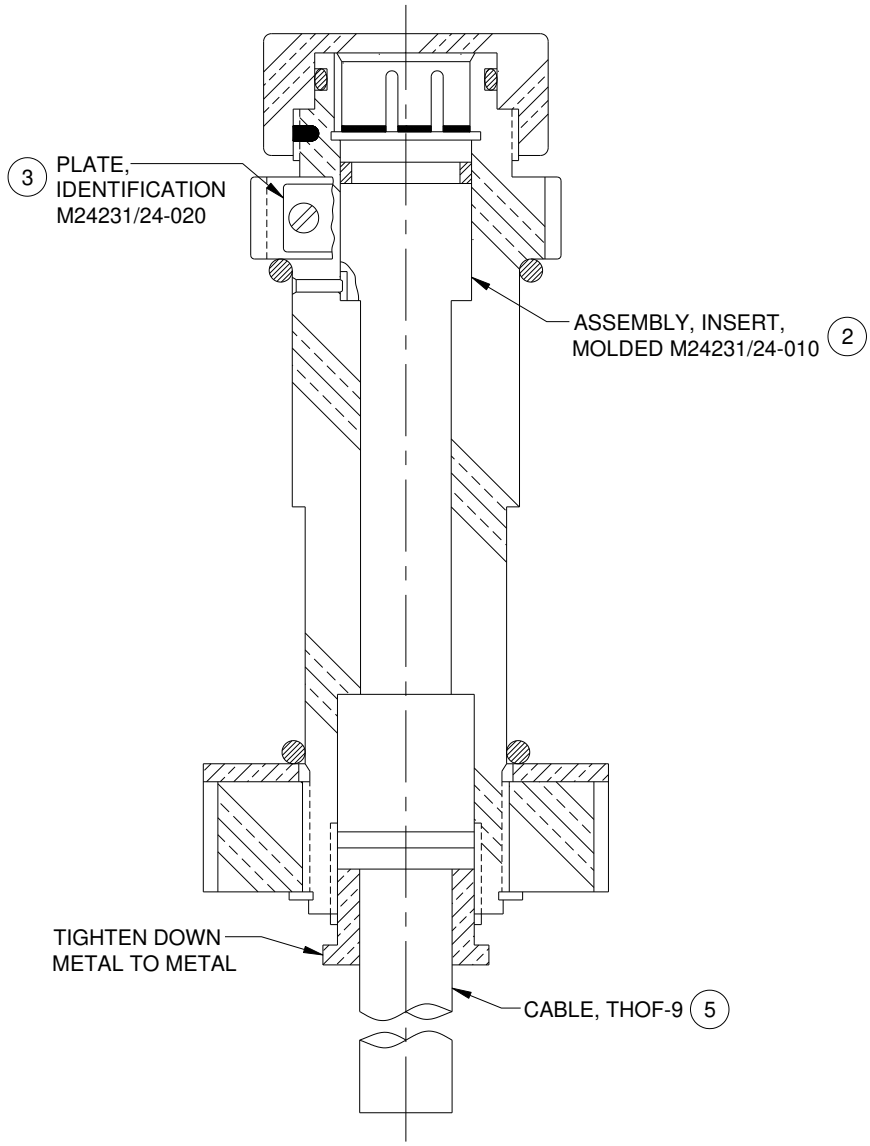

RECEPTACLE ASSEMBLY M24231/24-001 IS SIMILAR TO RECEPTACLE ASSEMBLY M24231/9-001, EXCEPT INSERT ASSEMBLY M24231/9-010 IS REPLACED BY INSERT ASSEMBLY M24231/24-010.

SINGLE CABLE CONNECTOR ASSEMBLY SAME AS M24231/9-001
EXCEPT AS SHOWN

FIGURE 1. Connector, single cable. (1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

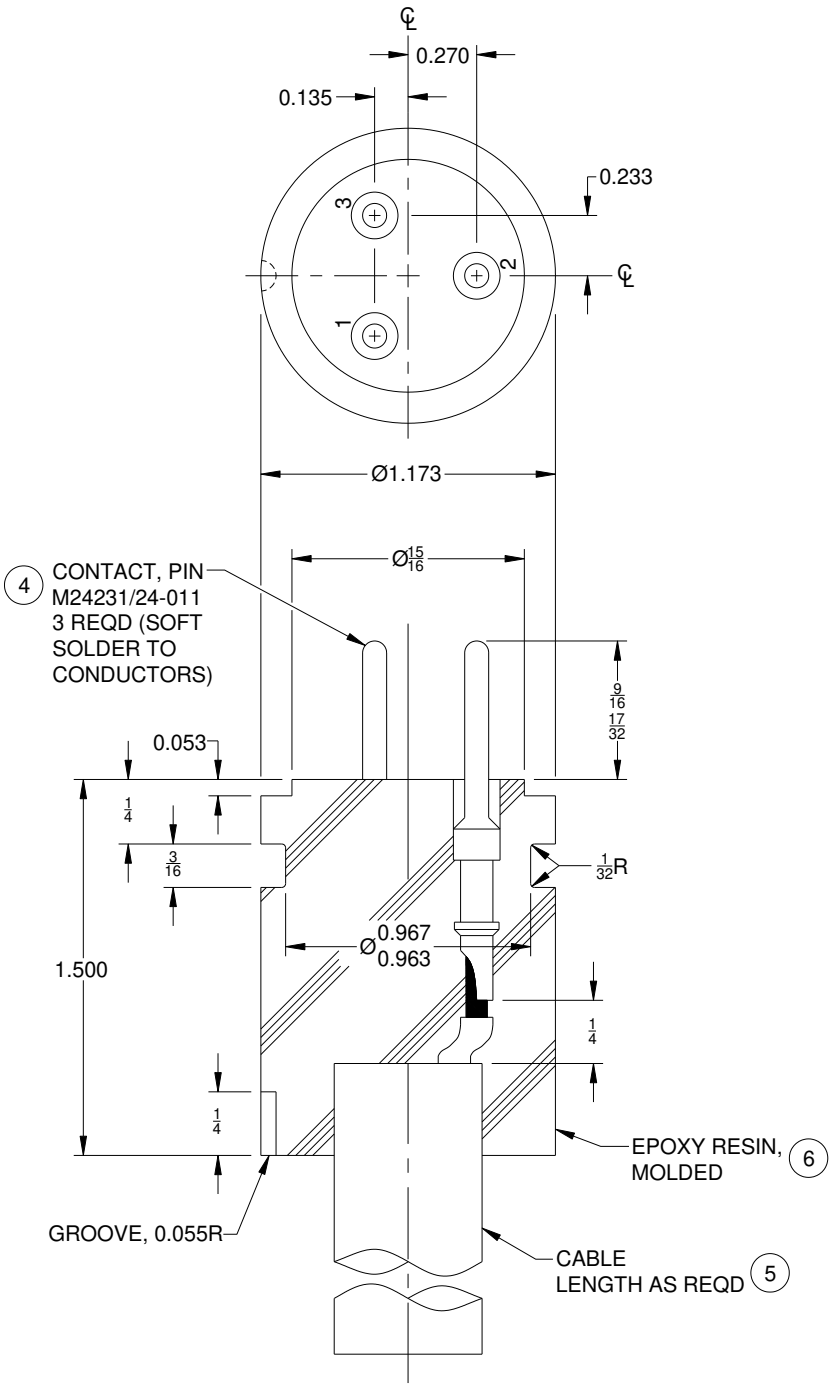


FIGURE 2. Assembly, insert, molded 3-pin – M24231/24-010. (2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

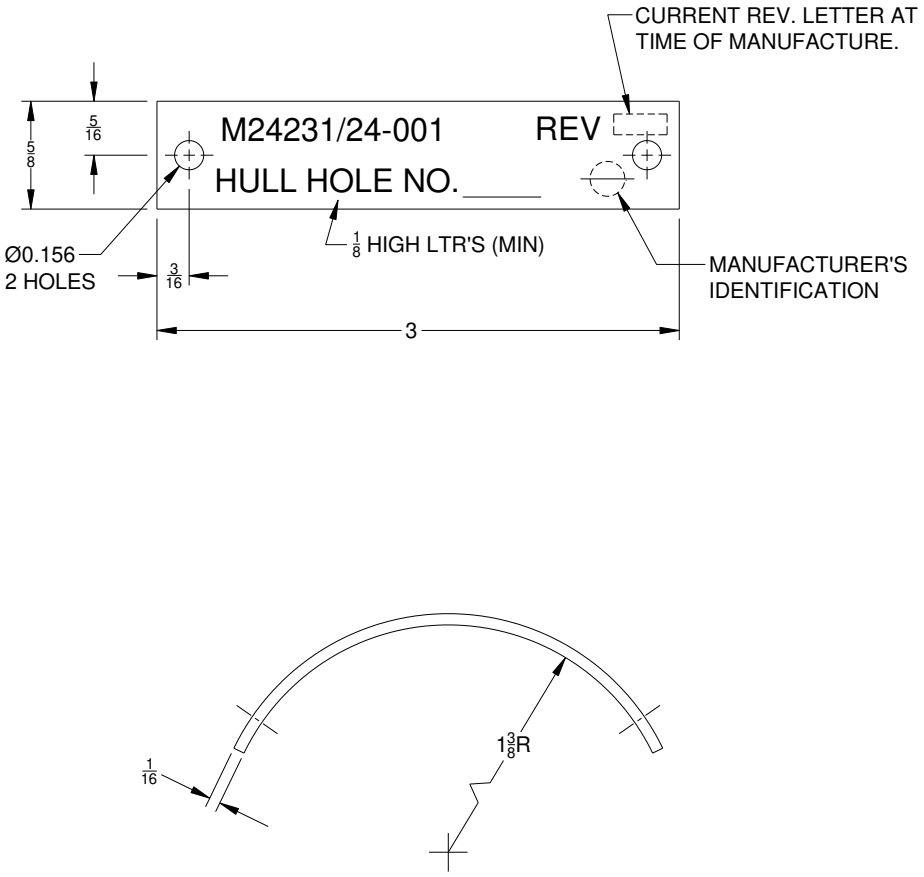


FIGURE 3. Plate, identification – M24231/24-020. (3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item no. 1/	Description 2/	Quantity for M24231/24- 3/	Material/specification	Remarks
		001		
1	Connector, single cable, symbol no. 517.13	1	Same as M24231/9-001; except as shown.	See figure 1.
2	Insert, assembly, molded	1	See items 04, 05, and 06.	See figure 2.
3	Plate, identification	1	CRES or Al, MIL-DTL-15024	See figure 3.
4	Pin, contact	3	MIL-DTL-24231	See figure 2 and requirement 2.
5	Cable, LSTHOF-9	As required	MIL-DTL-24643/3	See figure 1 and figure 2.
6	Epoxy resin, molded	As required	Cast epoxy resin compound 4/	See figure 3.

NOTES:

1/ Item numbers are the same as encircled numbers shown on figures.

2/ See applicable figure or table listed in remarks column for part numbers and dimensions.

3/ Quantity is for one complete assembly of each size.

4/ Arco Set 200, M.M. Reif and Co., Ivyland, PA, or PR610-TCF (Chockfast Orange), ITW Philadelphia Resins Corp., Montgomeryville, PA, or equal.

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Preparing activity:
Navy – SH
(Project 5935-2011-073)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.