MIL-C-24231/25D(SH)
15 May 1987
SUPERSEDING
MIL-C-24231/25C(SHIPS)
30 August 1976
(See note 3)

MILITARY SPECIFICATION SHEET

CONNECTOR, HULL INSERTS, TYPE VII


This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the hull inserts described herein shall consist of this specification and the latest issue of MIL-C-24231.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

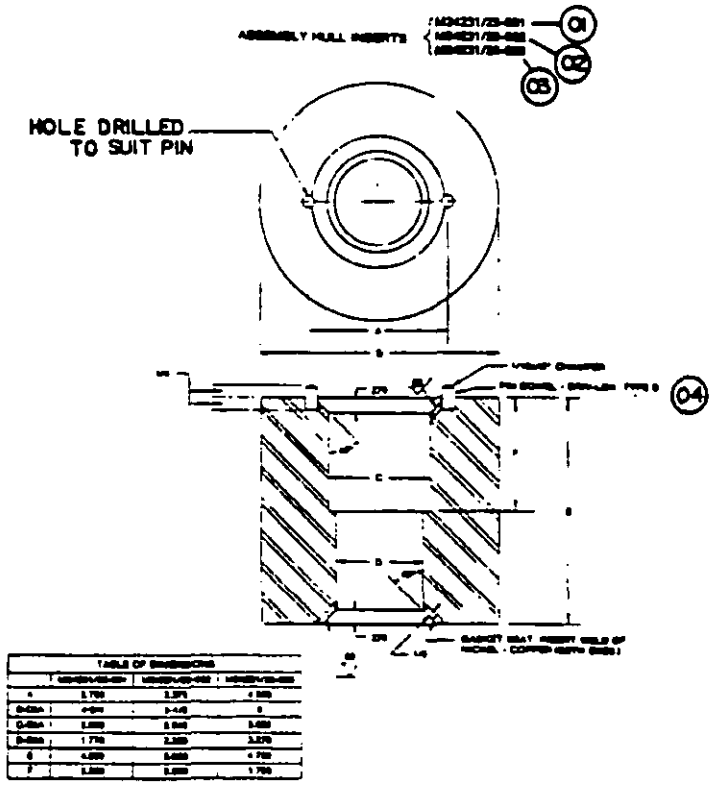

SH 9692

FIGURE 1. Connector, hull inserts - typical.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Hull inserts are not furnished as part of cable connector assemblies. Acquisition of hull inserts is the responsibility of the installing activity. Assurance that the hull insert adequately compensates for holes in submarine pressure hulls is the responsibility of the installing activity.
2. Inserts shall be made of a material compatible with the applicable hull. Hull inserts shall be manufactured from steel as follows:

   (a) For HY-80 steel hulls, steel grade HY-80 of MIL-S-21952 shall be used. The ends of inserts shall be stamped with identification symbol "HY-80" in 1/4-inch high letters.
   (b) For grade M steel hulls, grade A, B of MIL-S-22698 for HT steel hulls, grade A36 or AH36S of MIL-S-22698 shall be used. The ends of the insert shall be stamped with the identification symbol "HT" in 1/4-inch high letters. Heat treatment of HT inserts is not required.

3. Internal dimensions, height dimensions, and pin dowel dimensions, and location shall be provided.
4. Nickel copper cladding indicated for gasket seat shall be provided.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item 1/ no.	Description 2/	Quantity for M24231/25- 3/ 001	002	003	Material/specification	Remarks
01	Inserts, hull	1			-----	See figure 1
02	Inserts, hull		1		-----	See figure 1
03	Inserts, hull			1	-----	See figure 1
04	Pin, dowel, 1/4 diameter by 1/2 length	2	2	2	Drive-lok, type D CRES, coml, type 316 passivated, or equal	See figure 1

1/ Item numbers are the same as encircled numbers shown on figures.
2/ See applicable figure or table listed in remarks column for part numbers and dimensions.
3/ Quantity is for one complete assembly of each size.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Unless otherwise indicated, tolerances shall be as follows:

   (a) Decimals - plus or minus 0.005 inch.
   (b) Fractions - plus or minus 1/64 inch.
   (c) Angular dimensions - plus or minus 1/2 degree.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N279-25)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.