INCH-POUND

MIL-C-24231/25D(SH)
AMENDMENT 1
2 April 1993

MILITARY SPECIFICATION SHEET

CONNECTOR, HULL INSERTS, TYPE VII

This amendment forms a part of Military Specification MIL-C-24231/25D(SH), dated 15 May 1987, and is approved for use by the Naval Sea Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 2

Figure 1: Delete and substitute: (see page 2)

PAGE 3

Requirment 2(a), line 1: add "or MIL-S-23009" after "MIL-S-21952".

Requirement 2(a), line 3: add "Welding and inspection of the hull inserts shall be in accordance with MIL-STD-1688." after "....high letters."

Requirement 2(b), line 5: add "Welding and inspection of the hull inserts shall be in accordance with MIL-STD-1689." after "....is not required."

Preparing activity:
Navy -SH
(Project 5935-N454)

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

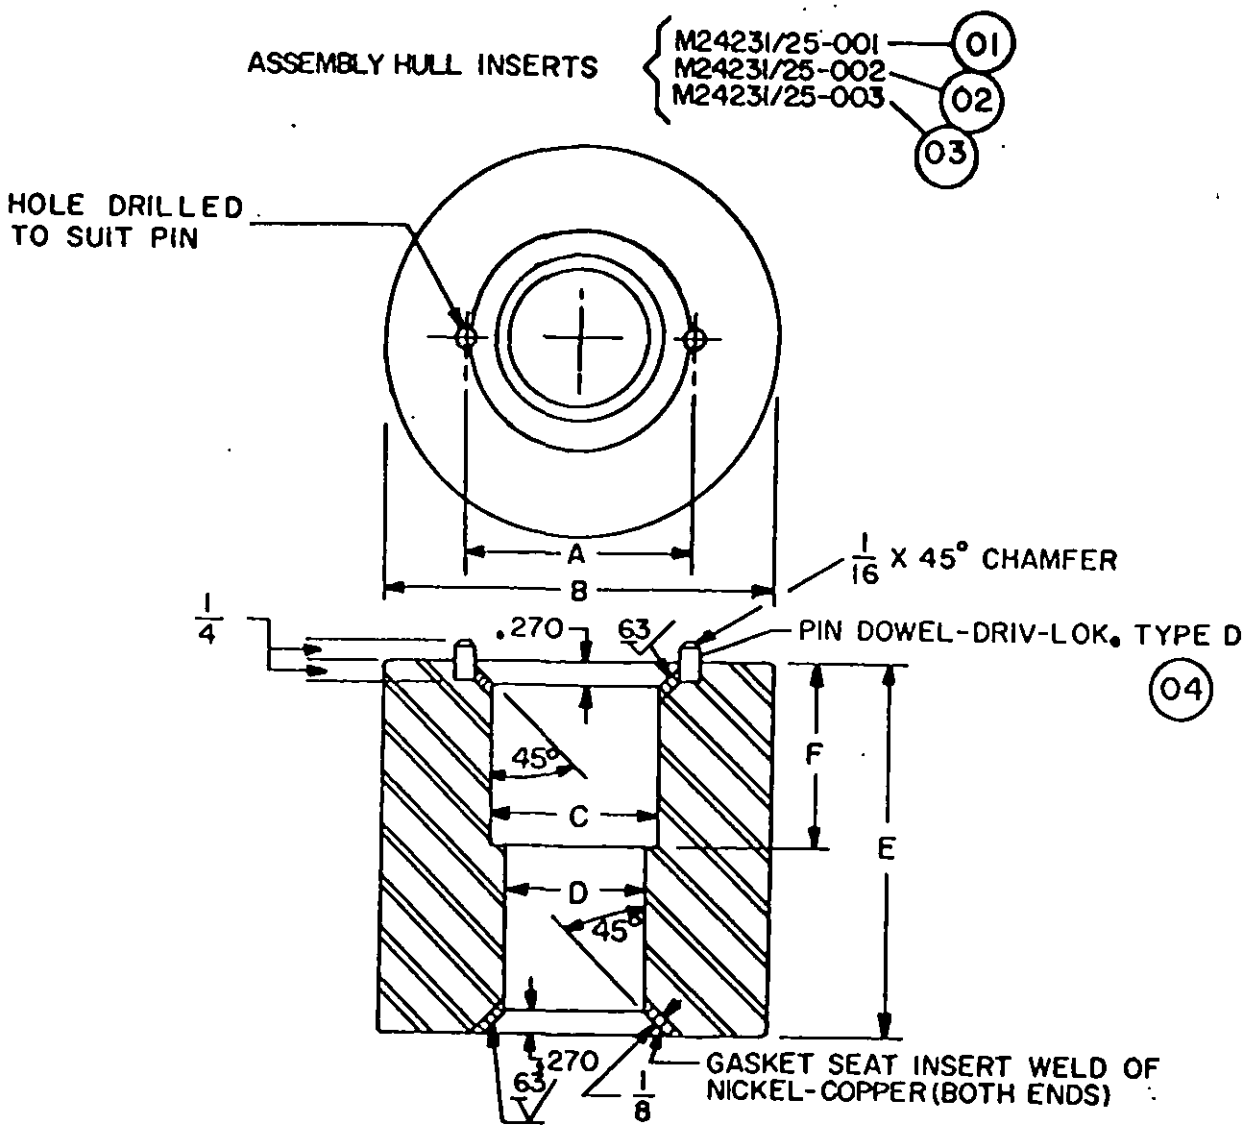


TABLE OF DIMENSIONS			
	M24231/25-001	M24231/25-002	M24231/25-003
A	2.750	3.375	4.500
B-DIA	4-3/4	5-1/2	6
C-DIA	2.020	2.645	3.625
D-DIA	1.770	2.395	3.270
E	4.500	5.000	4.750
F	2.250	2.500	1.750

FIGURE 1. Connector, hull inserts - typical.

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:18Z
Check the source to verify that this is the current version before use.


MIL-C-24231/25C(SHIPS)
30 August 1975
SUPERSEDING
MIL-C-24231/25B(SHIPS)
15 January 1970

MILITARY SPECIFICATION SHEET

CONNECTOR, HULL INSERTS

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of the Defense.

The complete requirements for procuring the hull inserts described herein shall consist of this document and the latest issue of MIL-C-24231(SHIPS).

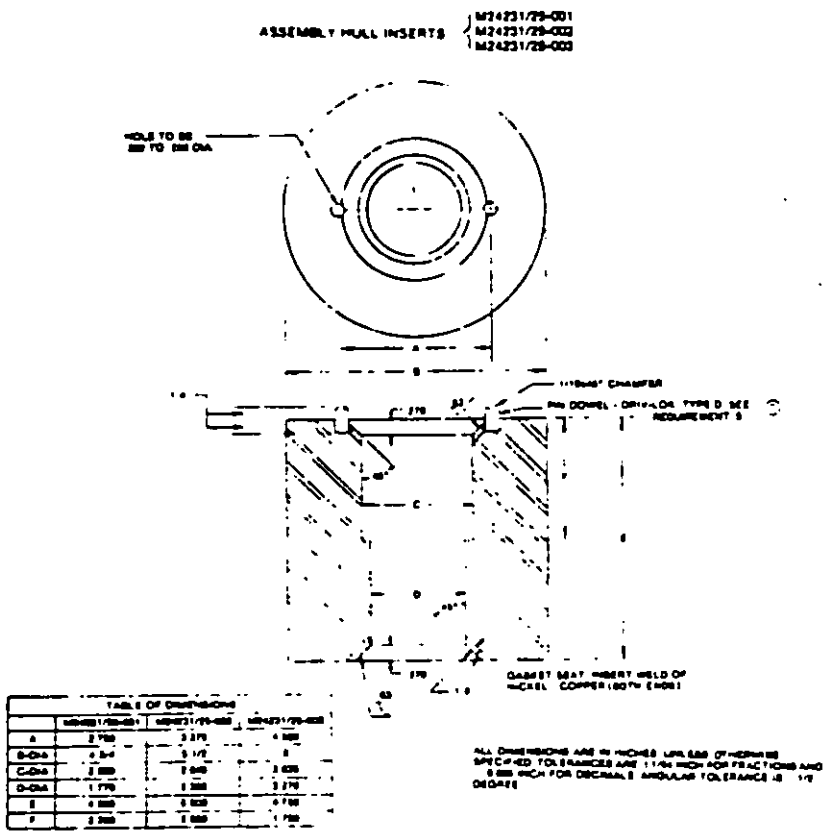

C Denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

(C) 1. Hull inserts are not furnished as part of cable connector assemblies. Procurement of hull inserts is the responsibility of the installing activity. Assurance that the hull insert adequately compensates for holes in submarine pressure hulls is the responsibility of the installing activity.

2. Inserts shall be made of a material compatible with the applicable hull.

3. Internal dimensions, height dimensions, and pin dowel dimensions, and location are mandatory.

4. Nickel copper cladding indicated shall provide long-life, corrosion-free gasket seat and is mandatory.

(C) 5. Dowel pins shall be Driv-Lok pin, type D, corrosion-resistant steel, commercial, type 316, 1/4 inch diameter by 1/2 inch long, with a passivated finish or equal.

6. Hull inserts shall be manufactured from steel as follows:

(a) For HY-80 steel hulls, steel grade HY-80 of MIL-S-21952 shall be used. The ends of inserts shall be stamped with identification symbol "HY-80" in 1/4-inch high letters.

(b) For grade M or HT steel hulls, grade HT of MIL-S-20166 shall be used. The ends of the insert shall be stamped with the identification symbol "HT" in 1/4-inch high letters. Heat treatment of HT inserts is not required.

Preparing activity:
Navy - SH
(Project 5935-N842-25)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.