INCH-POUND
MIL-DTL-24231/25E(SH)
26 April 2013
SUPERSEDING
MIL-C-24231/25D(SH)
w/AMENDMENT 1
2 April 1993
MIL-C-24231/25D(SH)
15 May 1987

DETAIL SPECIFICATION SHEET

CONNECTOR, HULL INSERTS, TYPE VII

This specification is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24231.

REQUIREMENTS:

1. Hull inserts are not furnished as part of cable connector assemblies. Acquisition of hull inserts is the responsibility of the installing activity. Assurance that the hull insert adequately compensates for holes in submarine pressure hulls is the responsibility of the installing activity.

2. Inserts shall be made of a material compatible with the applicable hull. Hull inserts shall be manufactured from steel as follows:

a. For HY-80 steel hulls, steel grade HY-80 of T9074-BD-GIB-010/300 shall be used. The ends of inserts shall be stamped with identification symbol "HY-80" in ¼-inch high letters. Welding and inspection of the hull inserts shall be in accordance with T9074-AD-GIB-010/1688.

b. Ordinary strength steel hulls shall use Grade A or B of the American Bureau of Shipping (ABS) Rules for Building and Classing Steel Vessels, Part 2, Section 1 (with the supplementary requirements in Appendix 2/D). Higher strength steel hulls shall use EH-36 or the ABS Rules.

3. Internal dimensions, height dimensions, pin dowel dimensions, and the location shall be provided.

4. Nickel copper cladding indicated for gasket seat shall be provided.

5. All dimensions are in inches.

6. Tolerances shall be as follows, or as stated:

a. Decimals – ±0.005 inch.

b. Fractions – ±1/64 inch.

c. Angular dimensions – ±½degree.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

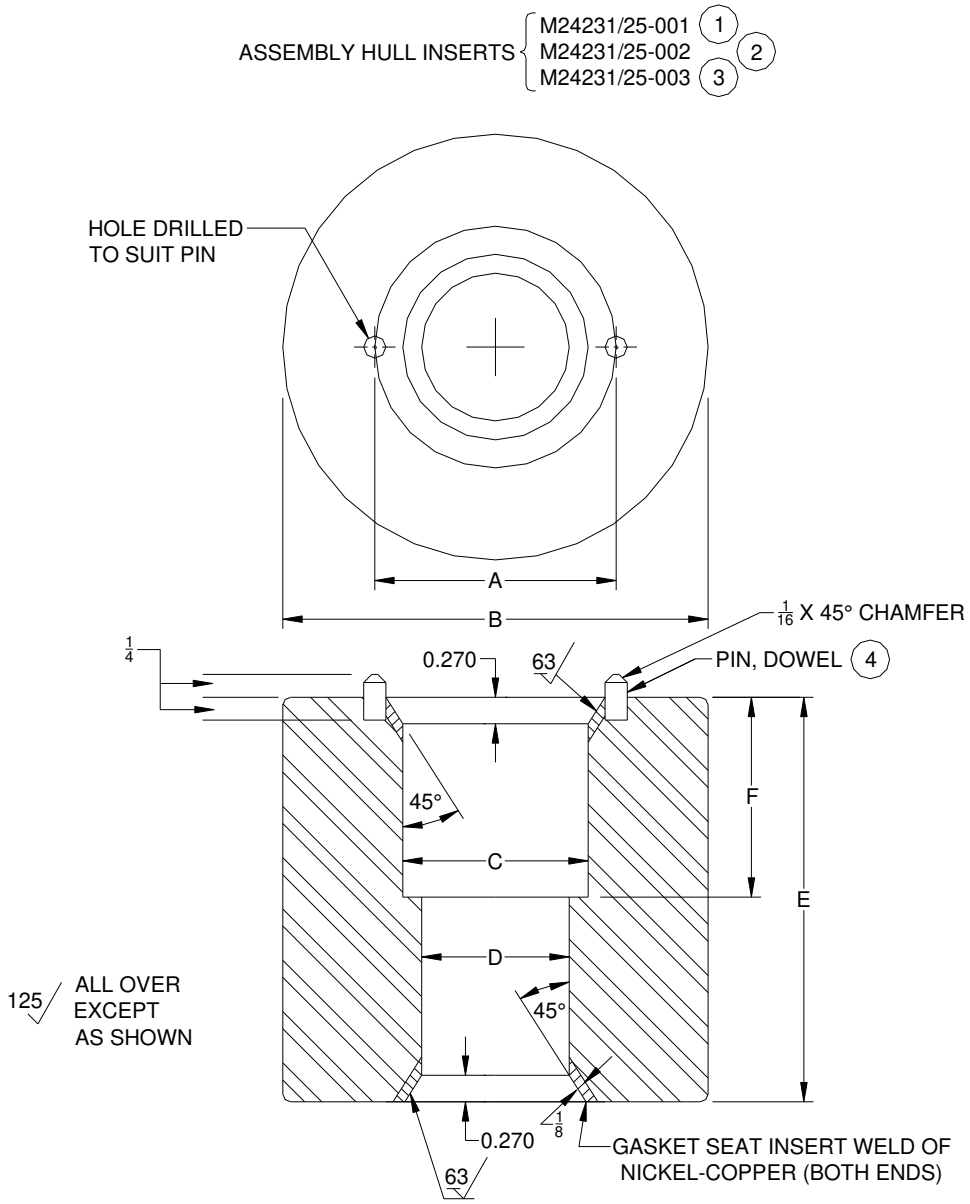


TABLE OF DIMENSIONS			
	M24231/25-001	M24231/25-002	M24231/25-003
A	2.750	3.375	4.500
B-DIA	$4\frac{3}{4}$	$5\frac{1}{2}$	6
C-DIA	2.020	2.645	3.625
D-DIA	1.770	2.395	3.270
E	4.500	5.000	4.750
F	2.250	2.500	1.750

FIGURE 1. Connector, hull inserts – typical.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item no. 1/	Description 2/	Quantity for M24231/25- 3/			Material/specification	Remarks
		001	002	003		
1	Insert, hull	1			-----	See figure 1.
2	Insert, hull		1		-----	See figure 1.
3	Insert, hull			1	-----	See figure 1.
4	Pin, dowel, ¼ diameter by ½ length	2	2	2	Driv-lok, Type D, CRES, coml, Type 316 passivated, or equal	See figure 1.

NOTES:

1/ Item numbers are the same as encircled numbers shown on figure.

2/ See applicable figure or table listed in remarks column for part numbers and dimensions.

3/ Quantity is for one complete assembly of each size.

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Preparing activity:
Navy – SH
(Project 5935-2011-074)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:18Z
Check the source to verify that this is the current version before use.