MIL-C-24231/26D(SH)
15 May 1987
SUPERSEDING
MIL-C-24231/26C(SHIPS)
30 August 1976
(See note 3)

MILITARY SPECIFICATION SHEET

CONNECTOR, SINGLE CABLE, TYPE III, FOR TYPE 2SWF CABLES

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the single cable connector described herein shall consist of this specification and the latest issue of MIL-C-24231.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.


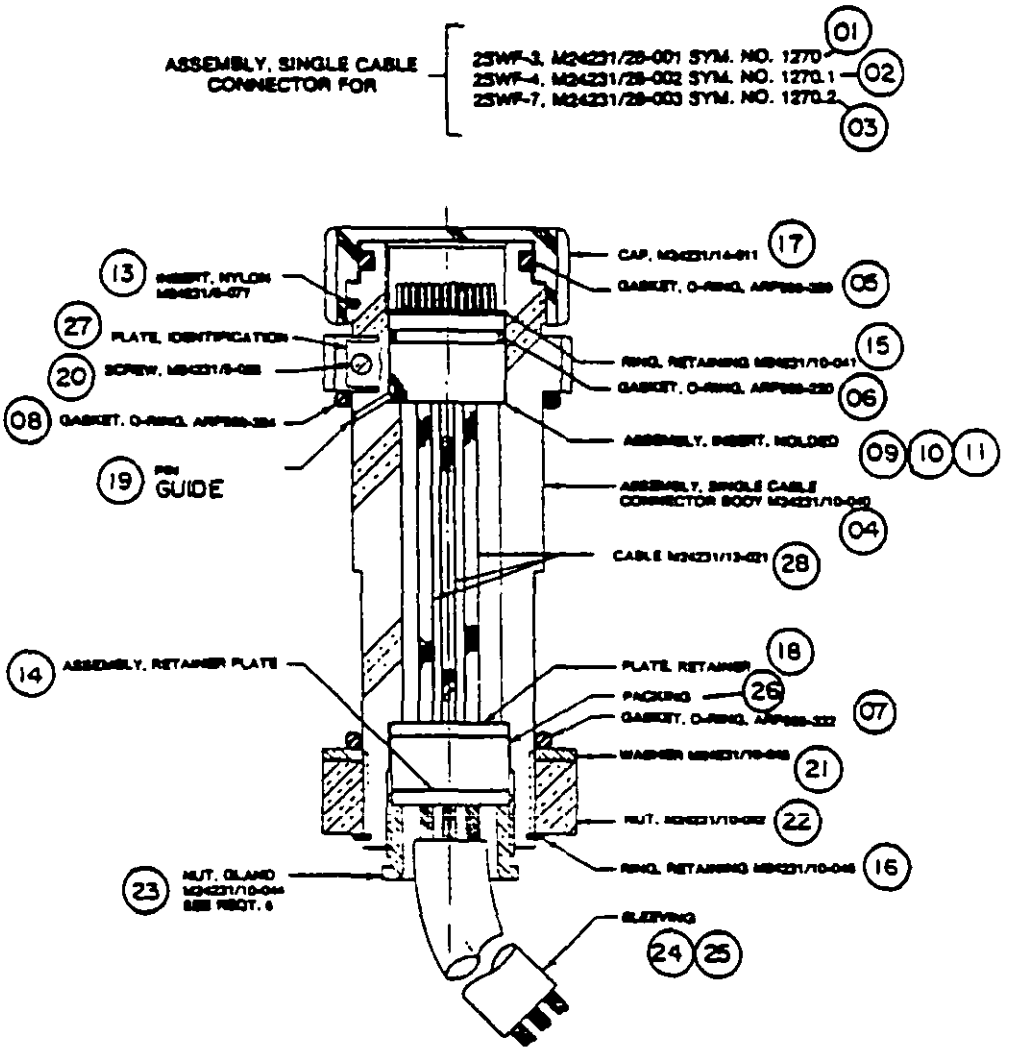


FIGURE 1. Connector, single cable.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T20:19Z
Check the source to verify that this is the current version before use.

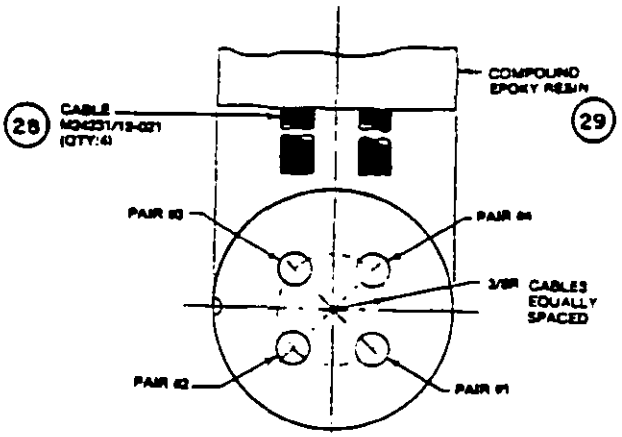

10

FIGURE 3. Assembly, insert, molded - M24231/26-030 same as M24231/26-020, except as shown.

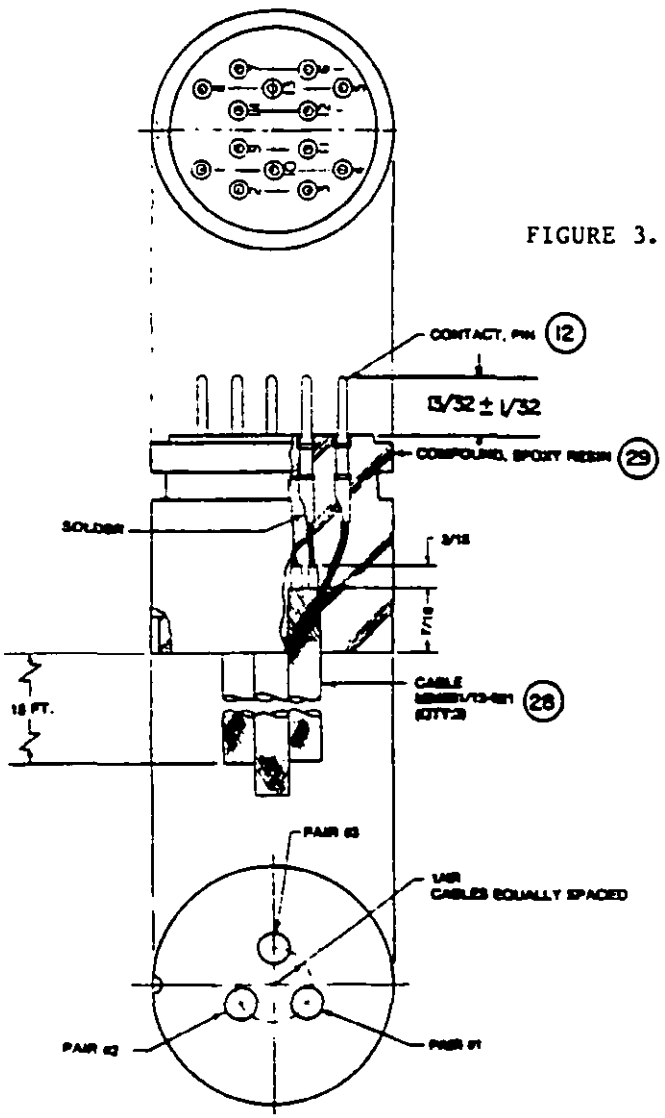


FIGURE 2. Assembly, insert, molded - M24231/26-020 same as M24231/10-010 except as shown. 09


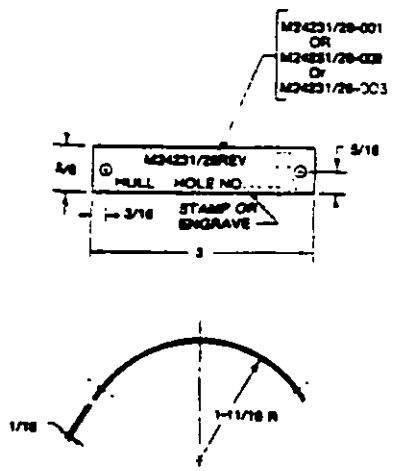


FIGURE 4. Plate identification.
M24231/26-011
M24231/26-012
M24231/26-013

SH 9693-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.

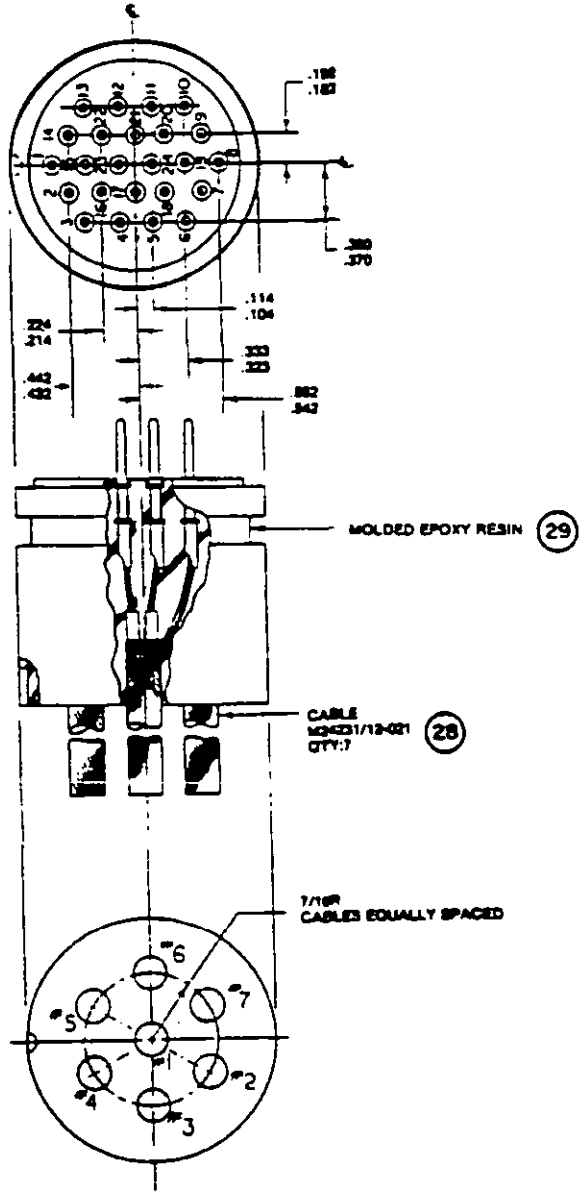

SH 9693-2

FIGURE 5. Assembly, insert, molded - M24231/26-040. (11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figures.
2. Any unused holes in retainer plates and packing shall be plugged with cable type 2SWU-1 in accordance with MIL-C-24643/33.
3. Cable shall be marked with pin circuit identification numbers at the exposed ends.
4. Cables shall be protected after installation by a method approved by the contracting activity.
5. Single cable connectors shall be used with cables 2SWF-3, 2SWF-4, and 2SWF-7 as specified in MIL-C-915/48.
6. The gland nut shall be tightened until the packing tightens against cables. This can be determined by moving cables gently back and forth until the cable is seized by the packing. The gland nut shall be turned approximately one-fourth of a turn more to hold cables in place. Do not overtighten the gland nut or attempt to tighten down metal to metal, as this can damage the cables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item 1/ no.	Description 2/	Quantity for M24231/26- 3/ 001	002	003	Material/specification	Remarks
01	Connector, single cable, symbol no. 1270	1			-----	See figure 1
02	Connector, single cable, symbol no. 1270.1		1		-----	See figure 1
03	Connector, single cable, symbol no. 1270.2			1	-----	See figure 1
04	Body, connector	1	1	1	M24231/10-040	See figure 1
05	Gasket, O-ring	1	1	1	MS28775-329	Lubricate with silicone compound MIL-S-8660, see figure 1
06	Gasket, O-ring	1	1	1	MS28775-220	See item 05
07	Gasket, O-ring	1	1	1	MS28775-332	See item 05
08	Gasket, O-ring	1	1	1	MS28775-334	See item 05
09	Insert, molded	1			See items 12, 28, and 29	See figure 2
10	Insert, molded		1		See items 12, 28, and 29	See figure 3
11	Insert, molded			1	See items 12, 28, and 29	See figure 5
12	Pin, contact	14	14	24	MIL-C-24231	See figure 2
13	Insert	1	1	1	M24231/5-077	See figure 1

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list. - Continued

Item 1/ no.	Description 2/	Quantity for M24231/26- 3/ 001	002	003	Material/specification	Remarks
14	Retainer, plate assembly	1	1	1	M24231/11-020	See figure 1
15	Ring, retaining	1	1	1	M24231/10-041	See figure 1
16	Ring, retaining	1	1	1	M24231/10-045	See figure 1
17	Cap, pressure-proof	1	1	1	M24231/14-011	See figure 1
18	Plate, retainer	1	1	1	M24231/11-021, type J	See figure 1 and requirement 2
19	Pin, guide	1	1	1	M24231/5-071	See figure 1
20	Screw	2	2	2	M24231/5-083	See figure 1
21	Washer	1	1	1	M24231/10-043	See figure 1
22	Nut	1	1	1	M24231/10-042	See figure 1
23	Nut, gland	1	1	1	M24231/10-044	See figure 1
24	Sleeving	15 ft	15 ft		M24231/10-011	See figure 1
25	Sleeving			15 ft	M24231/10-021	See figure 1
26	Packing	1	1	1	M24231/10-011, type J	See figure 1
27	Plate, identification	1	1	1	CRES or A1, MIL-P-15024	See figure 4
28	Cable, 2SWU-1, 15 ft	3	4	7	M24231/12-021, MIL-C-24643/33	See requirements 3 and 4
29	Epoxy resin, molded	As required			Cast epoxy resin compound 4/	See figures 2, 3, and 5

See footnotes at top of next page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.

1/ Item numbers are the same as encircled numbers shown on figures.
2/ See applicable figure or table listed in remarks column for part numbers and dimensions.
3/ Quantity is for one complete assembly of each size.
4/ Arcoset No. 200, M.M. Reif and Co., Rockledge, PA, or Phillicast No. 2, Philadelphia Resin Corp., Montgomeryville, PA, or equal.

NOTES:

1. All dimensions are in inches.
2. Unless otherwise indicated, tolerances shall be as follows:

   (a) Decimals - plus or minus 0.005 inch.
   (b) Fractions - plus or minus 1/64 inch.
   (c) Angular dimensions - plus or minus 1/2 degree.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N279-26)

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:19Z
Check the source to verify that this is the current version before use.