INCH-POUND
MIL-DTL-24231/26E(SH)
26 April 2013
SUPERSEDING
MIL-C-24231/26D(SH)
15 May 1987

DETAIL SPECIFICATION SHEET

CONNECTOR, SINGLE CABLE, TYPE III, FOR TYPE 2SWF CABLES

This specification is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24231.

REQUIREMENTS:

1. Dimensions and configuration: see figures 1 through 5.

2. Where a standard gland assembly (Type J in accordance with MIL-DTL-24231/11) is used, any unused holes in retainer plates and packing shall be plugged with cable Type LS2SWU-1 in accordance with MIL-DTL-24231/11.

3. Cable shall be marked with pin circuit identification numbers at the exposed ends.

4. Cables shall be protected after installation by a method approved by the contracting activity.

5. The gland nut shall be tightened until the packing tightens against the cables. This can be determined by moving the cables gently back and forth until the cable is seized by the packing. The gland nut shall be turned approximately one-fourth of a turn more to hold cables in place. Do not overtighten the gland nut or attempt to tighten down metal to metal, as this can damage the cables.

6. Unless otherwise specified (see figure 2), all dimensions are in inches.

7. Tolerances shall be as follows, or as stated:

a. Decimals – ±0.005 inch.

b. Fractions – ±1/64 inch.

c. Angular dimensions – ±½degree.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.

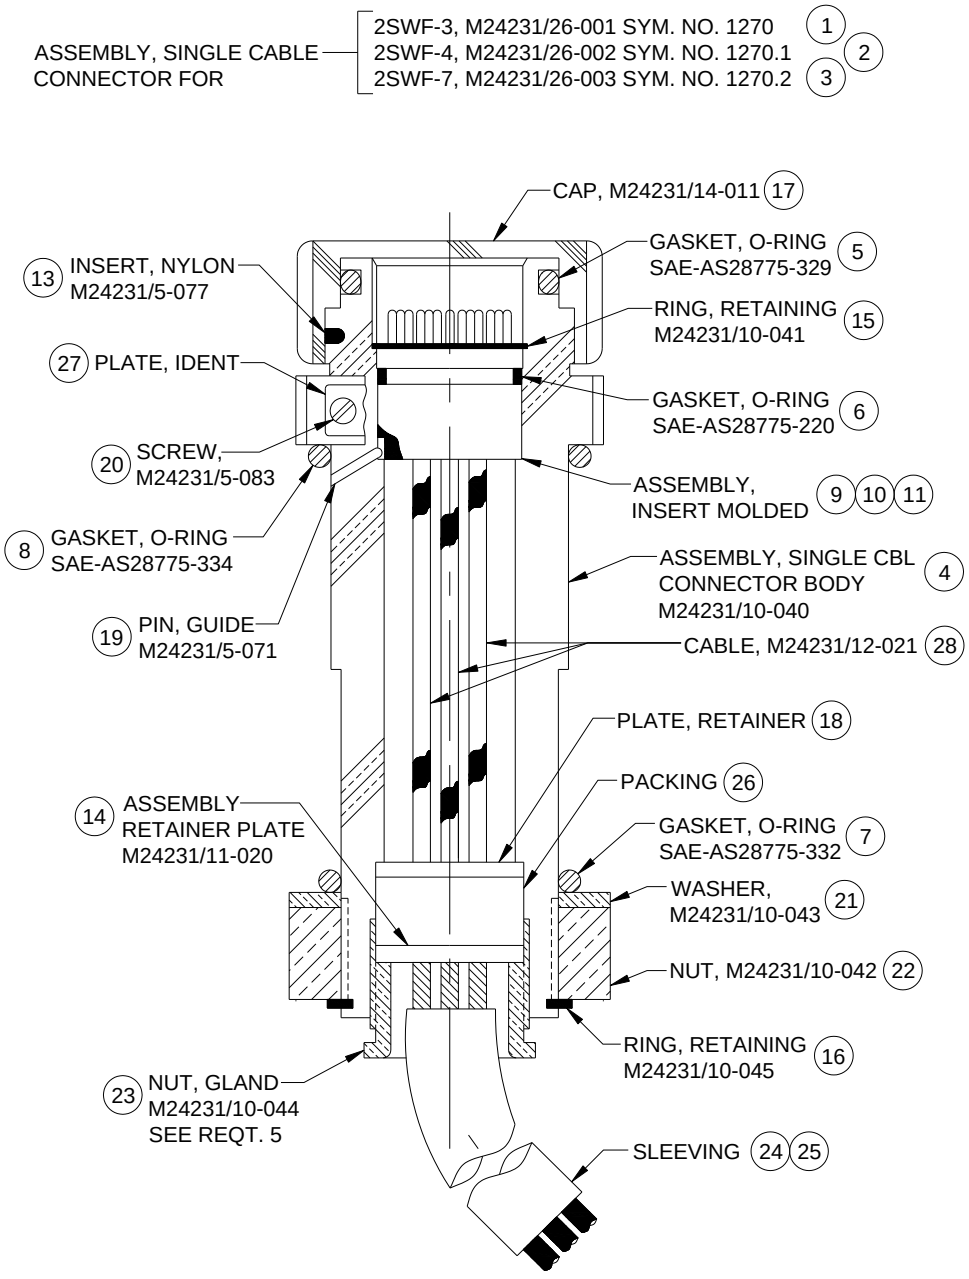


FIGURE 1. Connector, single cable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.

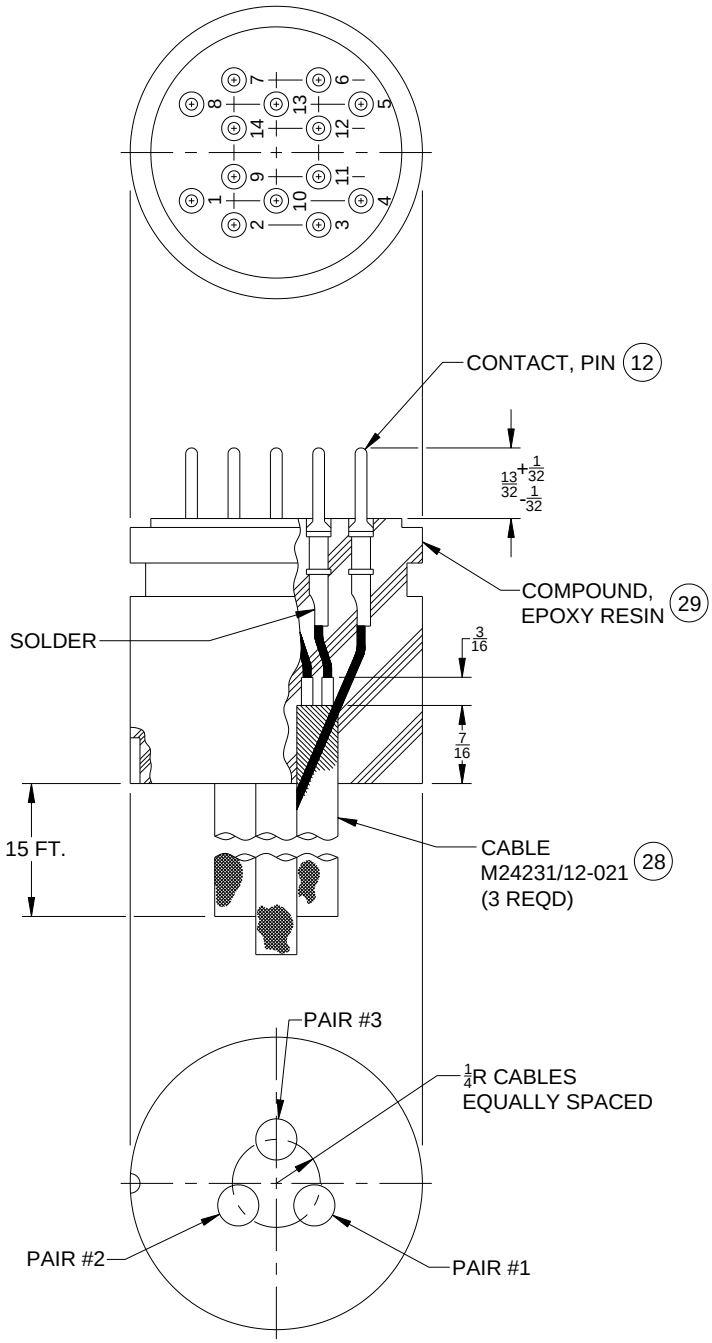


FIGURE 2. Assembly, insert, molded – M24231/26-020 same as M24231/10-010, except as shown. (9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.

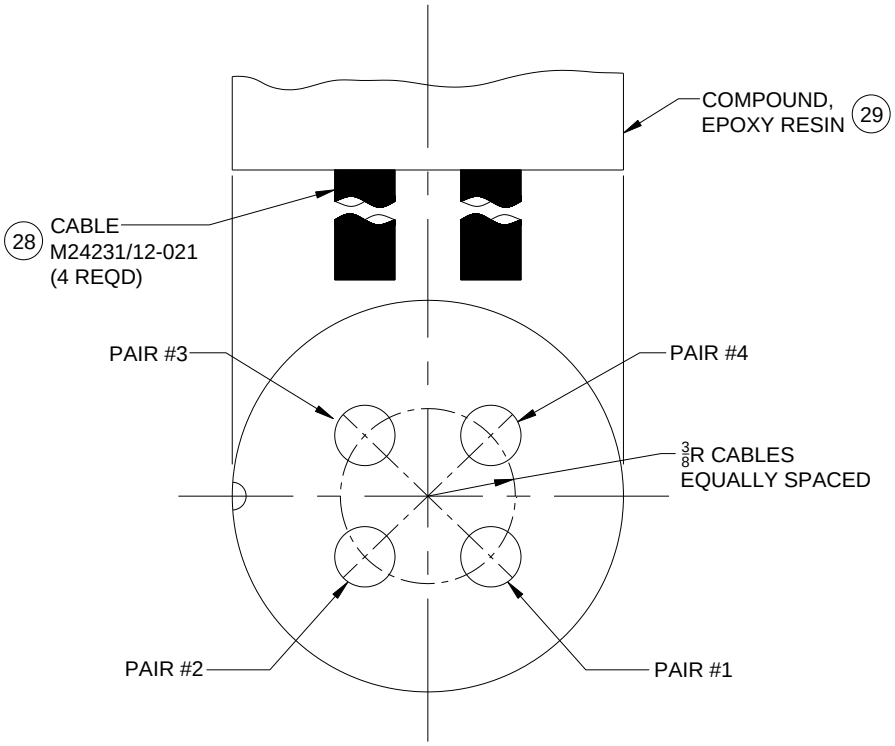


FIGURE 3. Assembly, insert, molded – M24231/26-030 same as M24231/26-020, except as shown. (10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.


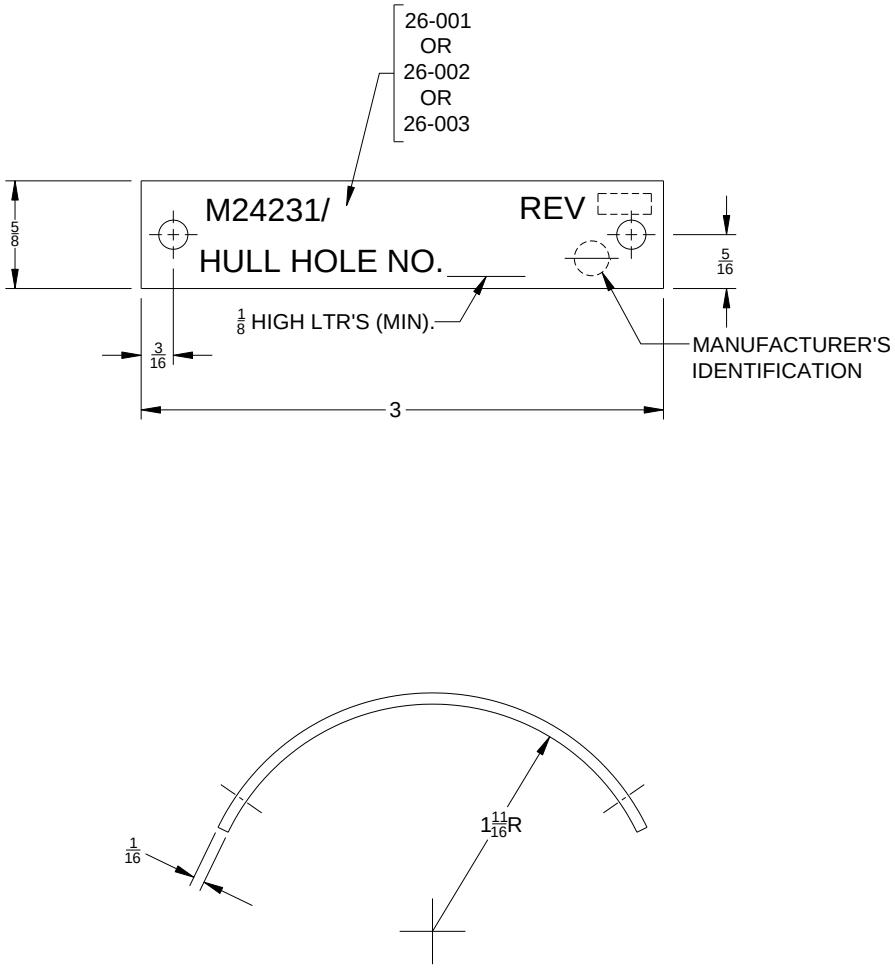


FIGURE 4. Plate identification – M24231/26-011, M24231/26-012, and M24231/26-013.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.

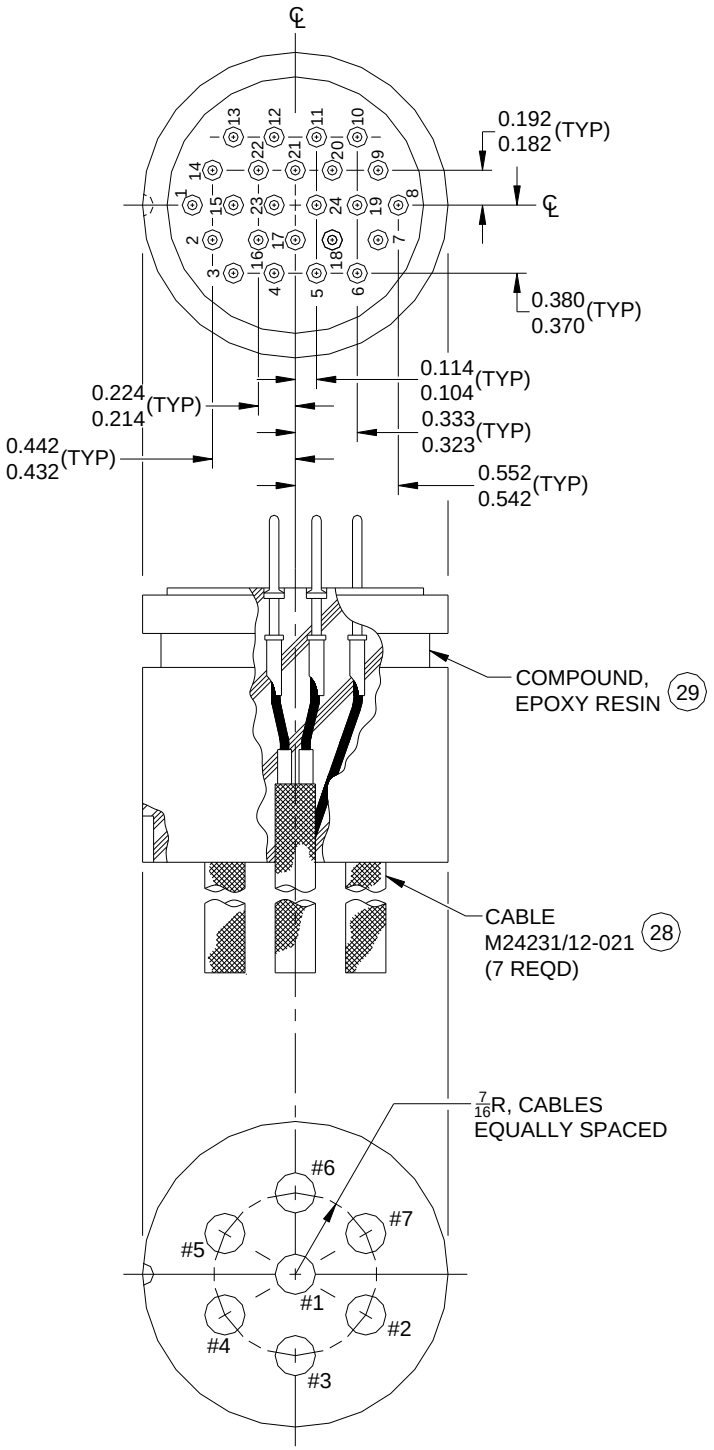

SAME AS M24231/26-020 EXCEPT AS SHOWN

FIGURE 5. Assembly, insert, molded – M24231/26-040. (11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item no. [1/]	Description [2/]	Quantity for M24231/26- [3/]			Material/specification	Remarks
		001	002	003		
1	Connector, single cable, symbol no. 1270	1			-----	See figure 1.
2	Connector, single cable, symbol no. 1270.1		1		-----	See figure 1.
3	Connector, single cable, symbol no. 1270.2			1	-----	See figure 1.
4	Body, connector	1	1	1	M24231/10-040	See figure 1.
5	Gasket, O-ring	1	1	1	SAE-AS28775-329 [4/]	Lubricate with silicone compound, SAE-AS8660; see figure 1.
6	Gasket, O-ring	1	1	1	SAE-AS28775-220 [4/]	See item 5.
7	Gasket, O-ring	1	1	1	SAE-AS28775-332 [4/]	See item 5.
8	Gasket, O-ring	1	1	1	SAE-AS28775-334 [4/]	See item 5.
9	Insert, molded	1			See items 12, 28, and 29.	See figure 2.
10	Insert, molded		1		See items 12, 28, and 29.	See figure 3.
11	Insert, molded			1	See items 12, 28, and 29.	See figure 5.
12	Pin, contact	14	14	24	MIL-DTL-24231	See figure 2.
13	Insert	1	1	1	M24231/5-077	See figure 1.
14	Retainer, plate assembly	1	1	1	M24231/11-020	See figure 1.
15	Ring, retaining	1	1	1	M24231/10-041	See figure 1.
16	Ring, retaining	1	1	1	M24231/10-045	See figure 1.
17	Cap, pressure-proof	1	1	1	M24231/14-011	See figure 1.
18	Plate, retainer	1	1	1	M24231/11-021, Type J	See figure 1 and requirement 2.
19	Pin, guide	1	1	1	M24231/5-071	See figure 1.
20	Screw	2	2	2	M24231/5-083	See figure 1.
21	Washer	1	1	1	M24231/10-043	See figure 1.
22	Nut	1	1	1	M24231/10-042	See figure 1.
23	Nut, gland	1	1	1	M24231/10-044	See figure 1.
24	Sleeving	15 ft	15 ft		M24231/10-011	See figure 1.
25	Sleeving			15 ft	M24231/10-021	See figure 1.
26	Packing	1	1	1	M24231/10-011, Type J	See figure 1.
27	Plate, identification	1	1	1	CRES or Al, MIL-DTL-15024	See figure 4.
28	Cable, LS2SWU-1, 15 ft	3	4	7	M24231/12-021, MIL-DTL-24643/33	See requirements 3 and 4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list – Continued.

Item no. 1/	Description 2/	Quantity for M24231/26- 3/			Material/Specification	Remarks
		001	002	003		
29	Compound, epoxy resin	As required			Cast epoxy resin compound 5/	See figure 2, figure 3, and figure 5.

NOTES:

1/ Item numbers are the same as encircled numbers shown on figures.

2/ See applicable figure or table listed in remarks column for part numbers and dimensions.

3/ Quantity is for one complete assembly of each size.

4/ Nitrile (Buna N); Parker Hannifin Corporation (part number N0756-75), O-ring Division, 2360 Palumbo Drive, Lexington, KY 40509, CAGE 02697, or equal.

5/ Arco Set 200, M.M. Reif Co., Ivyland, PA, or PR610-TCF (Chockfast Orange), ITW Philadelphia Resins Corp., Montgomeryville, PA, or equal.

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Preparing activity:
Navy – SH
(Project 5935-2011-075)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.