MIL-C-24231/27D(SHIPS)
30 August 1976
SUPERSEDING
MIL-C-24231/27C(SHIPS)
11 May 1970


(D)

MILITARY SPECIFICATION SHEET

CONNECTOR, RECEPTACLE, MULTI-PIN, FOR TYPE 2SWF CABLES

(D) This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Deparments and Agencies of the Department of the Defense.

The complete requirements for procuring the multi-pin receptacle described herein shall consist of this document and the latest issue of MIL-C-24231(SHIPS).

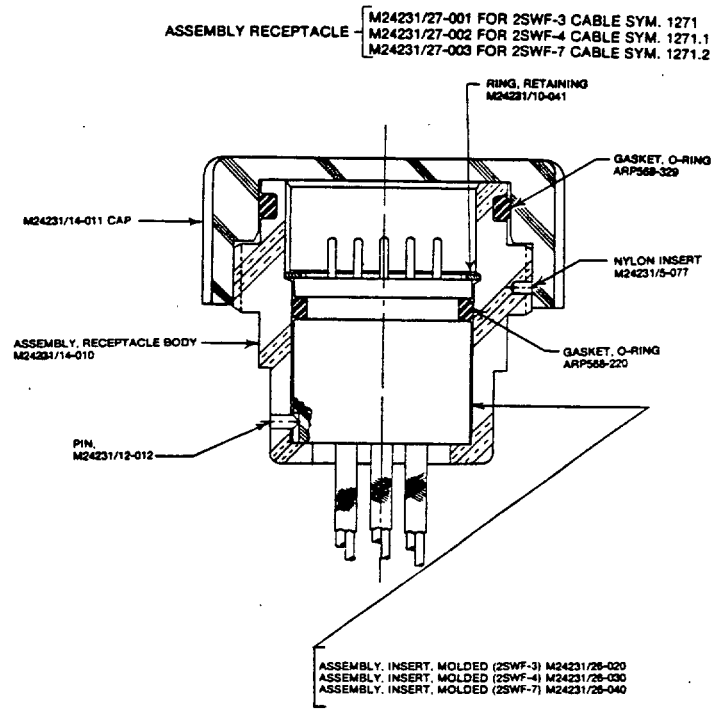

ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±1/64 INCH FOR FRACTIONS AND ±0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE IS ±1/2 DEGREE.

SH9694

(D) Denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figure.
(D) 2. Material for receptacle body shall be manufactured from nickel-copper alloy, class A, form 1, hot finished in accordance with QQ-N-281 with a minimum yield strength of 40,000 lbf/in^2 at 0.2 percent offset, or nickel-copper alloy in accordance with class A, form 1, cold drawn, in accordance with QQ-N-281 with a minimum yield strength of 50,000 lbf/in^2 at 0.2 percent offset.
(D) 3. Type 2SWF cables shall be in accordance with MIL-C-915/48.

Preparing activity:
Navy - SH
(Project 5935-N842-27)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.