(A)


MILITARY SPECIFICATION SHEET

CONNECTOR, PLUG, FOR HULL INSERTS

(A) This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the hull insert plugs described herein shall consist of this document and the latest issue of MIL-C-24231(SHIPS).

ASSEMBLY, PLUGS FOR HULL INSERTS: M24231/28-001, M24231/28-002 AND M24231/28-003

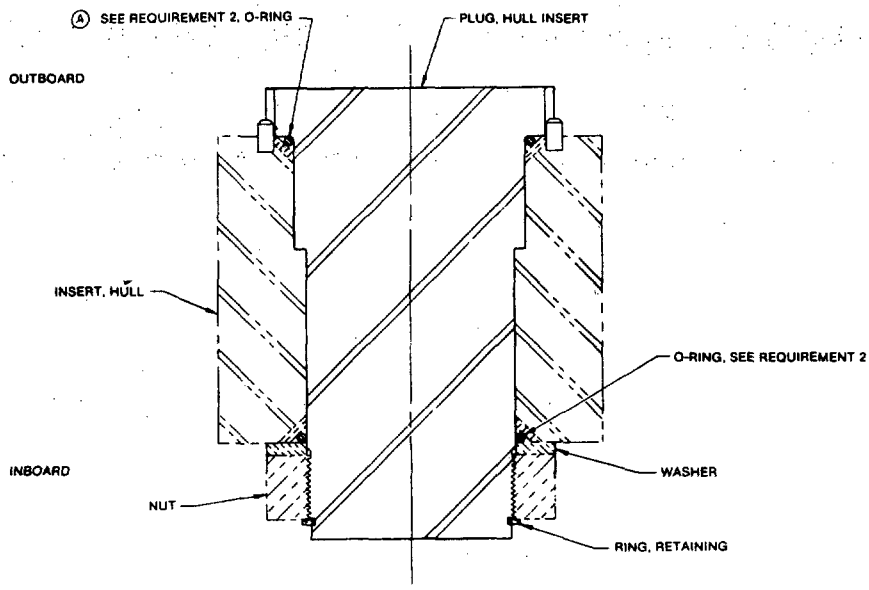


PARTS LIST FOR HULL INSERT PLUG ASSEMBLIES

INSERT PLUG ASSY	NUMBER REQUIRED - ONE						FOR HULL INSERT
	INSERT PLUG	RETAINING RING	NUT	WASHER	O-RING OUTBOARD	O-RING INBOARD	
M24231/28-001	M24231/28-010	M24231/5-076	M24231/5-074	M24231/5-075	ARP568-329	ARP568-327	M24231/25-001
M24231/28-002	M24231/28-020	M24231/10-045	M24231/10-042	M24231/10-043	ARP568-334	ARP568-332	M24231/25-002
M24231/28-003	M24231/28-030	M24231/19-014	M24231/19-024	M24231/19-025	ARP568-342	ARP568-339	M24231/25-003

(A) Denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.

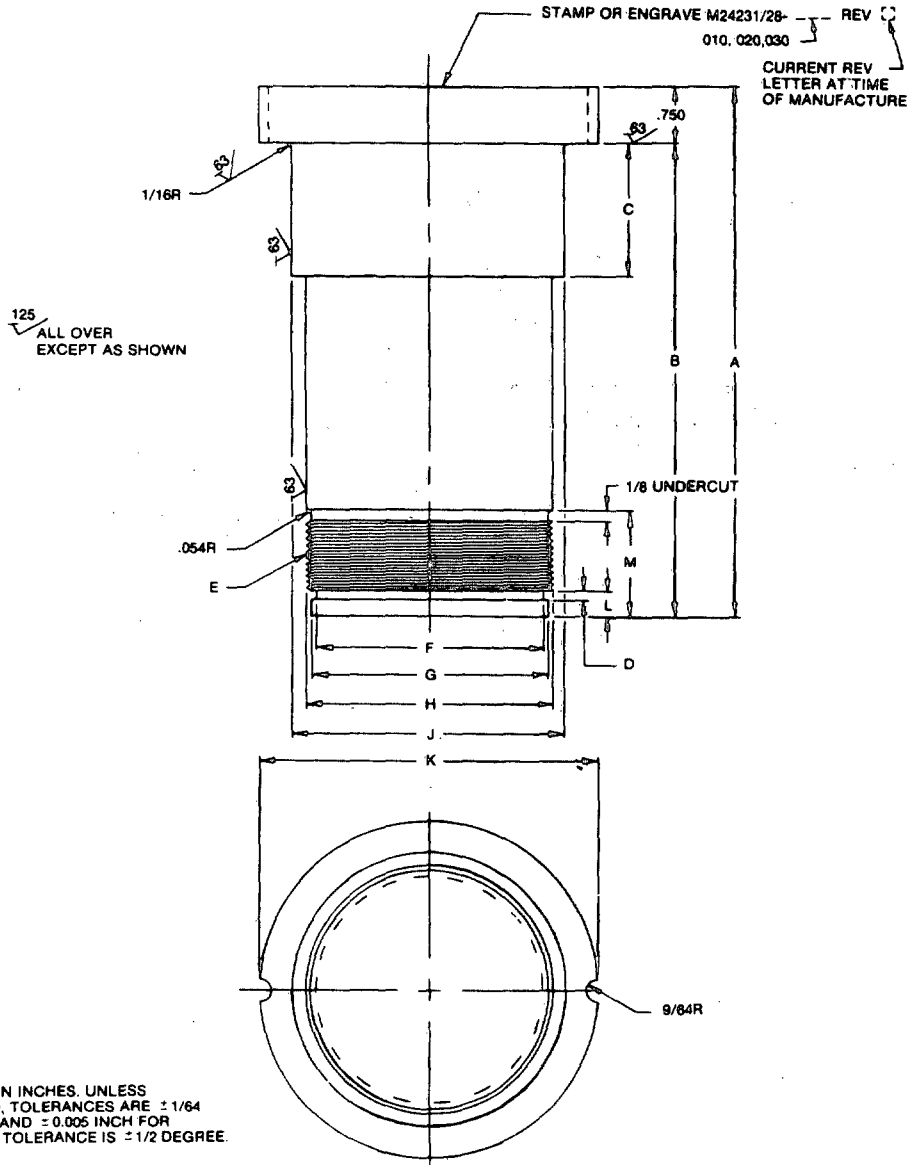

ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±1/64 INCH FOR FRACTIONS AND ±0.005 INCH FOR DECIMALS. ANGULAR TOLERANCE IS ±1/2 DEGREE.

PLUG, HULL INSERT

HULL INSERT PLUG - TABLE OF DIMENSIONS												
PLUG PC NO.	A	B	C	D +.005 -.000	E	F	G	H +.000 -.005	J	K	L	M
M24231/28-010	6.625	5.875	2.219	.068	1-3/4 - 12UN-2A	1.550	1.625	1.750	2.000	2-3/4	.185	1-5/16
M24231/28-020	7.125	6.375	2.469	.086	2-3/8 - 12UN-2A	2.145	2.250	2.375	2.625	3-3/8	.185	1-5/16
M24231/28-030	7.000	6.250	1.721	.103	3-1/4 - 12UN-2A	2.980	3.125	3.250	3.605	4-1/2	.291	1-13/32

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figures.
2. When hull insert plug is installed in hull insert during welding procedure, use silicone 'O' rings in accordance with ZZ-R-765, Class 2b, 50 durometer.

A 3. Manufacturing activity has the option to machine the nut, washer and hull insert plug from any age-hardened ni-cu-al alloy in accordance with class A of QQ-N-286 that will meet the physical requirements of paragraph 3.3.2 of MIL-C-24231. In that case, the chemical and physical certification obtained from the supplier of the ni-cu-al alloy will satisfy certification requirements when supplemented by the required traceability markings identifying the finished product to the bar stock on which the chemical and physical analysis was performed.

Preparing activity:
Navy - SH
(Project 5935-N842-28)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.