MIL-C-24231/28B(SH)
15 May 1987
SUPERSEDING
MIL-C-24231/28A(SHIPS)
30 August 1976
(See note 3)

MILITARY SPECIFICATION SHEET

CONNECTOR, PLUG, FOR HULL INSERTS, TYPE VI


This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the hull insert plugs described herein shall consist of this specification and the latest issue of MIL-C-24231.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 202640-19T20:19Z
Check the source to verify that this is the current version before use.

ASSEMBLY PLUGS FOR HULL INSERTS M24231/28-001
M24231/28-002 AND M24231/28-003

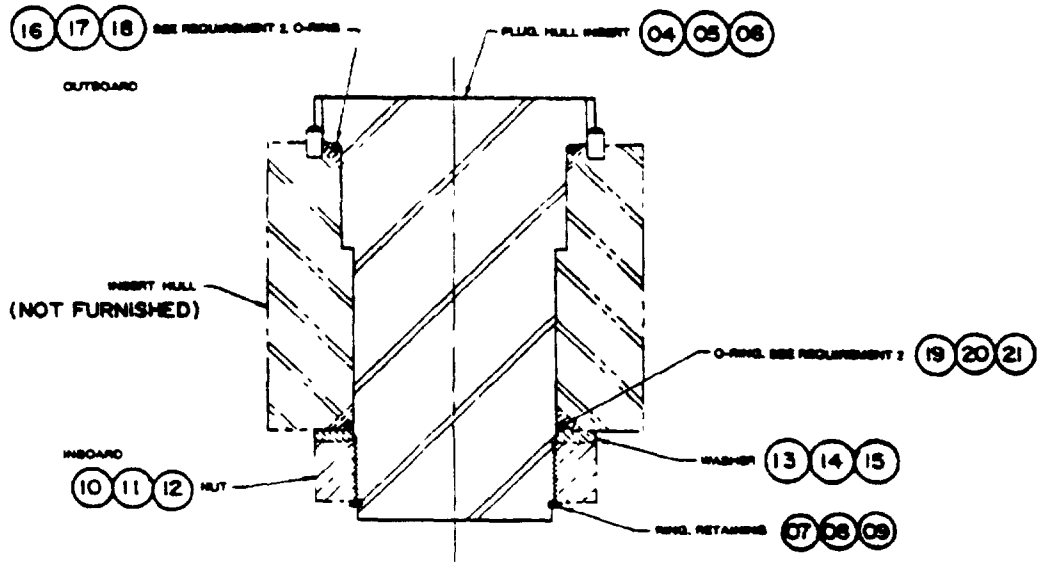


PARTS LIST FOR HULL INSERT PLUG ASSEMBLIES

INSERT PLUG ASSY	NUMBER REQUIRED ONE						
	INSERT PLUG	RETAINING RING	NUT	WASHER	O-RING OUTBOARD	O-RING INBOARD	FOR HULL INSERT
M24231/28-001	M24231/28-016	M24231/6-075	M24231/6-074	M24231/6-073	AR568-339	AR568-327	M24231/28-001
M24231/28-002	M24231/28-009	M24231/10-045	M24231/10-042	M24231/10-043	AR568-334	AR568-328	M24231/28-002
M24231/28-003	M24231/28-008	M24231/10-014	M24231/10-004	M24231/10-005	AR568-342	AR568-330	M24231/28-003

SH 1320150

FIGURE 1. Plug, assemblies, hull insert.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.

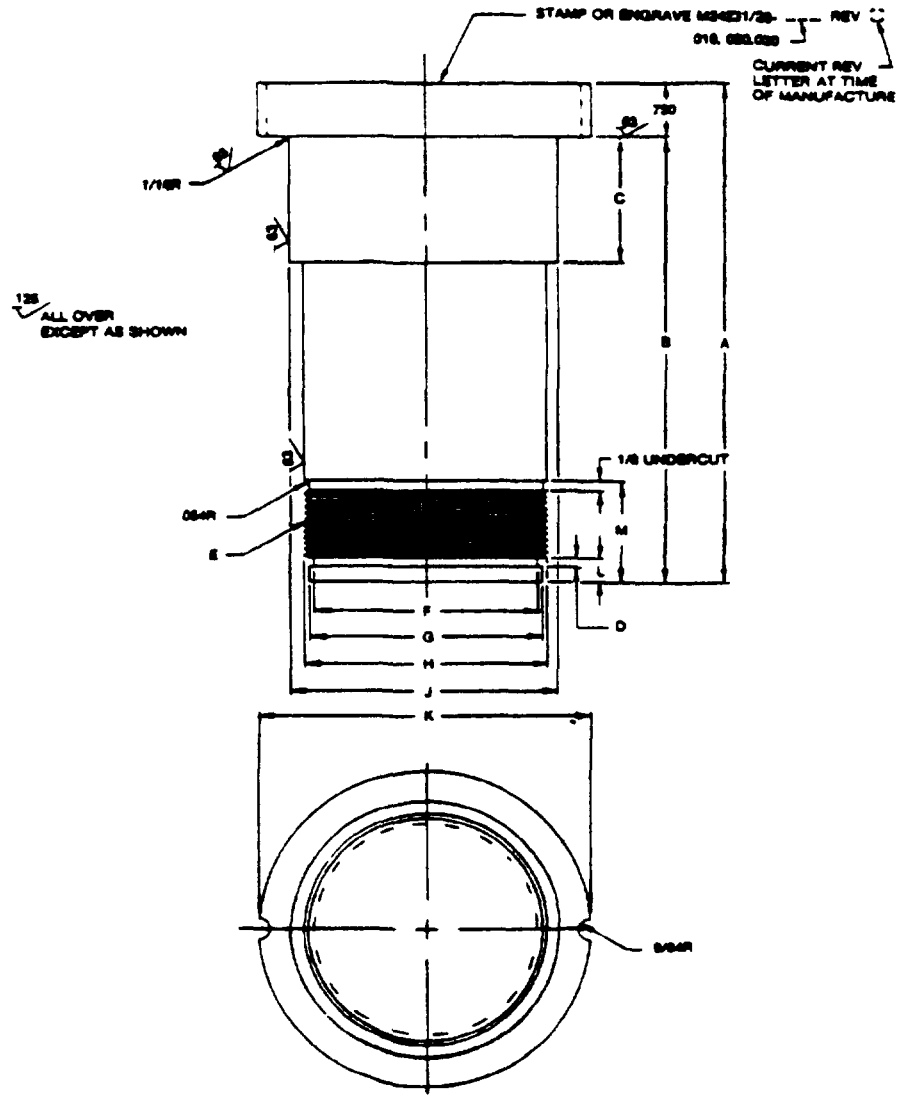

HULL INSERT PLUG - TABLE OF DIMENSIONS												
PLUG PC NO	A	B	C	D +.005 -.000	E	F	G	H +.000 -.005	J	K	L	M
M24231/28-010	6.625	6.875	2.219	.088	1.750 - 12UN-2A	1.880	1.625	1.750	2.000	2-3/4	188	1 5/16
M24231/28-020	7.125	6.375	2.469	.088	2.375 12UN-2A	2.145	2.250	2.375	2.625	3-3/8	188	1 5/16
M24231/28-030	7.000	6.250	1.721	.100	3.250 - 12UN-2A	2.880	3.135	3.250	3.500	4 1/2	.281	1-13/32

SH 1320151

FIGURE 2. Plug, hull insert.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration See figures.
2. When hull insert plug is installed in hull insert during welding procedure, silicone O-rings in accordance with class 2B, 50 durometer of ZZ-R-765 shall be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item 1/ no.	Description 2/	Quantity for M24231/28- 3/			Material/specification	Remarks
		001	002	003		
01	Insert assembly, plug	1			-----	See figure 1
02	Insert assembly, plug		1		-----	See figure 1
03	Insert assembly, plug			1	-----	See figure 1
04	Insert plug, M24231/28-010	1			Ni-Cu-Al, QQ-N-286	See figure 2
05	Insert plug, M24231/28-020		1		Ni-Cu-Al, QQ-N-286	See figure 2
06	Insert plug, M24231/28-030			1	Ni-Cu-Al, QQ-N-286	See figure 2
07	Ring, retaining	1			M24231/5-076	See figure 1
08	Ring, retaining		1		M24231/10-045	See figure 1
09	Ring, retaining			1	M24231/19-014	See figure 1
10	Nut	1			M24231/5-074	See figure 1
11	Nut		1		M24231/10-042	See figure 1
12	Nut			1	M24231/19-024	See figure 1
13	Washer	1			M24231/5-075	See figure 1
14	Washer		1		M24231/10-043	See figure 1

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list. - Continued

Item 1/ no.	Description 2/	Quantity for M24231/28- 3/ 001	002	003	Material/specification	Remarks
15	Washer			1	M24231/19-025	See figure 1
16	O-ring, outboard	1			MS28775-329	See requirement 2
17	O-ring, outboard		1		MS28775-334	See requirement 2
18	O-ring, outboard			1	MS28775-342	See requirement 2
19	O-ring, inboard	1			MS28775-327	See requirement 2
20	O-ring, inboard		1		MS28775-332	See requirement 2
21	O-ring, inboard			1	MS28775-339	See requirement 2

1/ Item numbers are the same as encircled numbers shown on figures.
2/ See applicable figure or table listed in remarks column for part numbers and dimensions.
3/ Quantity is for one complete assembly of each size.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:19Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Unless otherwise indicated, tolerances shall be as follows:

   (a) Decimals - plus or minus 0.005 inch.
   (b) Fractions - plus or minus 1/64 inch.
   (c) Angular dimensions - plus or minus 1/2 degree.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N279-28)

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:19Z
Check the source to verify that this is the current version before use.