INCH POUND

MIL-C-24231/30(SH)
18 February 1992

MILITARY SPECIFICATION SHEET

CONNECTOR, PLUG, GLASS REINFORCED POLYMER, TYPE I
MOLDED, THREE- AND FOUR-CONDUCTOR

This specification sheet is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-24231.

NOTES:


1. All dimensions are in inches.
2. Unless otherwise indicated, tolerances shall be as follows:


   a. Decimals - plus or minus 0.005 inch.
   b Fractions - plus or minus 1/64 inch.
   c Angular dimensions - plus or minus 1/2 degree.

FIGURE 1. Connector, plug, glass reinforced polymer, molded, three- and four-conductor

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:20Z
Check the source to verify that this is the current version before use.

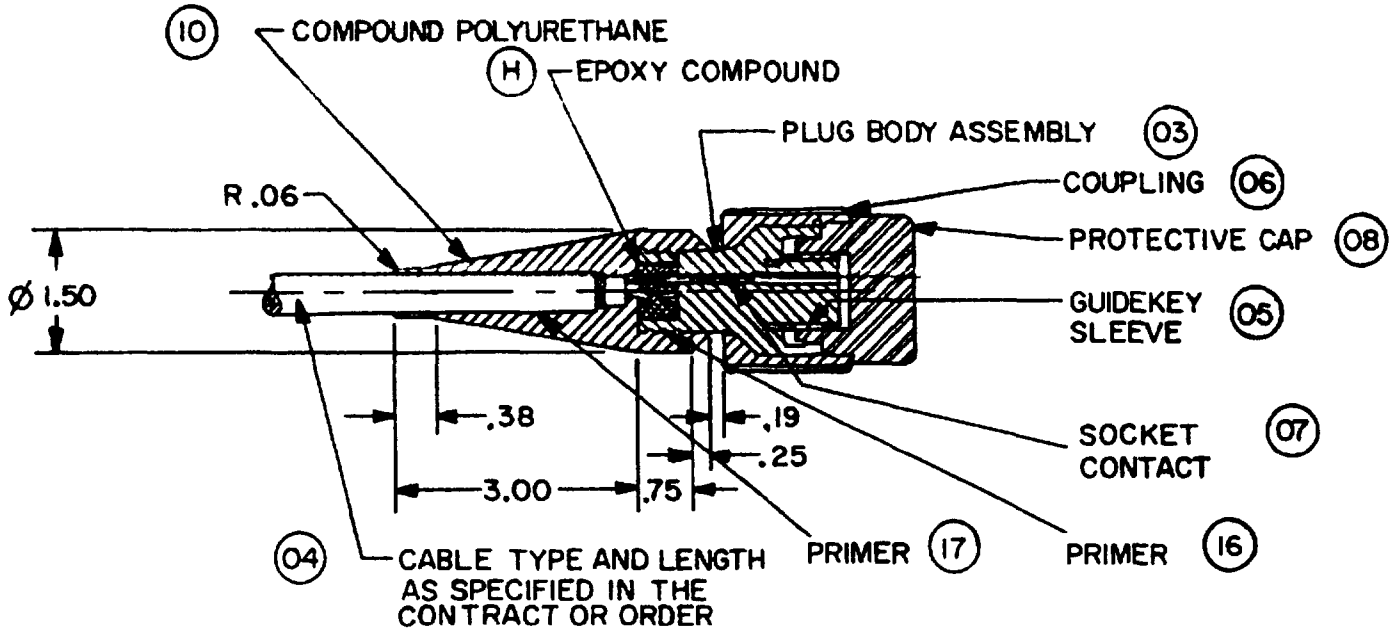

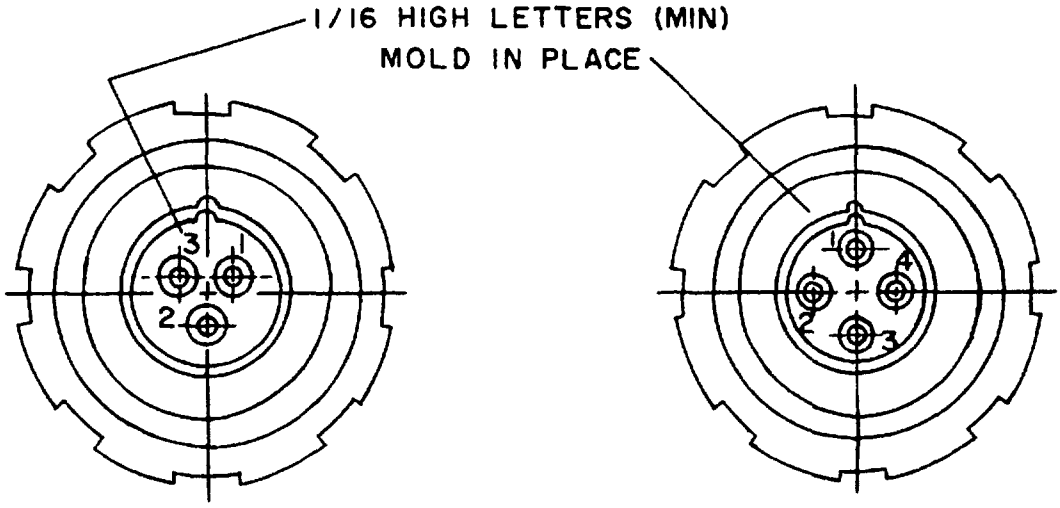

THREE CONDUCTOR PLUG ASSEMBLY
M24231/X-001
01

A

FOUR CONDUCTOR PLUG ASSEMBLY
M24231/X-002
02

B

FIGURE 1 Connector, plug, glass reinforced polymer, molded, three- and four-conductor - cont'd.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:20Z
Check the source to verify that this is the current version before use.

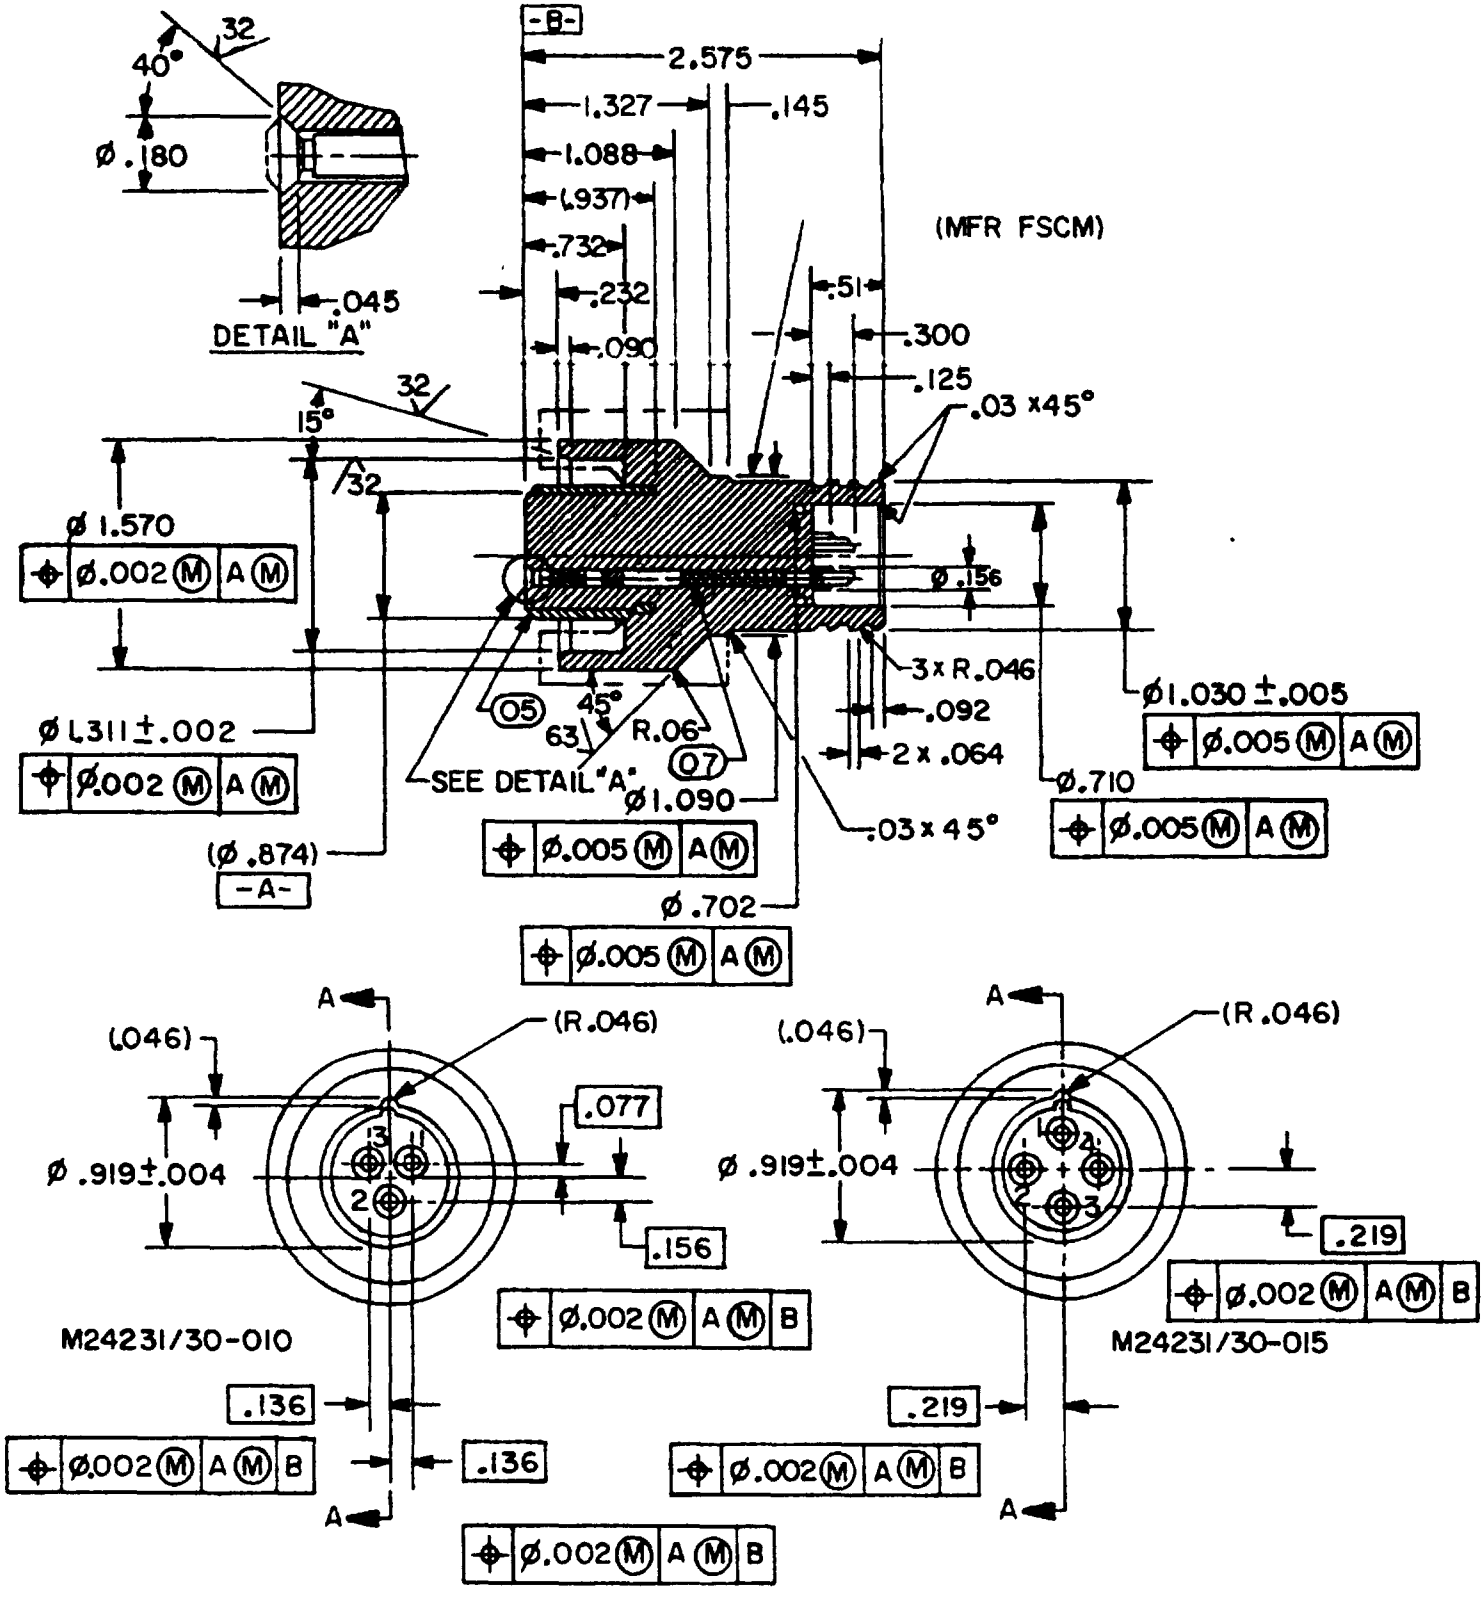


FIGURE 2. Plug body assembly - M24231/30-010 and M24231/30-015

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:20Z
Check the source to verify that this is the current version before use.


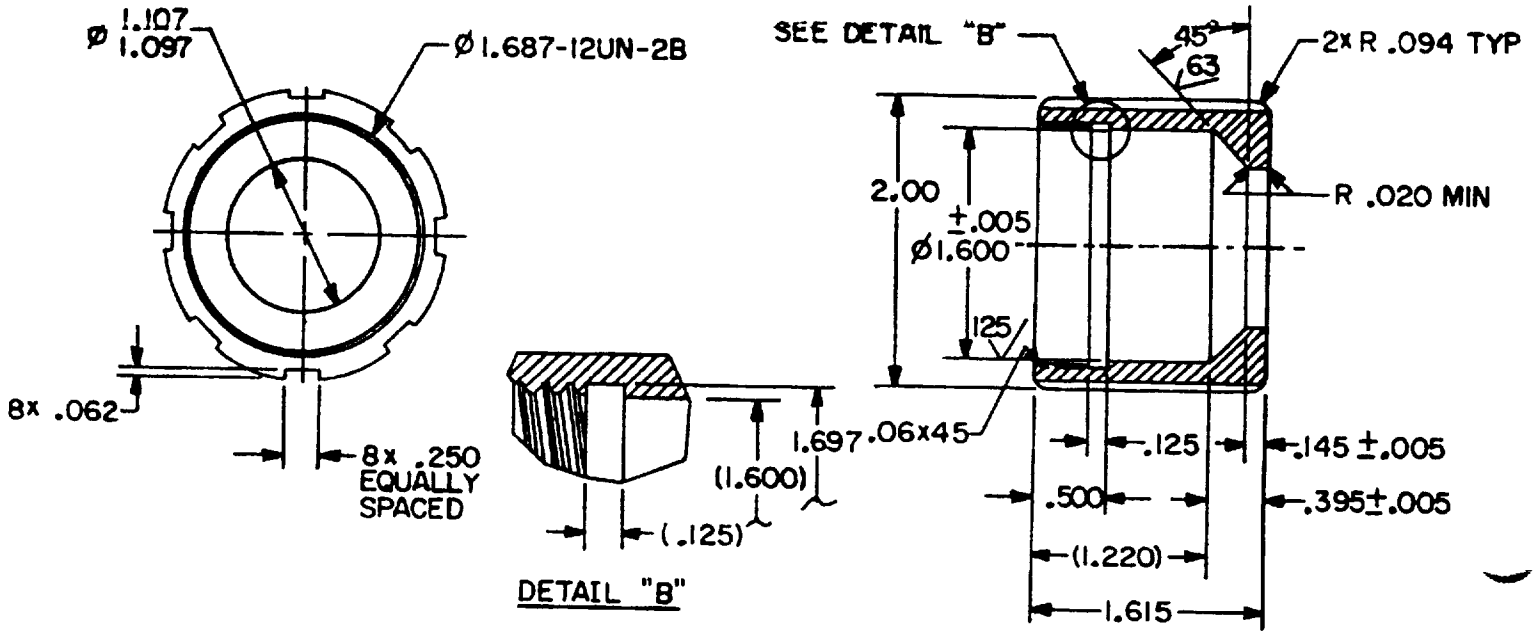


FIGURE 3 Coupling - M24231/30-011

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:20Z
Check the source to verify that this is the current version before use.

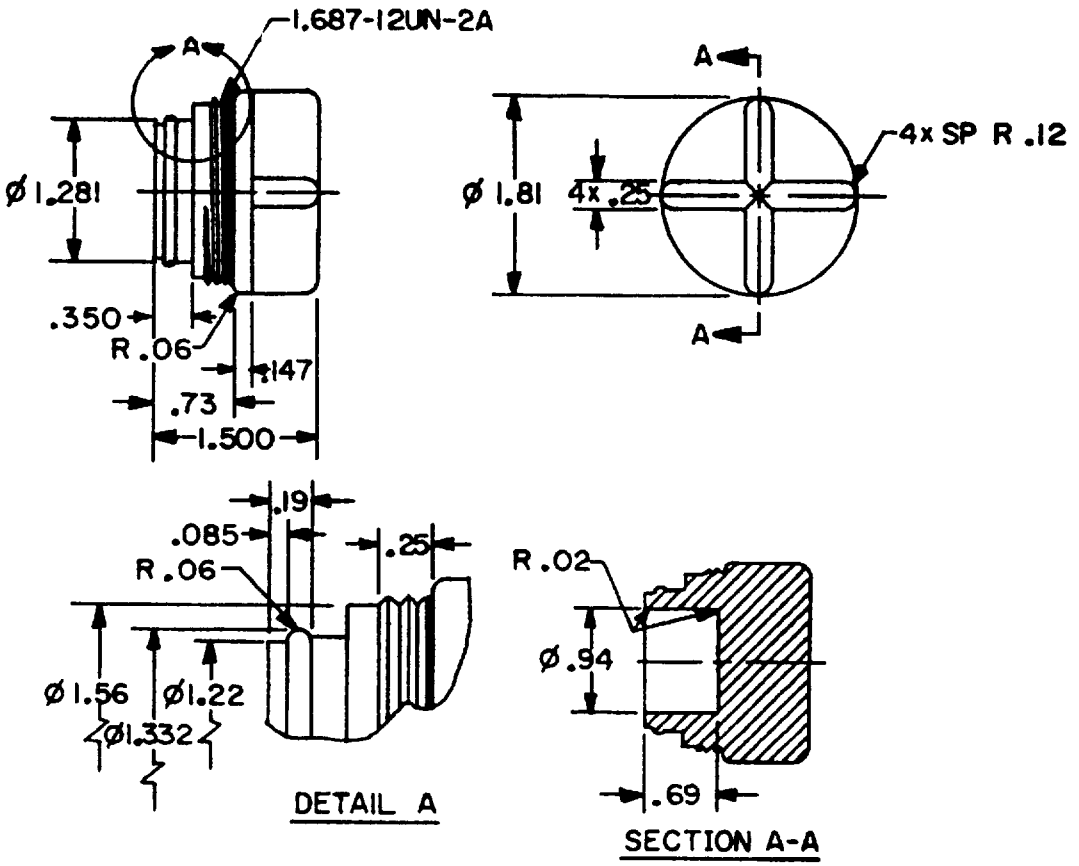

NOTE: Dimensions shown are for mold information only Actual part dimensions may vary based on shrinkage (see table I)

FIGURE 4 Protective cap - M24231/30-012

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:20Z
Check the source to verify that this is the current version before use.

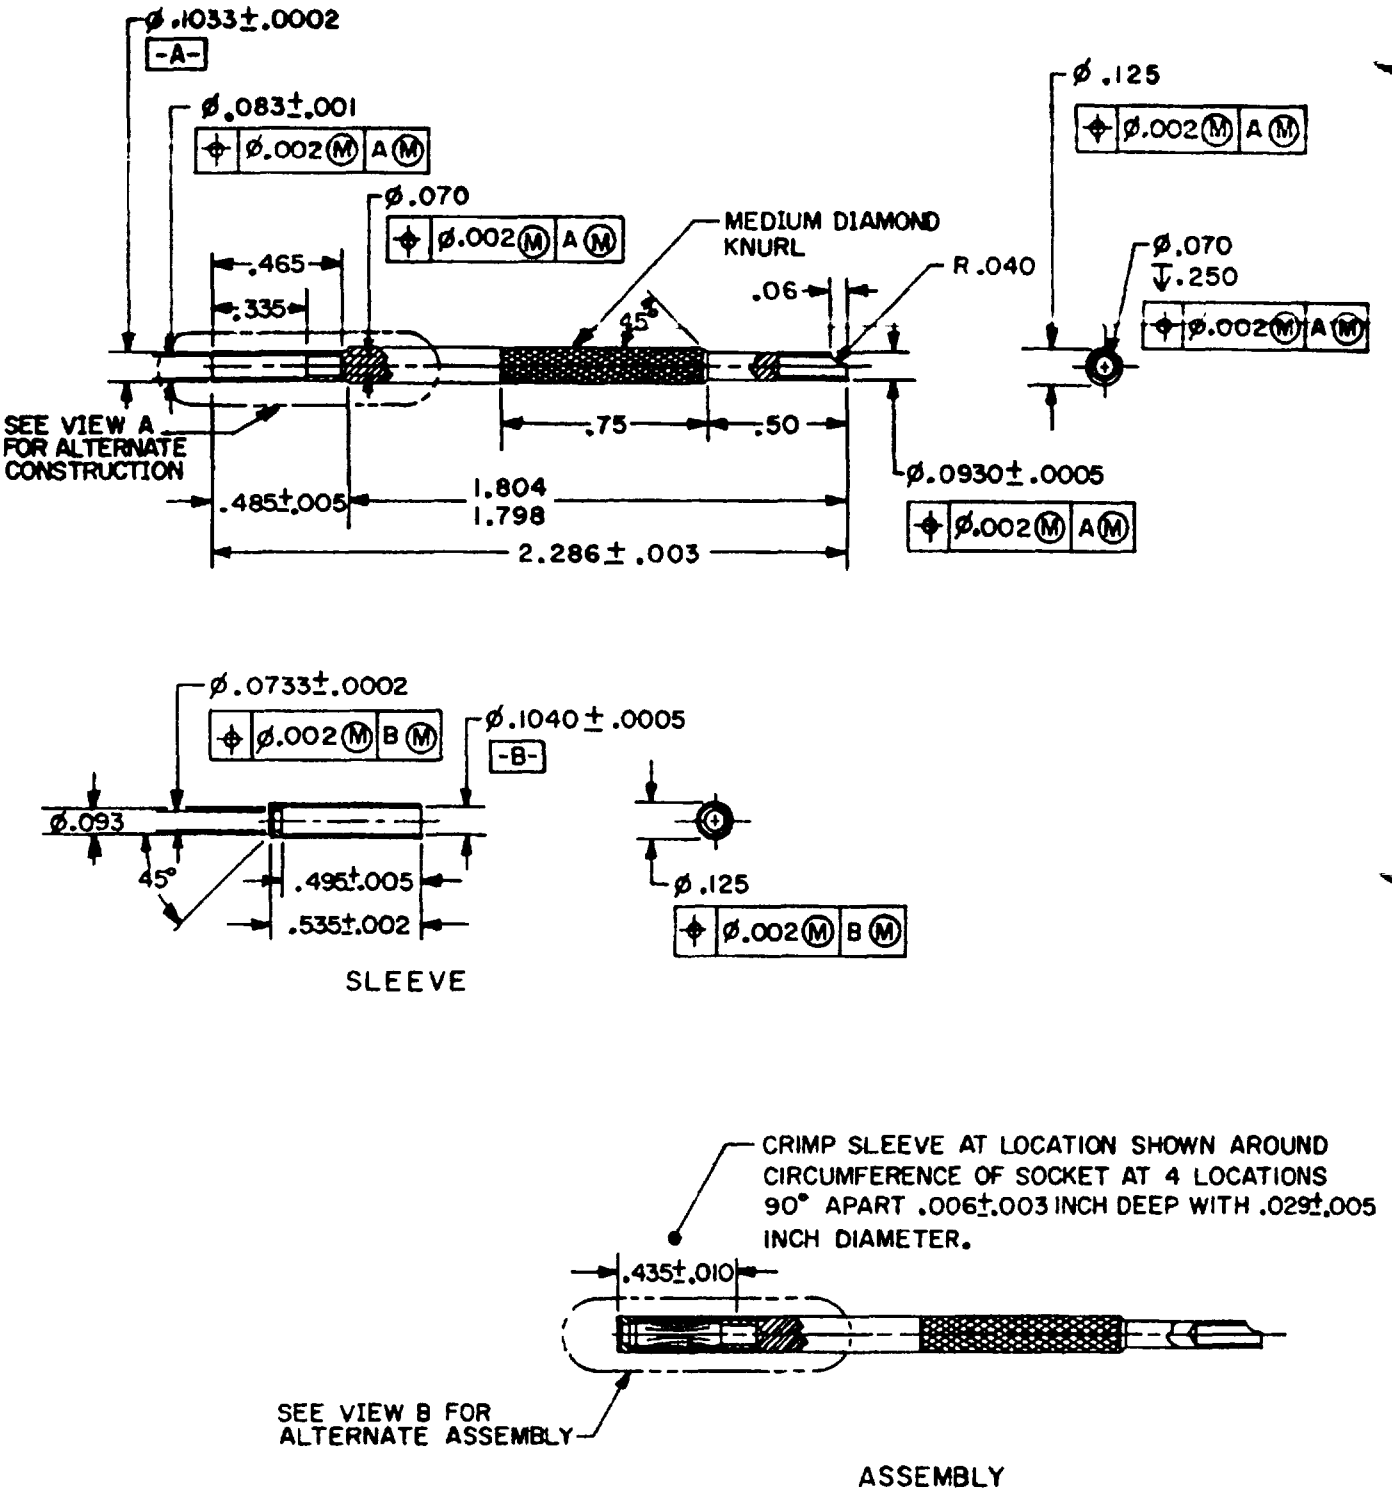


FIGURE 5 Socket contact assembly - M24231/30-030

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:20Z
Check the source to verify that this is the current version before use.

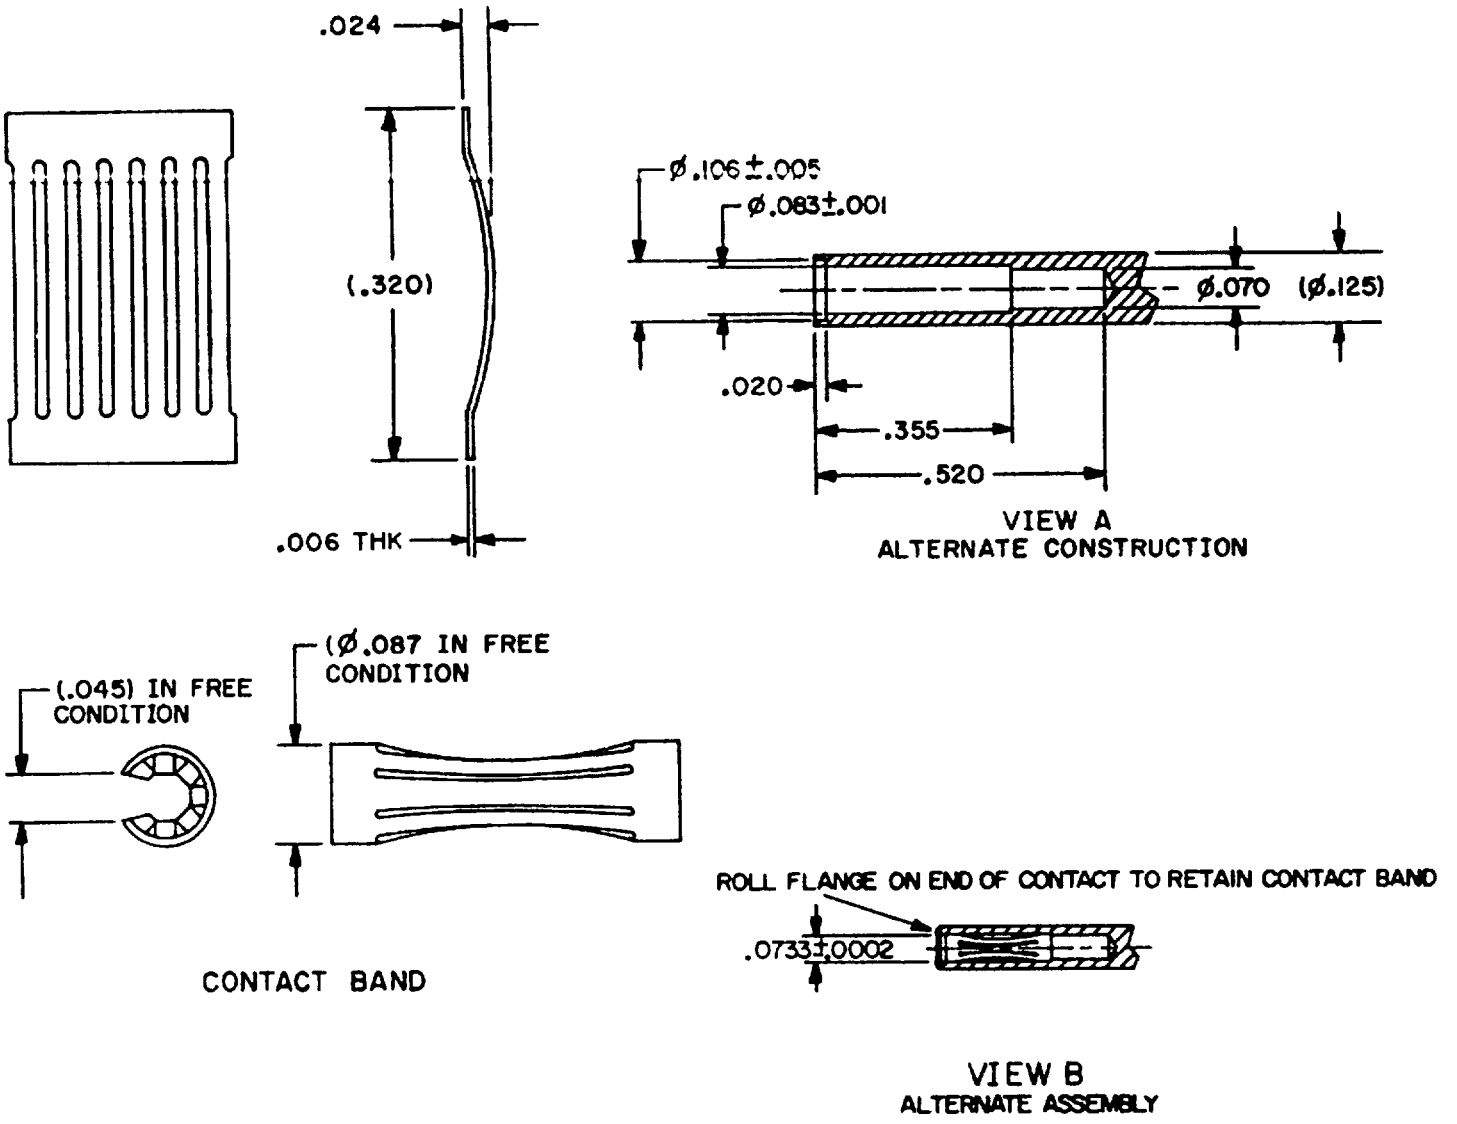


FIGURE 5. Socket contact assembly - M24231/30-030 - Cont'd

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:20Z
Check the source to verify that this is the current version before use.

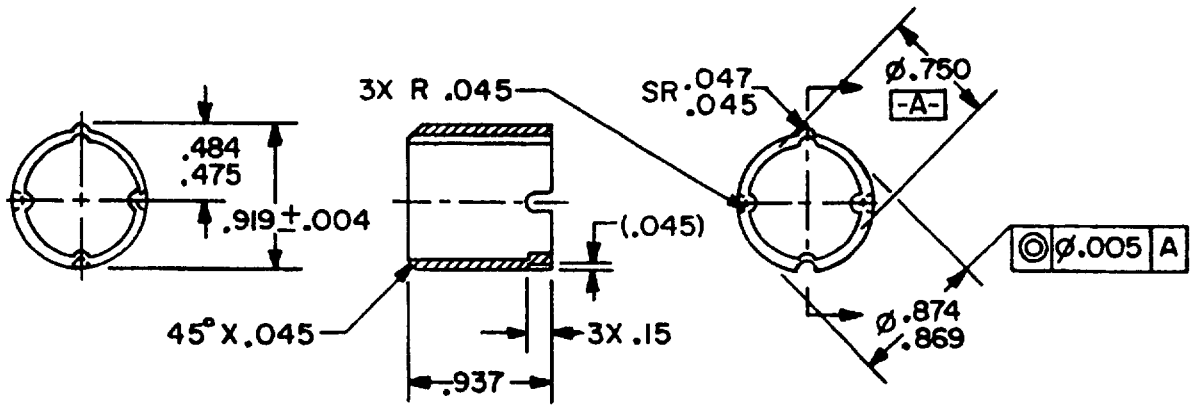


FIGURE 6 Guidekey sleeve - M24231/30-040

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:20Z
Check the source to verify that this is the current version before use.

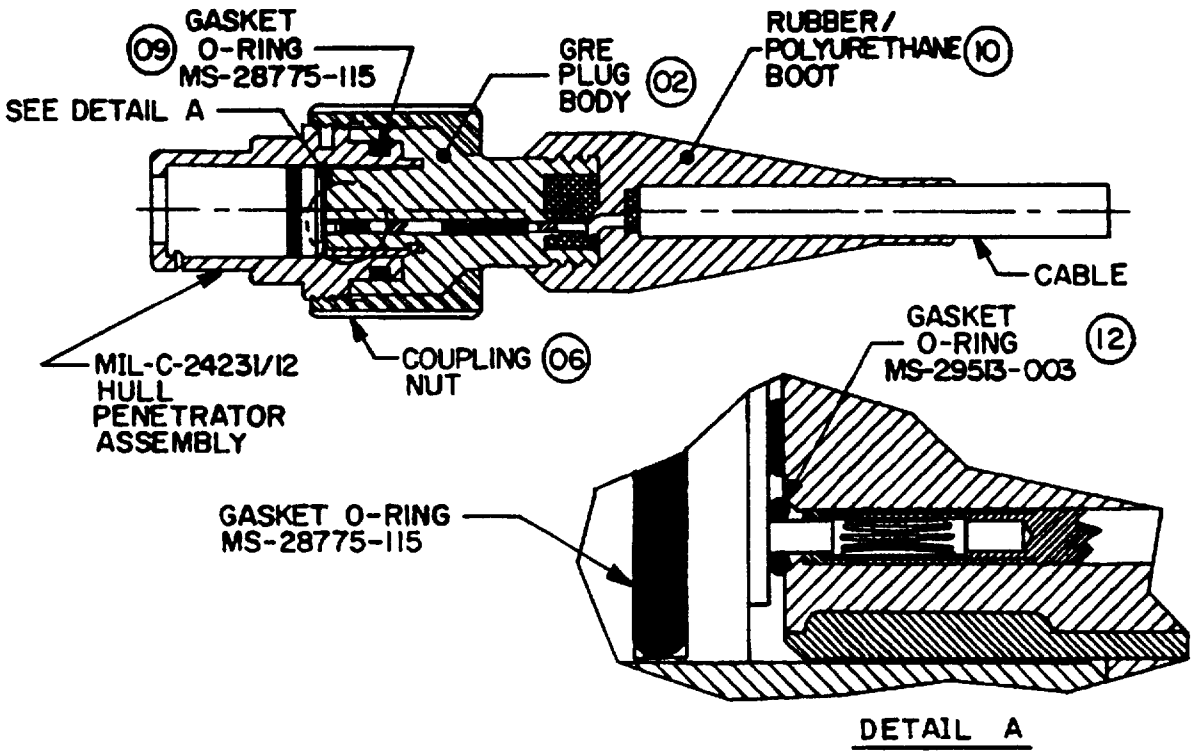


FIGURE 7. Secondary O-ring seal assembly - M24231/30-050

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:20Z
Check the source to verify that this is the current version before use.

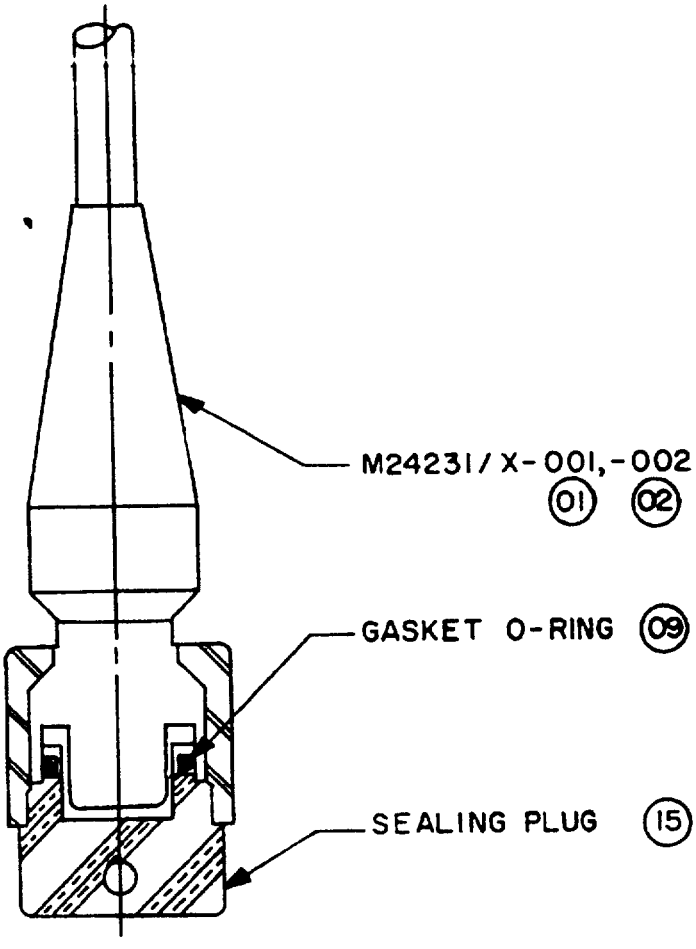


FIGURE 8 Sealing plug assembly - M24231/30-020

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:20Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item 1/ no.	Description 2/	Quantity for M24231/30 3/		Material/specification	Remarks
		001	002		
01	Plug assembly, 3-conductor	1		NAVSEA Dwg. 6548331 4/	See figure 1A
02	Plug assembly, 4-conductor		1	4/	See figure 1B
03	GRE plug body assembly	1	1	NAVSEA Dwg. 6548326 5/	See figure 2
04	Cable	As required		See ordering data	See figure 1
05	Guidekey sleeve	1	1	NAVSEA Dwg. 6548329 Stainless steel, AISI type 316L	See figure 6
06	Coupling	1	1	NAVSEA Dwg. 6548334 Ni-Al-BRZ, QQ-C-465	See figure 3
07	Electrical socket contact assembly	3	4	NAVSEA Dwg. 6546692 Copper alloy 360, QQ-B-626 finish per MIL-G-45204 grade C, class I, Ni under-coat per QQ-N-290 6/	See figure 5
08	Cap, protective	1	1	Neoprene rubber compound ASTM D 2000, 2B3725B14C12EA14 (7%) with 10% teflon powder	Nonpressure-proof, see figure 4, durometer 85 ± 5 when molded, shrinkage 1.2 - 1.3% max.
09	O-ring gasket			M24231/12	Shown for information only.
10	Compound, polyurethane	As required		Category A, type I, MIL-M-24041	See figure 1

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:20Z
Check the source to verify that this is the current version before use.

Table I Parts list - Continued

Item 1/ no.	Description 2/	Quantity for M24231/30 3/		Material/specification	Remarks
		001	002		
11	Compound, epoxy	As required		Cast epoxy resin compound 7/	Base EE4183, hardener HD-3561, see figure 1
12	O-ring gasket	3	4	MS29513-003	Lubricate with silicone compound, MIL-S-8660, see figure 7
13	Secondary O-ring sealing system	1	1	See item 12	See figure 7. Sealing system consists of appropriate number of item 12
14	Sealing plug assembly 3/	1	1	See items 01 and 02, and M24231/1, item 08	Pressure-proof, see figure 8, and figure 2 of M24231/1
15	Sealing plug 3/	1	1	Ni-Cu, class A, QQ-N-281; see M24231/1, figure 2, item 08	Pressure-proof, see figure 8
16	Adhesive primer, rubber-to-plastic	As required		NAVSEA Dwg. 6548333 Adhesive primer, rubber-to-metal, two-part, type I, for polyurethane molding 9/; or rubber to metal primer and adhesive for neoprene 10/	See figure 1

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:20Z
Check the source to verify that this is the current version before use.

Table I. Parts list - Continued.

Item 1/ no.	Description 2/	Quantity for M24231/30 3/	Material/specification	Remarks
17	Adhesive primer, rubber-to-rubber	As required	NAVSEA Dwg. 6548332 Adhesive primer, rubber-to-rubber, one part, type I, for polyurethane 11/; or adhesive, one part, for neoprene 12/	See figure 1

1/ Item numbers are the same as encircled numbers shown on figures.
2/ See applicable figure or table listed in remarks column for part numbers and dimensions
3/ Quantity is for one complete assembly of each size.
4/ To be supplied molded to cable unless otherwise specified (see 6.2.1).
5/ Glass reinforced epoxy (GRE), Fiberite Corp., Winona, MA, part no. E-2748, FSCM 07314.
6/ Electrical socket contact, Hugin Industries, Los Altos, CA part No. 04008, FSCM 1P172.
7/ Hysol Division, Dexter Corp., Olean, NY. Base EE4183, hardener HD-3561, FSCM 04347.
8/ To be supplied when specified (see 6 2.1).
9/ PR-420, Products Research and Chem. Corp., Glendale, CA.
10/ Chemlok 205 primer, Chemlok 234B adhesive, Hughson Chem. Corp., Div. of Lord Corp., Erie PA.
11/ PR-1523M, Products Research and Chem Corp., Glendale, CA.
12/ Chemlok 234B adhesive.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: See figures.
2. See MIL-C-24231, appendix A, 30.5, table XVI

Preparing activity:
Navy - SH
(Project 5935-N402)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:20Z
Check the source to verify that this is the current version before use.