INCH-POUND
A-A-59663A
27 December 2022
SUPERSEDING
A-A-59663
5 June 2001

COMMERCIAL ITEM DESCRIPTION

CHAIN SAW
(PORTABLE, GASOLINE-ENGINE-DRIVEN)

The General Services Administration has authorized the use of this commercial item description for type II, classes A, B, and C of GGG-S-62D by all federal agencies.

1. SCOPE. This commercial item description (CID) covers lightweight, general purpose, and heavy-duty, gasoline-engine-driven, portable chain saws. Each chain saw shall consist of a power unit, controls, power transmission housing, cutter guide bar, cutting chain, chain-adjusting device, oiling device, and operating handles.

2. CLASSIFICATION. The chain saws shall be of the following types:

Type I - Lightweight
Type II - General purpose
Type III - Heavy-duty

3. SALIENT CHARACTERISTICS

3.1 Materials. The chain saw shall be new (not a prototype) and one of the manufacturer's current products capable of use in accordance with the performance requirements specified herein. Materials shall be as specified or when not specified shall be selected by the supplier and shall be subject to all requirements specified.

3.1.1 Material deterioration prevention. The chain saw shall be fabricated from compatible materials, inherently corrosion resistant or be treated to provide protection against the various forms of corrosion and deterioration that it may be exposed in any of the applicable operation and storage environments.

3.1.2 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: Defense Supply Center Richmond (DSCR), ATTN: DSCR-VBD, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610.

AMSC N/A FSC 3695

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

3.2 Physical and performance characteristics. The chain saw shall conform to the physical characteristics of table I.

TABLE I. Physical and performance characteristics.

Physical characteristics	Type I Lightweight	Type II General purpose	Type III Heavy duty
Effective cutting capacity [see 3.2.1]	10 to 18 inches	16 to 24 inches	16 to 47 inches
Weight, maximum [see 3.2.2]	10 .5 pounds	15 pounds	23 pounds
Engine displacement, minimum [see 3.2.3]	2.23 to 2.7 cubic inches	2.97 to 3.9 cubic inches	4.3 to 7.42 cubic inches
Production rate, minimum [see 3.2.4]	200 square feet per hour	300 square feet per hour	450 square feet per hour
Cutter chain efficiency, minimum [see 3.2.5]	300 accumulated square feet	450 accumulated square feet	550 accumulated square feet
Power unit endurance at constant speed with full load, minimum [see 3.2.6]	75 accumulated hours	75 accumulated hours	75 accumulated hours
Power unit endurance at variable speed and load, minimum [see 3.2.7]	75 accumulated hours	75 accumulated hours	75 accumulated hours

3.2.1 Effective cutting capacity. The minimum effective cutting capacity of types I, II, and III chain saws shall be as defined as the minimum circular diameter of logs to be cut. The effective cutting capacity shall be within the ranges shown in table I, or as specified by the procuring activity in the purchase order or contract (see 7.3(b)).

3.2.2 Weight. The maximum empty weight (see table I) of types I, II, and III chain saws shall be the weight of the complete power unit, but not including the weight of the guide bar, chain, spikes, fuel, chain lubricating oil or accessories which are optional or sold separately.

3.2.3 Engine displacement. The minimum engine displacement for types I, II, and III chain saws shall not be less than that shown in table I.

3.2.4 Production rate. Types I, II, and III chain saws shall have production rates not less than the minimum specified in table I, using green oak logs with a density of 64 to 71 pounds per cubic foot. The saw shall be capable of making five complete cutoffs in a selected oak log.

3.2.5 Cutter chain efficiency. The cutter chain shall maintain 50 percent of the initial maximum cutting efficiency after cutting the accumulated minimum square feet, of green oak logs with a density of 64 to 71 pounds per cubic foot, at the rates specified in table 1.

3.2.6 Power unit endurance at constant speed with full load. Types I, II, and III chain saws shall have the capability to operate for the minimum accumulated time shown in table I, at a constant speed with full load. The power unit shall operate for the minimum accumulated time, without causing damage to or permanent deformation of parts or components.

3.2.7 Power unit endurance at variable speed and load. Types I, II, and III chain saws shall have the capability to operate for the minimum accumulated time shown in table I, at variable speed and load. The power unit shall operate for the minimum accumulated time, without causing damage to or permanent deformation of parts or components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

3.3 Power unit. The power unit shall be a lightweight, air-cooled, 2-cycle gasoline engine. The engine shall withstand 75 hours at constant speed at full load (see 3.2.6), or variable speed and load (see 3.2.7). The engine shall develop sufficient power to meet all requirements specified herein, for the applicable type saw, with not more than two spark plug changes or cleanings and two cylinder port cleanings.

3.3.1 Ignition system. The engine ignition system shall be solid state and shall develop sufficient voltage to enable the engine to start and operate under all conditions specified herein. Ignition wiring shall be secured to prevent chafing from vibration or moving parts.

3.3.2 Bearings. The engine crankshaft shall be supported by ball or roller antifriction bearings at each end of the crankshaft. Needle bearings shall be utilized at both the crankpin and piston pin ends of the connecting rod, except sleeve bearings are permitted at the piston pin on type I saws.

3.3.3 Carburetor. The carburetor shall enable the engine to operate in all positions. It shall be equipped with a fuel strainer at the fuel inlet and shall have an adjustable idle jet for adjusting the air-fuel ratio at idle speed. The carburetor air inlet shall be fitted with an air cleaner to prevent the entrance of dirt and dust into the engine. The element shall be accessible and removable without use of special tools and shall not be adversely affected by solvents used for cleaning.

3.3.4 Lubrication. The power unit shall be lubricated by means of a gasoline-oil fuel mixture. The manufacturer's recommended gasoline-oil mixture shall be plainly indicated on the saw.

3.3.5 Cranking system. Cranking shall be accomplished manually by means of an automatic rewind starter. The starter shall incorporate a positive means of engagement. Friction pawls, shoes, or wedges shall not be permitted. The starter shall withstand, without failure, slippage or starter rope breakage during all performance requirements stated herein.

3.3.6 Exhaust system. The exhaust system shall be equipped with a spark-arresting muffler to reduce the exhaust noise and direct the exhaust gases away from the operator. The muffler shall be so located as not to constitute a hazard to the operator. The exhaust system shall meet the requirements of American National Standard Institute (ANSI) B175.1, "Gasoline-Powered Chain Saws - Safety Requirements".

3.3.7 Speed limitation. A governor shall be furnished if required to prevent damage by momentary maximum speed at no load.

3.4 Power-transmission housing. The power-transmission housing shall contain the clutch, driving sprocket, and shall form the cutter guide bar head.

3.4.1 Clutch. The chain saw shall have the cutter chain sprocket directly driven from the engine crankshaft, through a centrifugal clutch. The clutch shall be of the self-energizing friction type. It shall transmit sufficient torque to enable the saw to meet all performance requirements specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

3.4.2 Chain drive sprocket. The chain drive sprocket shall be of an alloy steel and shall be heat treated to a hardness of not less than 54 Rockwell C, and shall withstand the performance testing as specified herein. Sprocket pitch shall match the pitch of the saw chain. The sprocket diameter shall be matched to the guide bar width to provide a smooth chain entry.

3.5 Guide bar. The guide bar shall be grooved and contoured to insure smooth chain travel. The grooves shall be centered throughout the bar length, funneled to permit smooth chain entry, and be of the correct width and depth for the cutter chain furnished. The bar rails shall be heat treated to a hardness of not less than 55 Rockwell C with the remainder of the bar not less than 35 Rockwell C. When laminated bars are furnished, the laminations shall be secured by plug or spot welds, spaced not less than 1 inch on center around the bar rails and nose section and not greater than 1-1/2 inches in the remainder of the bar or by copper braze. Sprocket nose guide bars shall be furnished unless otherwise specified. The sprocket wheels shall be supported by antifriction bearings. The sprocket shall be thin enough to pass through the cut and shall be replaceable without the use of special tools. Bow guide bars or solid nose bars shall be furnished when specified by the procuring activity in the purchase order or contract (see 7.3(c)). The nose shall have a built-up hard surfacing of 0.04-inch minimum thickness.

3.6 Chain-adjusting device. A chain-adjusting device shall be provided, to enable a positive extension of the guide bar for maintaining correct chain tension. The lug shall positively engage the guide bar and shall not become disengaged under any condition of operation as specified herein. The adjusting device shall have sufficient travel to permit removal of the cutter chain from the guide bar without disassembly of the chain or removal of the guide bar.

3.7 Chain oiling system. The saw shall be provided with an automatic chain oiling system and an oil reservoir that shall have sufficient capacity for not less than 15 minutes of sawing operations. The filler-opening cap shall be a spill proof type, plainly marked to indicate chain oil, and be securable against oil loss.

3.8 Fuel tank. The fuel tank shall be corrosion free (treated on the inside to prevent corrosion). The tank shall have sufficient capacity to permit not less than 15 minutes continuous operation at maximum power. Construction and mounting of the fuel tank shall be such that neither vibration nor excessive tightening of the mounting provisions (when used) will cause leaks. The fuel tank shall have a leak proof vent to permit operation of the chain saw in all positions without leakage with the exception that some seepage is acceptable when the saw is in the inverted position. The fill cap shall be secured against loss.

3.9 Enclosures. Enclosures with integral reservoirs of lubricant shall be equipped with a means for filling the enclosure with lubricant. Enclosures filled with lubricant shall not permit loss of lubricant with the chain saws in any orientation. Accessibility to the filler shall be obtained without the removal or adjustment of parts or accessories.

3.10 Controls. The chain saw shall be equipped with a throttle control, choke control or engine primer, and an ignition switch. The throttle control shall be located in the rear handle, and operable without the operator removing his hands from the saw handles, engine revolutions per minute (RPM) shall return to idle when throttle released. The choke control shall be clearly and permanently marked to indicate the choke position. The ignition switch shall be so located that it

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

can be moved to the "OFF" position by the operator, without removal of the hands from the handles. The "OFF" position shall be clearly and permanently marked.

3.11 Cutter chain. The saw shall be equipped with a cutter chain of low kickback design that will meet the requirements of ANSI B175.1. Failure to meet the requirements of ANSI B175.1 shall constitute a failure to meet this performance requirement. The chain saw shall permit sharpening with a straight round file without removal from the guide bar. The cutter teeth, tie bars, and drive tangs shall be heat-treated to a hardness of not less than 49 Rockwell C. The cutter teeth shall have hard chromium plating conforming to Society of Automotive Engineers (SAE) AMS2460A, “Plating, Chromium”, class 2, when specified by the procuring activity in the purchase order or contract (see 7.3(d)).

3.12 Bumper spike. The saw shall have a tooth constructed device (bumper spike) that extends below the lower edge of the cutting chain and affords a no slip grip against the log.

3.13 Handles, hand guards, and chain brake. The saw shall be equipped with anti-vibration handles, hand guards, and a chain brake that meet the requirements of ANSI B175.1. Failure to meet the requirements of ANSI B175.1 shall constitute a failure to meet this performance requirement. The shock absorbers in the anti-vibration handles shall be replaceable.

3.14 Safety. Guards, switches, controls and other appropriate protection shall be provided for the operator in accordance with all applicable Federal Occupational Safety and Health Administration Standards.

3.15 Noise limits. The noise limit produced by the chain saw while under full operating load and other appropriate protection provided to the operator shall conform to all applicable Federal Occupational Safety and Health Standards. Provisions of MIL-STD-1474, "Noise Limits", shall be provided as requirements for the protection of the operator when specified by the procuring activity in the purchase order or contract (see 7.3(e)).

3.16 Ease of maintenance. All major assemblies and installed attachments shall be accessible for maintenance, repair, and replacement.

3.17 Identification marking. The saw shall be legibly and durably marked. Military identification markings shall comply with MIL-STD-130, "Identification Marking of U.S. Military Property", when specified by the procuring activity in the purchase order or contract (see 7.3(f)).

3.18 Treatment and painting. The chain saw, components, and accessories shall be cleaned, treated for preservation, and painted in accordance with the supplier's best standard practice in support of all requirements herein.

3.19 Operating, maintenance, and safety instructions. Operating, maintenance, and safety instructions shall be included with each saw.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

3.20 Accessory kit. Each chain saw shall be furnished with an accessory kit designated as level I or level II when specified by the procuring activity in the purchase order or contract (see 7.3(g)). Levels I and II shall consist of items as follows:

LEVEL I

1	Combination screwdriver, spark plug and bar nut wrench.
2	Chain saw of the proper diameter for the chain pitch furnished
1	File guide.
1	Spark plug.
1	Scabbard.
1	Spare chain of same type as furnished with the saw.

LEVEL II. Includes all LEVEL I items plus additional items as follows:

1	Chain repair kit.
1	Pocket chain breaker.
1	Plastic buckling wedge (approx. 5-1/4 inches long).
1	Plastic falling wedge (approx. 8 inches long).
2	Bar and chain oil (quarts).
2	Two-cycle oil (quarts).

3.21 Workmanship. The saw shall be free of defects in appearance, construction, and workmanship as determined by visual examination.

3.22 Chest. The chain saw with all tools and repair parts shall be enclosed in a chest when specified by the procuring activity in the purchase order or contract (see 7.3(h)). The chest shall hold the contents in place during transit and shall withstand multiple free fall drops of at least 24 inches that include drops on all surfaces and corners. A saw equipped with quick disconnects between the power unit and the saw attachment shall be placed in the chest in a knockdown position. Damage to the components within the chest or any loosening, breakage, displacement to any blocking, bracing, or anchoring shall constitute failure to meet this requirement.

3.23 Lubricating gun. A lubricating gun shall be supplied with the saw to lubricate the sprocket when specified by the procuring activity in the purchase order or contract (see 7.3(i)).

3.24 Fuel can. A 2-1/2-gallon fuel can shall be provided with each saw when specified by the procuring activity in the purchase order or contract (see 7.3(j)). The fuel can shall be equipped with a self-storing, flexible pour spout with strainer. The spout diameter shall be small enough too fit inside the fuel tank fill opening. The fill cap shall incorporate a graduated container to enable accurate measurement of oil for the manufacturer's recommended gasoline-oil mixture.

4. REGULATORY REQUIREMENTS

4.1 Health, safety, and environment. The saw, components, and accessories shall adhere to all Federal, state, and local health, safety, and environmental regulations. No environmentally prohibited material or components shall be used in manufacturing, finishing, or packaging the product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

4.2 Recycled materials. The supplier or contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS


5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

5.2 Warranty. The supplier shall provide commercially available warranties that are customary for the saw provided, or as specified by the procuring activity in the purchase order or contract (see 7.3(k)).

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order (see 7.3(l)).

7. NOTES

7.1 Part or identification number (PIN). The following PIN procedure is for Government purposes and does not constitute a requirement for the provider.

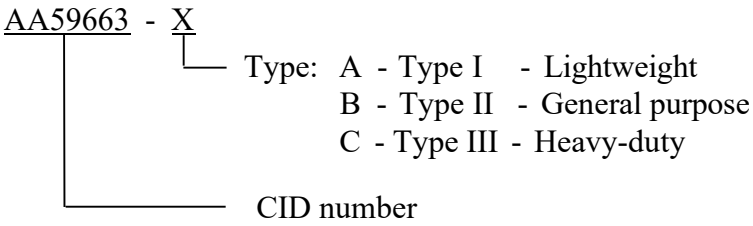

7.2 Sources of documents.

7.2.1 Government documents. Copies of FAR, military and federal standards may be obtained from the U.S. Government Printing Office, Superintendent of Documents, Mail Stop: SSOP, Washington, DC 20402-9328. Electronic copies of military and federal standards may be obtained from https://quicksearch.dla.mil.

7.2.2 ANSI standards. Copies of ANSI standards may be obtained from the American National Standards Institute, 11 West 42nd Street, New York, NY 10036 or https://ansi.org.

7.2.3 ASTM standards. Copies of ASTM standards may be obtained from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959 or https://www.astm.org.

7.2.4 SAE standards. Copies of SAE standards may be obtained from Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096-0001 or https://www.sae.org.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

7.3 Ordering data. Acquisition documents should specify the following:

a. CID document number, revision, and CID PIN.
b. Effective cutting capacity (see 3.2.1).
c. Guide bars (see 3.5).
d. Cutter chain (see 3.11).
e. Noise limits (see 3.15).
f. Identification marking (see 3.17).
g. Accessory kit (see 3.20).
h. Chest (see 3.22).
i. Lubricating gun (see 3.23).
j. Fuel can (see 3.24).
k. Warranty (5.2).
l. Packaging requirements (see 6).

7.4 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of FED-STD-376, "Preferred Metric Units for General Use", or as agreed to by the procuring activity.

7.5 Changes from previous issue. The margins of this standard are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD
Air Force - 99
DLA - GS

Reviewers:
Army - CR, GL, MD
Navy - MC

CIVIL AGENCY
COORDINATING ACTIVITY:

GSA - 7FXE

Preparing activity:
DLA - GS6

(Project 3695-2023-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.