[INCH-POUND]
A-A-59714/3C
2 September 2025
SUPERSEDING
A-A-59714/3B
5 October 2020

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

RESISTOR, THERMAL, NON-LINEAR THERMISTOR (RESETTABLE FUSE) RADIAL LEADED, STYLE TR

The General Services Administration has authorized the use of this Commercial Item Description for all federal agencies.

The complete requirements for procuring fixed wirewound power type resistor described herein shall consist of this document and the issue in effect of A-A-59714.

CLASSIFICATION OR PART IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

AA59714	03	-001
CID number	Applicable CID sheet (two digits)	Dash number (see applicable CID sheet)

SALIENT CHARACTERISTICS

Interface and physical dimensions. The resistors supplied to this CID specification sheet shall be as specified herein (see figure 1).

Operating voltage rating. The operating voltage rating shall be as specified in table I.

Hold current. The hold current shall be as specified in table I.

Resistance. The maximum and minimum resistance shall be as specified in table I.

Post trip resistance. The post trip resistance shall be as specified in table I.


Operating ambient temperature. The operating ambient temperature range shall be -40°C to +85°C.


Marking. Thermistors supplied to this CID specification sheet shall be marked as specified in A-A-59714.

Comments, suggestion, or questions on this document should be address to: DLA Land and Maritime, ATTN: VAT, Post Office Box 3990, Columbus, OH 432186-3990, emailed to Resistor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

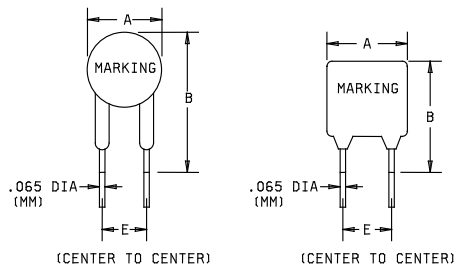



Configuration A Configuration B

Dash number	Dimensions					
	A (max)	B (max)	C (max)	D (min)	E (nom)	Configuration
001	0.189 (4.8)	0.366 (9.3)	0.150 (3.8)	0.185 (4.7)	0.197 (5.0)	A
002	0.228 (5.8)	0.390 (9.9)	0.181 (4.6)	0.100 (2.54)	0.197 (5.0)	A
003	0.210 (5.3)	0.370 (9.4)	0.150 (3.8)	0.185 (4.7)	0.197 (5.0)	A
004	0.236 (6.0)	0.394 (10.0)	0.180 (4.6)	0.185 (4.7)	0.201 (5.1)	B
005	0.236 (6.0)	0.394 (10.0)	0.180 (4.6)	0.185 (4.7)	0.201 (5.1)	B
006	0.256 (6.5)	0.433 (11.0)	0.180 (4.6)	0.185 (4.7)	0.201 (5.1)	B
007	0.256 (6.5)	0.433 (11.0)	0.180 (4.6)	0.185 (4.7)	0.201 (5.1)	B
008	0.256 (6.5)	0.433 (11.0)	0.180 (4.6)	0.185 (4.7)	0.201 (5.1)	B
009	0.256 (6.5)	0.433 (11.0)	0.180 (4.6)	0.185 (4.7)	0.201 (5.1)	B
010	0.236 (6.0)	0.394 (10.0)	0.180 (4.6)	0.185 (4.7)	0.201 (5.1)	B
011	0.256 (6.5)	0.433 (11.0)	0.180 (4.6)	0.185 (4.7)	0.201 (5.1)	B
012	0.256 (6.5)	0.433 (11.0)	0.180 (4.6)	0.185 (4.7)	0.201 (5.1)	B
013	0.410 (10.4)	0.496 (12.6)	0.180 (4.6)	0.185 (4.7)	0.201 (5.1)	B
014	0.531 (13.5)	0.496 (12.6)	0.236 (6.0)	0.185 (4.7)	0.197 (5.0)	B
015	0.531 (13.5)	0.496 (12.6)	0.236 (6.0)	0.185 (4.7)	0.197 (5.0)	B
016	0.531 (13.5)	0.496 (12.6)	0.236 (6.0)	0.185 (4.7)	0.197 (5.0)	B
017	0.531 (13.5)	0.496 (12.6)	0.236 (6.0)	0.185 (4.7)	0.197 (5.0)	B
018	0.630 (16.0)	0.496 (12.6)	0.236 (6.0)	0.185 (4.7)	0.197 (5.0)	B
019	0.630 (16.0)	0.496 (12.6)	0.236 (6.0)	0.130 (3.3)	0.197 (5.0)	B
020	0.630 (16.0)	0.496 (12.6)	0.236 (6.0)	0.130 (3.3)	0.197 (5.0)	B
021	0.228 (5.8)	0.390 (9.9)	0.181 (4.6)	0.185 (4.7)	0.197 (5.0)	A

NOTES:
1. Millimeters are in parenthesis.

FIGURE 1. Case dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

TABLE I. Rating and characteristics.

CID dash number	Hold current (amps)	Voltage (volts) (max)	Current (amps) (max)	Resistance (ohms) (min)	Resistance (ohms) (max)	Post trip resistance (ohms)
001	0.080	250	3	14.0	20	33.0
002	0.080	250	3	15.0	22	33.0
003	0.110	250	3	5.0	9.0	16.0
004	0.120	250	3	6.0	10.0	16.0
005	0.120	250	3	7.0	12.0	16.0
006	0.120	250	3	4.0	8.0	16.0
007	0.120	250	3	6.0	10.5	16.0
008	0.120	250	3	6.0	9.0	16.0
009	0.120	250	3	8.0	10.5	16.0
010	0.145	250	3	3.5	6.5	12.0
011	0.145	250	3	3.0	6.0	14.0
012	0.145	250	3	3.0	5.5	12.0
013	0.180	250	10	0.8	2.0	4.0
014	0.150	600	3	6.0	12.0	22.0
015	0.150	600	3	7.0	10.0	20.0
016	0.150	600	3	9.0	12.0	22.0
017	0.150	600	3	9.0	12.0	22.0
018	0.160	600	3	4.0	10.0	18.0
019	0.160	600	3	4.0	10.0	18.0
020	0.160	600	3	4.0	7.0	18.0
021	0.080	250	3	15.0	22	33.0

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See classification information for PIN format example.

Source of documents.

Commercial Item Description

A-A-59714 - Resistor, Thermal, Non-Linear Thermistor, (Resettable Fuses), General Requirements for.

(Copies of these documents are available online at https://quicksearch.dla.mil/.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown).

MFR's CAGE	MFR's name and address
75915	Littelfuse 6133 North River Road, Suite 500 Rosemont, IL 60018 Ph: 773-628-1000 Website: https://www.littelfuse.com
32997	Bourns, Incorporated Circuit Protection Division 1200 Columbia Avenue Riverside, CA 92507-2129 Phone: 951-781-5500 Ext. 2778 Email: americus@bourns.com Website: https://www.bourns.com

Part number (P/N) supersession data. This CID specification sheet PINs supersedes the following manufacturers P/N as shown in table II. This information is being provided to assist in reducing proliferation in the Government inventory system.

National Stock Number. This section is not applicable to this CID specification sheet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.

TABLE II. P/N supersession data.

CID dash number AA5971403-	MFR's CAGE	MFR's P/N 1/
001		TRF250-080U
002		TRF250-080T-B-1.0-0.125
003		TRF250-110U
004	75915	TRF250-120U
005		
006		TRF250-120
007		TRF250-120T-RF-B-0.5
008		TRF250-120T-R1-B-0.5
009		TRF250-120T-R2-B-0.5
010		
001		
003		
004		MF-RX012/250U
005		MF-RX012/250U-T05
006	32997	MF-RX012/250
007		MF-RX012/250-F05
008		MF-RX012/250-105
009		MF-RX012/250-205
010		MF-RX014/250U
011		MF-RX014/250

CID dash number AA5971403-	MFR's CAGE	MFR's P/N 1/
011		TRF250-145
012		
013		
014	75915	TRF600-150
015		
016		TRF600-150-RB
017		TRF600-150-RB-B-0.5
018		TRF600-160
019		TRF600-160-0.130
020		TRF600-160-RA-B-0.5-0.130
021		TRF250-080T
012		MF-RX014/250-A05
013		MF-RX018/250U
014		
015		
016	32997	
017		
018		
019		
020		
021		

1/ The manufacturers P/N shall not be used for procurement to the requirements of this CID specification sheet, At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see paragraph 3.7 of A-A-59714.

National Stock Number. This section is not applicable to this CID specification sheet.

Changes from previous issue. The margins of this CID specification sheet are marked with a vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FAS

Preparing activity:

DLA - CC

Project 5905-2025-047

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:24Z
Check the source to verify that this is the current version before use.