METRIC

A-A-59760A
7 November 2014
SUPERSEDING
A-A-59760
13 December 2004

COMMERCIAL ITEM DESCRIPTION

TEN-DEGREE XYLENE

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers ten-degree xylene for use in organic coating and rotogravure inks.

2. CLASSIFICATION. The ten-degree xylene shall be classified by size. The selected size of the product to be supplied shall be one of the following sizes as specified in the acquisition order (see 7.3(b)).

Size:
- A - 1-quart can
- B - 1-gallon can
- C - 5-gallon can
- D - 54-gallon drum
- E - 16-ounce or 1 pint can

3. SALIENT CHARACTERISTICS. The ten-degree xylene shall conform to the following physical and chemical characteristics:

3.1 Appearance. The xylene shall be a clear liquid free of sediment or haze at 18.3 °C to 25.6 °C (65 °F to 78 °F) upon visual inspection.

3.2 Color. The xylene shall not be darker than 20 maximum on the platinum-cobalt scale when tested in accordance with ASTM D1209, "Standard Test Method for Color of Clear Liquids (Platinum-Cobalt Scale)" (DoD adopted).

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to DLA Aviation, VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616 or e-mailed to STDZNMGT@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

3.3 Specific gravity. The xylene shall be 0.860 to 0.875 when tested in accordance with ASTM D3505, "Standard Test Method for Density or Relative Density of Pure Liquid Chemicals" (DoD adopted), at 15.56°/15.56 °C.

3.4 Density. The xylene shall be 0.856 g/cm^3 to 0.872 g/cm^3 at 20 °C (68 °F) when tested in accordance with ASTM D3505.

3.5 Distillation. The xylene distillation range at 760 mm Hg pressure shall be as follows when tested in accordance with ASTM D850, "Standard Test Method for Distillation of Industrial Aromatic Hydrocarbons and Related Materials" (DoD adopted), using an ASTM Solvents Distillation Thermometer 41C having a range from 98 °C to 152 °C (208.4 °F to 305.6 °F) and conforming to ASTM E1, "Standard Specification for ASTM Liquid-in-Glass Thermometers" (DoD adopted):

a. Total distillation range shall not be more than 10 °C.
b. Initial distillation temperature (first drop) shall not be below 135 °C (275 °F).
c. Dry point shall not be above 145 °C (293 °F).

3.6 Acid wash color. The xylene acid wash color shall not be darker than number 6 color standard when tested in accordance with ASTM D848, "Standard Test Method for Acid Wash Color of Industrial Aromatic Hydrocarbons" (DoD adopted).

3.7 Acidity. The xylene shall contain no free acid. The xylene shall show no evidence of acidity when tested in accordance with ASTM D847, "Standard Test Method for Acidity of Benzene, Toluene, Xylenes, Solvent Naphthas, and Similar Industrial Aromatic Hydrocarbons" (DoD adopted).

3.8 Sulfur compounds. The xylene shall be free of hydrogen sulfide (H_2S) and sulfur dioxide (SO_2) when tested in accordance with ASTM D4952, "Standard Test Method for Qualitative Analysis for Active Sulfur Species in Fuels and Solvents (Doctor Test)" (DoD adopted).

3.9 Copper corrosion. The copper strip shall not show iridescence nor discoloration beyond 3b of ASTM D849, Table 1 when tested in accordance with ASTM D849, "Standard Test Method for Copper Strip Corrosion by Industrial Aromatic Hydrocarbons" (DoD adopted).

4. REGULATORY REQUIREMENTS

4.1 Labeling, packaging, and marking. Item shall be labeled, packed, and marked in accordance with 49 Code of Federal Regulations (CFR), Parts 100 to 199, unless otherwise specified in the acquisition order (see 7.3.(c)).

4.2 Safety data sheet (SDS). A SDS shall be furnished in accordance with FED-STD-313, "Material Safety Data, Transportation Data and Disposal Data for Hazardous Materials Furnished to Government Activities", and 29 CFR 1910.1200, "Hazard Communication".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

4.3 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

5.2 Market acceptability. The product offered must have been previously sold either to the government or on the commercial market.

6. PACKAGING

6.1 Preservation, packing and marking. Preservation, packing and marking shall be as specified in the acquisition order (see 7.3(c)).

7. NOTES

7.1 Part or identification number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor.

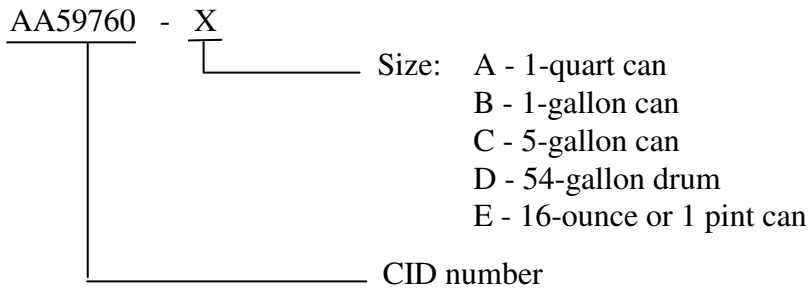

Example of reference part number AA59760-A indicates: Xylene in 1-quart can.

7.2 Sources of documents.

7.2.1 FAR. Copies of the FAR may be obtained from the U.S. Government Printing Office, 732 North Capital Street NW, Washington, DC 20401-0001 or online at www.gpo.gov.

7.2.2 ASTM standards. Copies of ASTM standards may be obtained from ASTM International, 100 Barr Harbor Drive, P.O. Box C700, West Conshohocken, PA 19428-2959. Electronic copies of ASTM standards may be obtained from http://www.astm.org/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

7.3 Ordering data. The acquisition order should specify the following information:

a. CID document number, revision, and CID PIN.
b. Size (see 2).
c. Preservation, packing, and marking.

7.4 National stock numbers (NSNs). The following is a list of NSNs assigned that correspond to this CID. This list may not be indicative of all possible NSNs associated with this document.

NSN	Container size
6810-00-584-4071	1-quart can
6810-00-598-6600	1-gallon can
6810-00-584-4070	5-gallon can
6810-00-290-4166	54-gallon drum
6810-00-257-2479	16-ounce or 1 pint can

MILITARY INTERESTS:

Custodians:
Army - MR
Navy - SH
Air Force - 68
DLA - GS

Review Activities:
Army - CR4, EA, GL
Navy - AS
Air Force - 03

CIVIL AGENCY
COORDINATING ACTIVITY:

GSA – FAS

Preparing Activity:
DLA - GS3
(Project 6810-2014-053)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at http://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.