[INCH-POUND]
A-A-59769/1
15 April 2005

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

RESISTOR NETWORKS, BALL GRID ARRAY TERMINATORS THEVENIN TERMINATION

The General Services Administration has authorized the use of this Commercial Item Description (CID) for all agencies.

The complete requirements for procuring the 8 bit thevenin termination which provides high performance termination and backplanes, and eliminates parasitic capacitance and inductance is described herein and shall consist of this document and the issue in effect of CID A-A-59769.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This CID uses a classification system that is included in the Part Identification Number (PIN) as shown in the following example (see NOTES).

AA59769	01	-001
CID number	Applicable CID sheet (two digits)	Dash number (see table I)

SALIENT CHARACTERISTICS

Interface and physical dimensions. The resistor networks supplied to this CID shall meet the interface and physical dimensions as specified herein (see figure 1).

Schematic diagram. The schematic diagram shall be as specified in figure 2.

Maximum resistor power. The maximum resistor power shall be 0.05 watts at 70°C.

Maximum package power. The maximum package power shall be 1.0 watt at 70°C.

Resistance. The resistance shall be as specified in table I.


Resistance tolerance. The resistance tolerance shall be ±1.0 percent.

Temperature coefficient of resistance (TCR). The temperature coefficient of resistance (TCR) shall be ±200 ppm/°C.

Operating ambient temperature. The operating ambient temperature range shall be -55°C to +125°C.

Marking. Resistors supplied to this CID shall be marked with the manufacturer's standard commercial PIN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

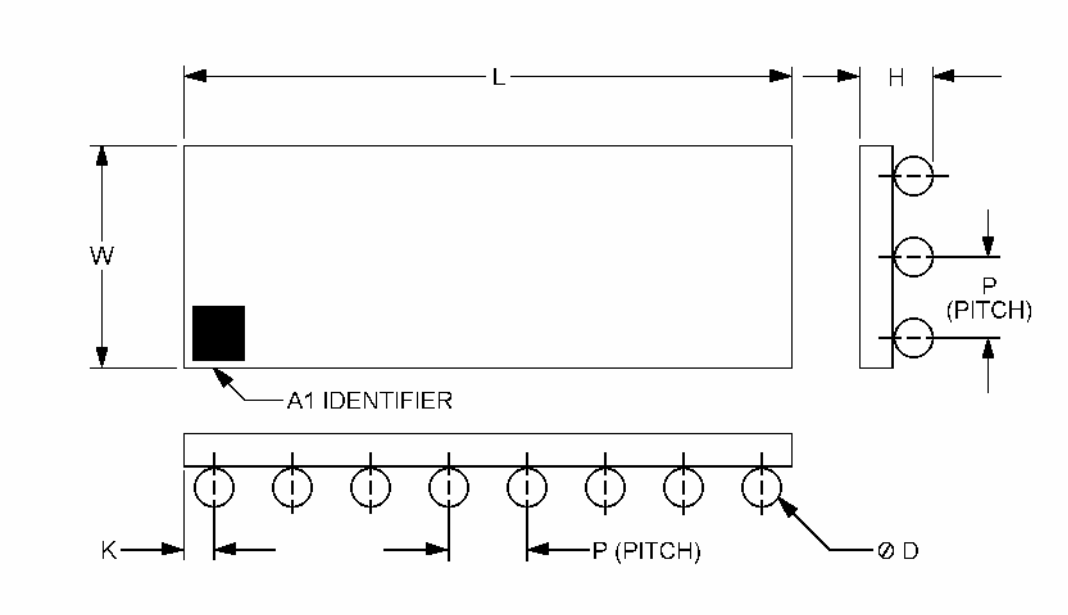

	L	W	H	P
Inch	0.315 ±0.006	0.118 ±0.006	0.047 ±0.006	0.039 ±0.010
mm	8.00 ±0.15	3.00 ±0.15	1.19 ±0.15	1.00 ±0.25
	D	K	Co-planarity	
Inch	0.025 ±0.002	0.020 ±0.010	0.006	
mm	0.64 ±0.05	0.50 ±0.25	0.15	

FIGURE 1. Case dimensions and configuration.

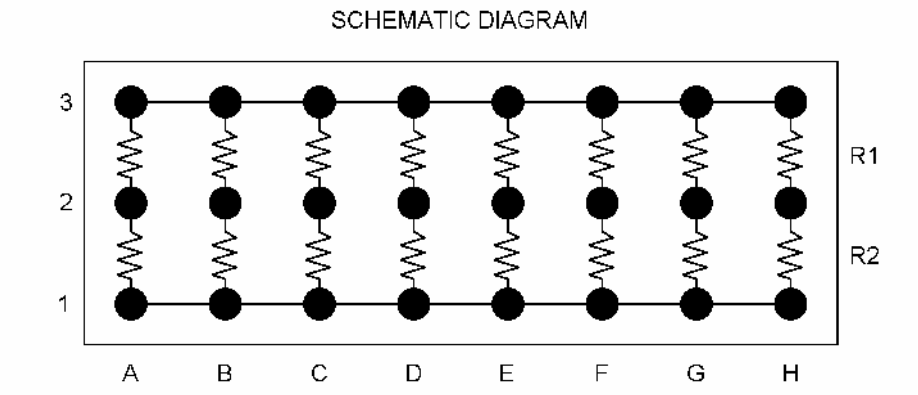


FIGURE 2. Schematic diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

TABLE I. Rating and characteristics.

CID dash number	R_1 (ohms)	R_2 (ohms)	Array size	Pitch
-001	330	470	3 x 8	0.039 (1.00 mm)
-002	220	1,800	3 x 8	0.039 (1.00 mm)

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See classification information for PIN format example.

Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these resistors to DSCC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

Source of documents.

Commercial Item Description

A-A-59769 - Resistor Networks, Ball Grid Array Terminators, General Requirements for.

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

Ordering data. Ordering data is as specified in A-A-59769.

Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown).

TABLE II. Commercial products.

CID PIN	MFR's CAGE	MFR's name and address
AA5976901-***	11236	CTS Corporation Berne Division 406 Parr Road Berne, IN 46711-9505

Part number (P/N) supersession data. This CID supersedes the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.

TABLE III. P/N supersession data.

CID dash number AA5976901-	MFR's CAGE	MFR's P/N 1/
001	11236	RT1210B7
002		RT1211B7

1/ The manufacturers P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown.

Government users. To acquire information on obtaining these resistors from the Government inventory system, Defense Supply Center, Columbus, ATTN: DSCC-CPB, Post Office Box 3990, Columbus, OH 43218-3990, or telephone (614) 692-7678.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing activity:

DLA - CC

Project 5905-2010-01

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:26Z
Check the source to verify that this is the current version before use.