
INCH-POUND
MIL-DTL-15291/10D
15 September 2025
SUPERSEDING
MIL-DTL-15291/10C
21 January 2022

DETAIL SPECIFICATION SHEET

SWITCHES, ROTARY, SNAP ACTION CLASS 6SR BASE MOUNTED, SIDE CONNECTED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-DTL-15291.

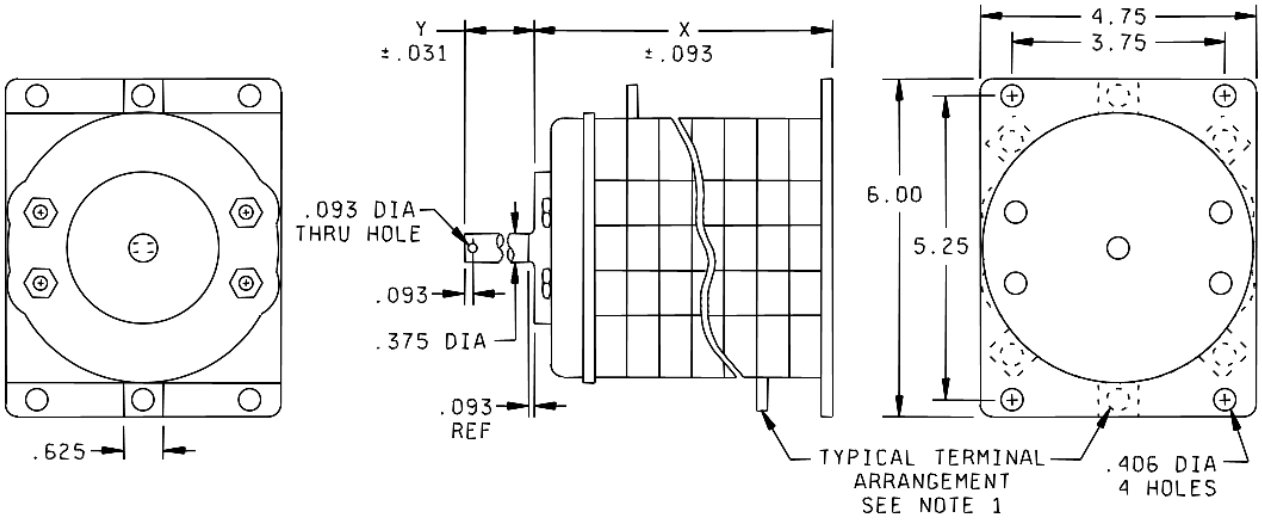

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± 0.015.

FIGURE 1. Class 6SR switch, base mounted, side connected, with coupler shaft.

AMSC N/A
FSC 5930
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

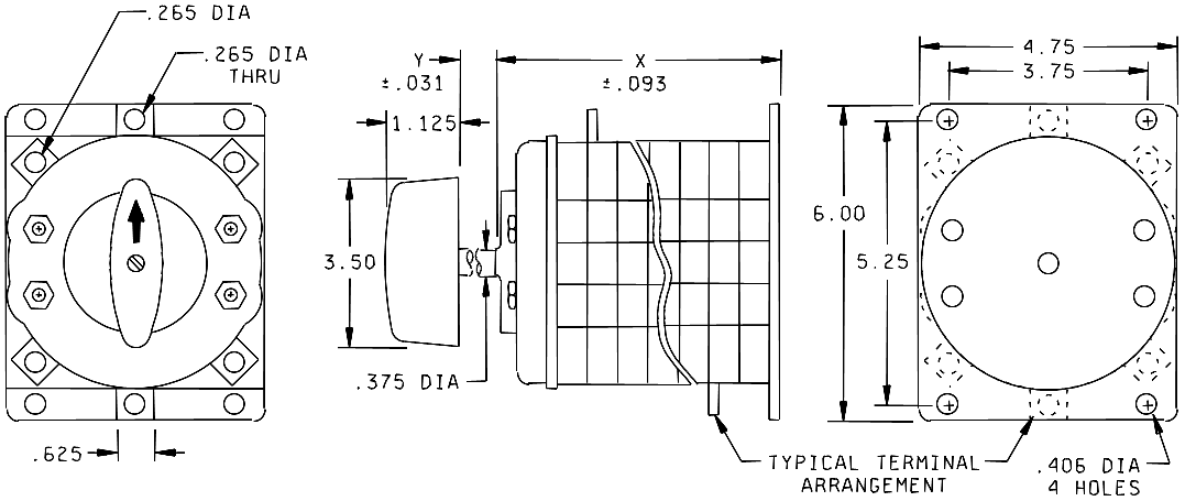


FIGURE 2. Class 6SR switch, base mounted, side connected, with handle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

TABLE I. Type and switching characteristics.

M15291/10 DASH NO. TYPE DESIGNATION	DETAIL REF / TORQUE IN-LBS	DIM "X" / DIM "Y"	HANDLE OR SHAFT POSITION	CIRCUIT AND SPACER CONFIGURATIONS ROTOR POSITION, SPACER LOCATIONS, TERMINAL MARKING AND LOCATIONS										NOTES
				NO 1	NO 2	NO 3	NO 4	NO 5	NO 6	NO 7	NO 8	NO 9	NO 10	
-001 6SR2A4	FIG 1 32	3.812 .562	OFF ON ON OFF		1 2	3 4								
-002 6SR3A4	FIG 1 32	4.437 .562	OFF ON ON OFF		1 2	3 4	5 6							
-003 6SR3A3A	FIG 2 32	4.531 .500	OFF ON ON OFF		1 2	3 4	5 6							
-004 6SR3B4	FIG 1 32	6.375 .562	OFF ON ON OFF		1 3	2	4	5 6	7	8 9				
-005 6SR4D4	FIG 1 32	7.687 .468	OFF ON ON OFF		1	2 3	4	5 6	7	8 9	10	11 12		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Applicable specification: MIL-DTL-15291.

Dimensions and mounting: See figures 1 and 2.

Switching characteristics: See table I.

Angle of throw: 90 degrees.

Switching action: Snap action, reciprocating.

Electrical and endurance ratings: See table II.

Stop strength (applicable to switches with stops): 100 inch-pounds.

Vibration: 50 Hz, MIL-STD-167-1.

Shock: High impact, MIL-DTL-901.

Contact resistance: 0.005 ohms maximum

Dielectric withstanding voltage: 2,000 V rms.

Insulation resistance: 200 megohms minimum.

Temperature rise: 50°C maximum.

Mounting screws: .250-20UNC-2A (4) length and head style to suit application. Screws not furnished.

TABLE II. Electrical and endurance ratings.

Tests	Current (amperes)	Voltage (volts)	Electrical operations (number of operations)	Test rate (operations per minute)	De-energized operations (number of operations)
Alternating current (rms)	30	500	20,000	30	10,000
Direct current	30	250	15,000	15	---

Terminal marking: Terminal markings shown in table I locate terminals as viewed from the front of the switch (handle end). Markings shall be stamped in front surfaces of terminals, clear of the screw heads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

GENERAL INFORMATION:

Switches not covered by specification sheets: Switches which are fabricated from standard parts, as used in qualified switches, but which do not comply with switches detailed herein with respect to circuit characteristics, switching action, mounting arrangement, and handle details may be acquired under this specification from contractors having qualification approval under this specification.

Extended ratings: Switches detailed herein have been tested and found satisfactory at the extended rating listed in table III. Reduced life expectancy must be anticipated for switches used at these increased voltage or current levels. Tests under the conditions of table III are not required for qualification acceptance and they are not repeated routinely as for maintenance of qualification. Supplemental evaluations and tests applicable to particular circuit requirements are recommended.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

TABLE III. Extended ratings.

Switching characteristics	AC 60 or 400 Hz											
	125 volts				250 volts				500 volts			
	Resistive or lamp load		Inductive load 0.75 p.f.		Resistive or lamp load		Inductive load 0.75 p.f.		Resistive or lamp load		Inductive load 0.75 p.f.	
	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations
All	30	20,000	30	20,000	30	20,000	30	20,000	30	20,000	30	20,000
C, D	40	6,000	40	6,000	--	--	--	--	--	--	--	--
A, B 1/	40	6,000	40	6,000	30	6,000	30	6,000	30	6,000	30	6,000
	DC											
	120 volts				250 volts				350 volts			
	Resistive or Lamp load		Inductive load[2]		Resistive or Lamp load		Inductive load[2]		Resistive or Lamp load		Inductive load[2]	
	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations
All	30	10,000	25	6,000	15	13,000	--	--	--	--	--	--
A, B	30	15,000	25	6,000	25	6,000	25	6,000	15	6,000	15	6,000
A, B 3/	--	--	--	--	30	15,000	--	--	--	--	--	--

1/ Single pole break - all other ratings are based on breaking both sides of the line in accordance with figures 1 and 2 of MIL-DTL-15291.
2/ 0.08 henry for inductive current.
3/ Switch with special arc snuffers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

APPLICATION AND ACQUISITION GUIDE: PIN and type designation cross reference shall be as shown on table IV.

TABLE IV. Application and acquisition guide.

M15291/10 dash no.	Type designation	For new or existing design	For replacement	Circuit configuration
-001	6SR2A3		X	A (on-off-on-off)
-002	6SR2A4	X		A (on-off-on-off)
-003	6SR2A4A	X		A (on-off-on-off)
-004	6SR3A3		X	A (on-off-on-off)
-005	6SR4A4	X		A (on-off-on-off)
-006	---	X		A (on-off-on-off)
-007	6SR2B4	X		A (off-on1-off-on 2)
-008	6SR3B3		X	A (off-on1-off-on 2)
-009	6SR3B4	X		A (off-on1-off-on 2)
-010	6SR4B4	X		A (off-on1-off-on 2)
-011	6SR2C3		X	C (on 1-on 2-on 1-on 2)
-012	6SR2C4	X		C (on 1-on 2-on 1-on 2)
-013	6SRSC4A	X		C (on 1-on 2-on 1-on 2)
-014	6SR3C3		X	C (on 1-on 2-on 1-on 2)
-015	6SR4C4	X		C (on 1-on 2-on 1-on 2)
-016	6SR5C4	X		C (on 1-on 2-on 1-on 2)
-017	6SR4D4	X		D (on 1-on 2-off-off)
-018	6SR7S4	X		S (see table I)

Referenced Documents:
MIL-DTL-15291
MIL-DTL-901
MIL-STD-167-1

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Navy - SH
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2022-041)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.