
INCH-POUND
MIL-DTL-15291/2D
21 August 2026
SUPERSEDING
MIL-DTL-15291/2C
21 January 2022

DETAIL SPECIFICATION SHEET

SWITCHES, ROTARY, SNAP ACTION CLASS 1SR FRONT MOUNTED, SIDE CONNECTED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-DTL-15291.

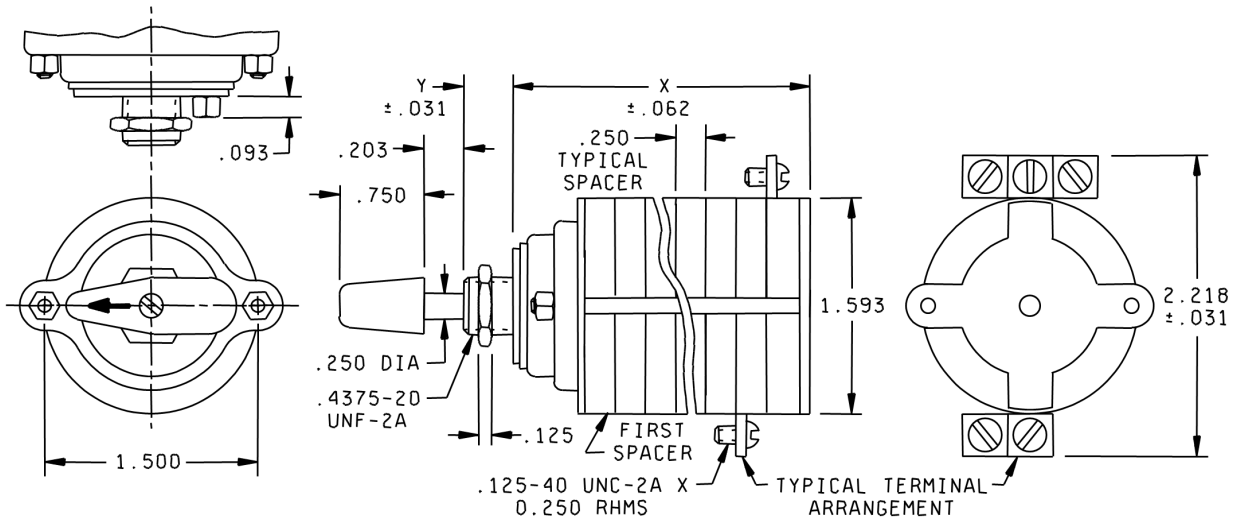

NOTE
1. Dimensions are in inches
2. Unless otherwise specified, tolerance is plus or minus 0.015

FIGURE 1 Class 1SR switch, single-hole mount (non-turn pin)

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:57Z
Check the source to verify that this is the current version before use.

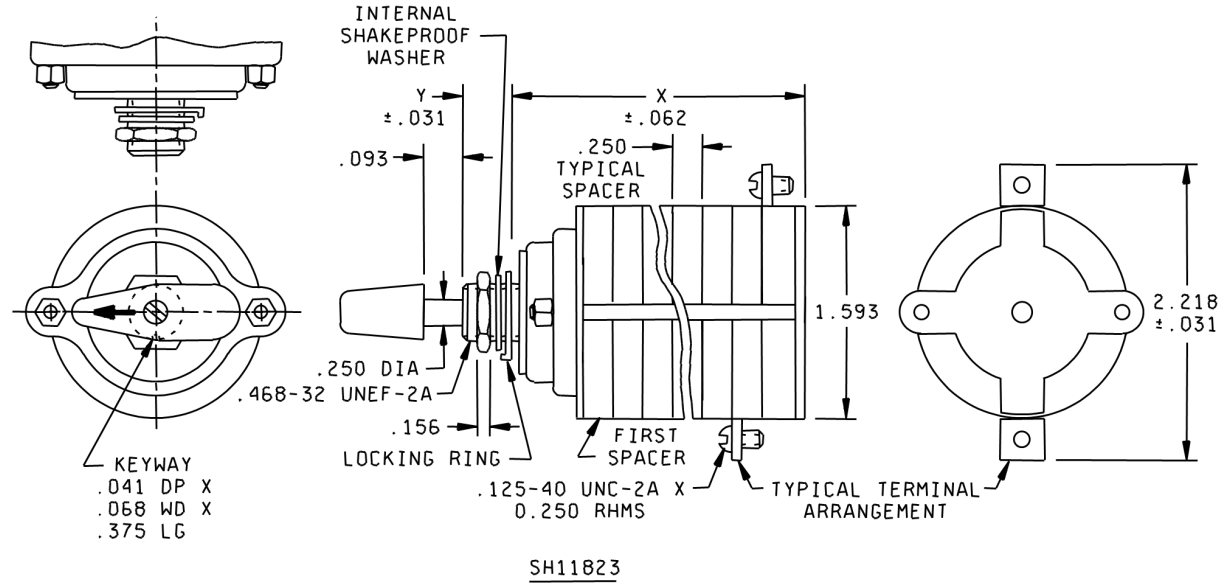


FIGURE 2. Class 1SR switch, single-hole mount (non-turn locking pin).

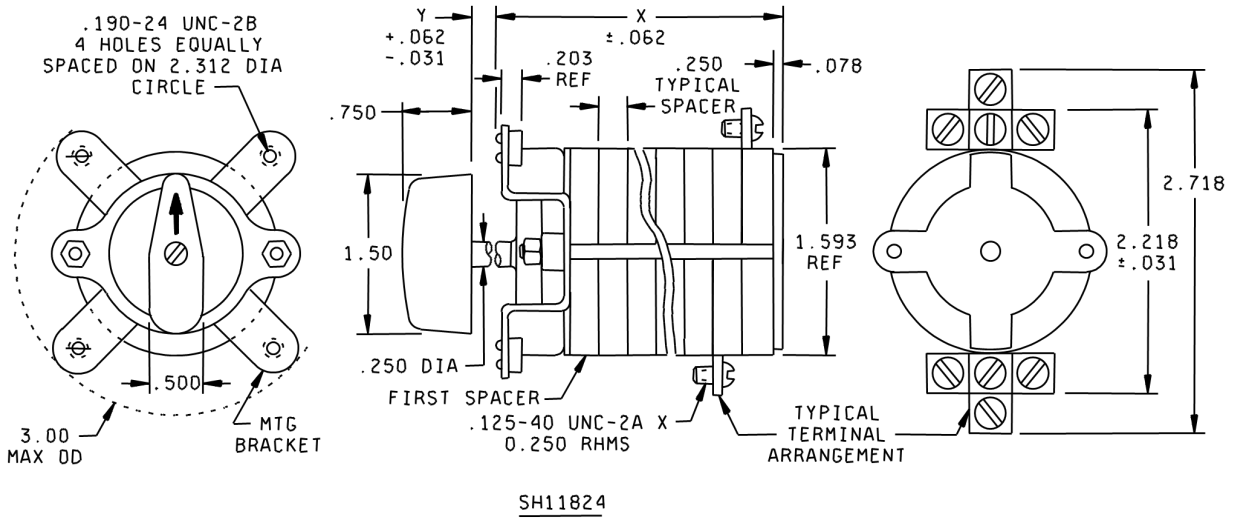


FIGURE 3. Class 1 SR switch, 4-hole mount.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:57Z
Check the source to verify that this is the current version before use.

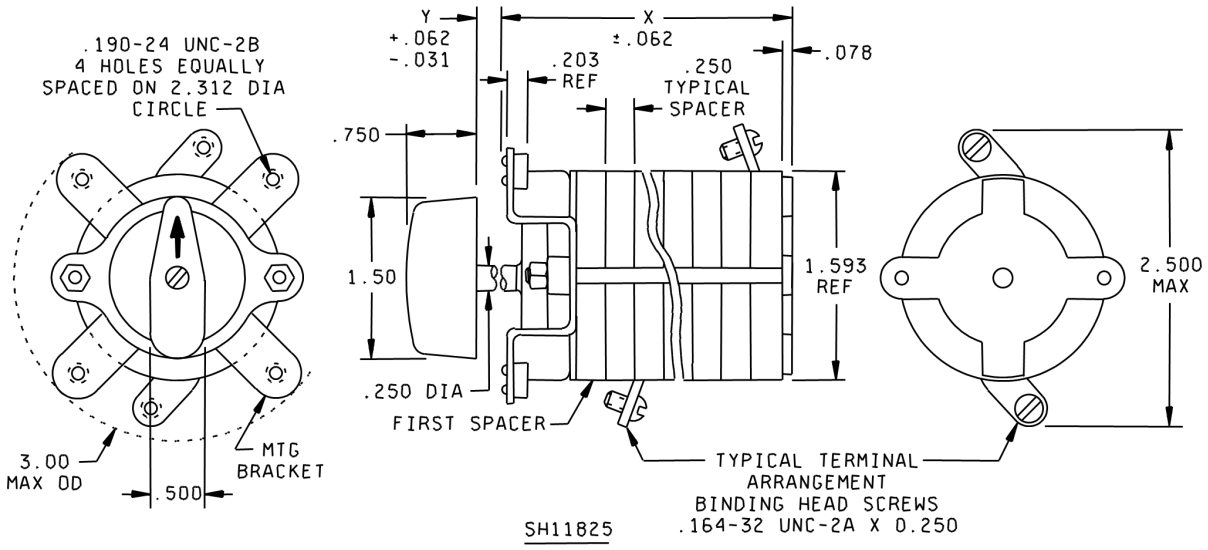


FIGURE 4. Class 1 SR switch, 4-hole mount

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:57Z
Check the source to verify that this is the current version before use.

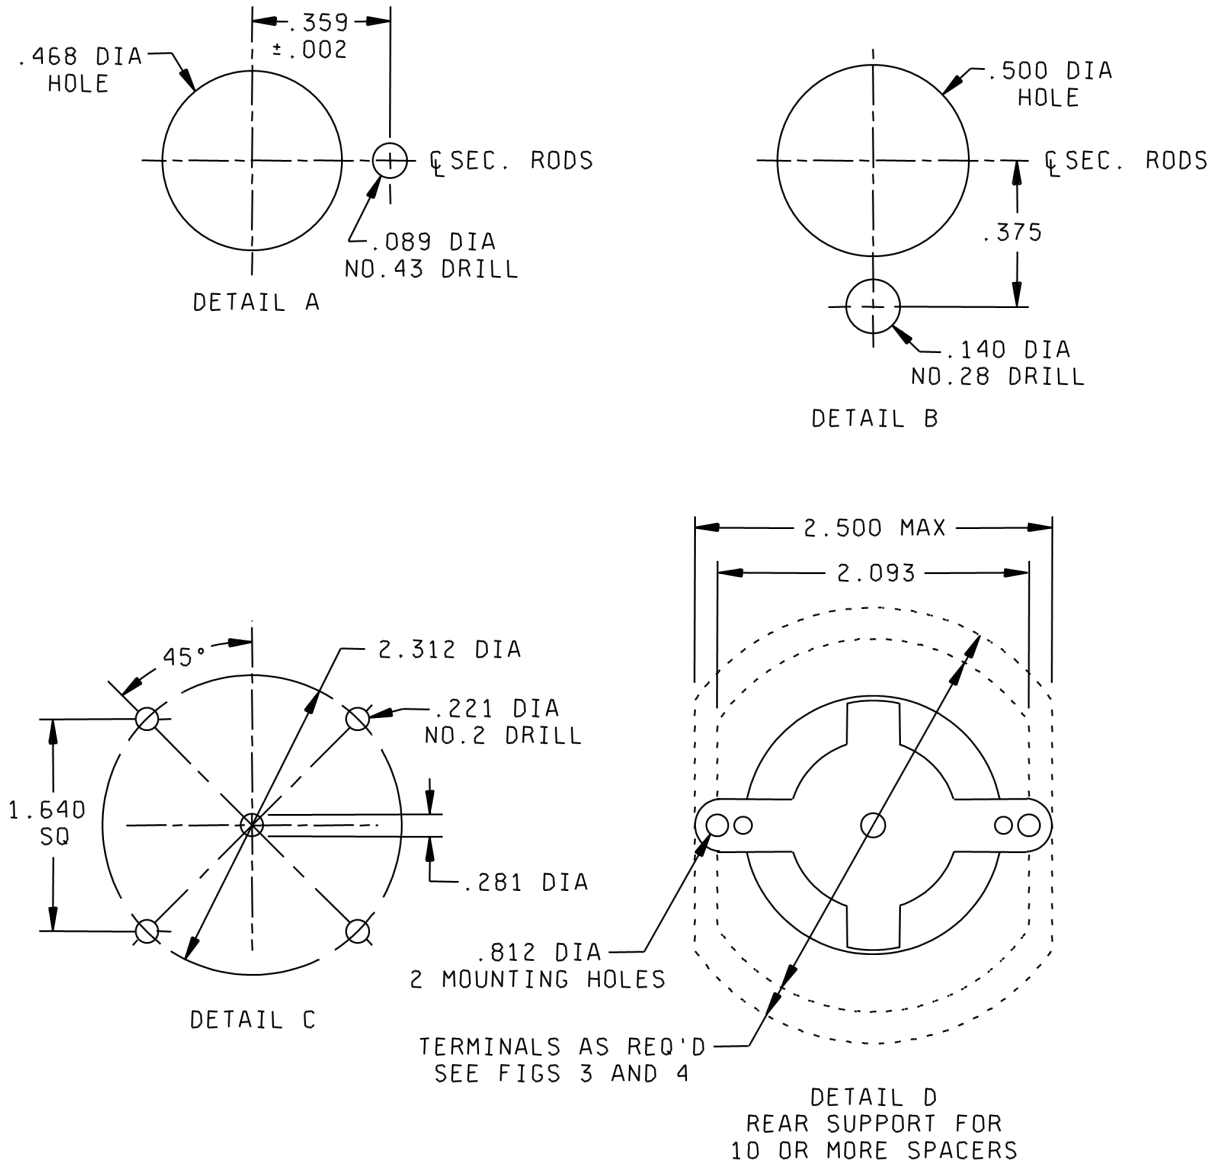












FIGURE 5. Mounting dimensions.






































































Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:57Z
Check the source to verify that this is the current version before use.

TABLE I Type and switching characteristics

M15291/2 DASH NO. TYPE DESIGNATION	DETAIL REF / TORQUE IN-LBS	DIM "X" / DIM "Y"	HANDLE OR SHAFT POSITION	CIRCUIT AND SPACER CONFIGURATIONS ROTOR POSITION, SPACER LOCATIONS, TERMINAL MARKING AND LOCATIONS									NOTES
				NO 1	NO 2	NO 3	NO 4	NO 5	NO 6	NO 7	NO 8	NO 9	
-001 1SR1A2	FIGS 3, 5C 4	1.250 .375											
-002	FIGS 4, 5C 4	1.312 .437											
-003 1SR2A2	FIG 3, 5C 4	1.500 .375											
-004	FIG 4 5C 4	1.562 .437											
-005 1SR3A2	FIG 3, 5C 4	1.750 .375											
-006	FIG 4, 5C 4	1.812 .437											
-007 1SR4A2	FIG 3, 5C 4	2.000 .375											
-008	FIG 4, 5C 4	2.062 .437											
-009	FIG 3, 5C 4	2.250 .375											
-010	FIG 4, 5C 4	2.312 .437											

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:57Z
Check the source to verify that this is the current version before use.

TABLE I Type and switching characteristics – Continued

M15291/2 DASH NO. TYPE DESIGNATION	DETAIL REF / TORQUE IN-LBS	DIM "X" / DIM "Y"	HANDLE OR SHAFT POSITION	CIRCUIT AND SPACER CONFIGURATIONS ROTOR POSITION, SPACER LOCATIONS, TERMINAL MARKING AND LOCATIONS											NOTES
				NO 1	NO 2	NO 3	NO 4	NO 5	NO 6	NO 7	NO 8	NO 9	NO 10	NO 11	
-011 1SR6A2	FIGS 3, 5C 4	2.500 .375													
-012	FIGS 4, 5C 4	2.562 .437													
-013	FIGS 3, 5C 4	2.750 .375													
-014	FIGS 4 5C 4	2.812 .437													
-015 1SR8A2	FIGS 3, 5C 4	3.000 .375													
-016	FIGS 4, 5C 4	3.062 .437													
-017 1SR9A2	FIGS 3, 5C 8	3.375 .375													
-018	FIGS 4, 5C 8	3.437 .437													
-019	FIGS 3, 5C 8	3.625 .375													
-020	FIGS 4, 5C 8	3.687 .437													

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:57Z
Check the source to verify that this is the current version before use.

TABLE I Type and switching characteristics – Continued.

M15291/2 DASH NO. TYPE DESIGNATION	DETAIL REF / TORQUE IN-LBS	DIM "X" / DIM "Y"	HANDLE OR SHAFT POSITION	CIRCUIT AND SPACER CONFIGURATIONS ROTOR POSITION, SPACER LOCATIONS, TERMINAL MARKING AND LOCATIONS											NOTES
				NO 1	NO 2	NO 3	NO 4	NO 5	NO 6	NO 7	NO 8	NO 9	NO 10	NO 11	
-021	FIGS 3, 5C	1.500	OFF ON 2 ON 1 OFF		1	2 3									
	4	.375													
-022	FIGS 4, 5C	1.562	OFF ON 2 ON 1 OFF		1	2 3									
	4	.437													
-023	FIGS 3, 5C	2.000	OFF ON 2 ON 1 OFF		1	2 3	4 5	6							
1SR2B2	4	.375													
-024	FIGS 4 5C	2.062	OFF ON 2 ON 1 OFF		1	2 3	4	5 6							
	4	.437													
-025	FIGS 3, 5C	2.500	OFF ON 2 ON 1 OFF		1	2 3	4 5	6	7	8 9					
1SR3B2	4	.375													
-026	FIGS 4, 5C	2.562	OFF ON 2 ON 1 OFF		1	2 3	4	5 6	7	8 9					
	4	.437													
-027	FIGS 3, 5C	3.000	OFF ON 2 ON 1 OFF		1	2 3	4 5	6	7	8 9	10 11	12			
1SR4B2	4	.375													
-028	FIGS 4, 5C	3.062	OFF ON 2 ON 1 OFF		1	2 3	4	5 6	7	8 9	10	11 12			
	4	.437													
-029	FIGS 3, 5C	3.500	OFF ON 2 ON 1 OFF		1	2 3	4 5	6	7	8 9	10 11	12	13	14 15	
	4	.375													
-030	FIGS 4, 5C	3.437	OFF ON 2 ON 1 OFF		1	2 3	4	5 6	7	8 9	10	11 12	13	14 15	
	4	.437													

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:57Z
Check the source to verify that this is the current version before use.

TABLE I Type and switching characteristics – Continued.

M15291/2 DASH NO. TYPE DESIGNATION	DETAIL REF / TORQUE IN-LBS	DIM "X" / DIM "Y"	HANDLE OR SHAFT POSITION	CIRCUIT AND SPACER CONFIGURATIONS ROTOR POSITION, SPACER LOCATIONS, TERMINAL MARKING AND LOCATIONS													NOTES
				NO 1	NO 2	NO 3	NO 4	NO 5	NO 6	NO 7	NO 8	NO 9	NO 10	NO 11	NO 12	NO 13	
-031 1SR6B2	FIGS 3, 5C 4	4.000 .375	OFF, ON 1, ON 2														
-032	FIGS 4, 5C 4	4.062 .437	OFF, ON 1, ON 2														
-033 1SR1C2	FIGS 3, 5C 4	1.250 .375	ON 1, ON 2														1
-034 1SR2C2	FIGS 3 5C 4	1.750 .375	ON 1, ON 2														1
-035 1SR3C2	FIGS 3, 5C 4	2.250 .375	ON 1, ON 2														1
-036 1SR4C2	FIGS 3, 5C 4	2.750 .375	ON 1, ON 2														1
-037	FIGS 3, 5C 4	3.250 .375	ON 1, ON 2														1
-038 1SR6C2	FIGS 3, 5C 4	3.750 .375															1

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:57Z
Check the source to verify that this is the current version before use.

TABLE I Type and switching characteristics – Continued.

M15291/2 DASH NO. TYPE DESIGNATION	DETAIL REF / TORQUE IN-LBS	DIM "X" / DIM "Y"	HANDLE OR SHAFT POSITION	CIRCUIT AND SPACER CONFIGURATIONS ROTOR POSITION, SPACER LOCATIONS, TERMINAL MARKING AND LOCATIONS													NOTES
				NO 1	NO 2	NO 3	NO 4	NO 5	NO 6	NO 7	NO 8	NO 9	NO 10	NO 11	NO 12	NO 13	
-039 1SR1E2	FIGS 3, 5C 4	1.500 .375	OFF ON 1 ON 2 ON 3		1 4	2 3											
-040	FIGS 4, 5C 4	1.562 .437	OFF ON 1 ON 2 ON 3		1 4	2 3											
-041 1SR2E2	FIGS 3, 5C 4	2.000 .375	OFF ON 1 ON 2 ON 3		1 4	2 3	5 8	6 7									
-042	FIGS 4 5C 4	2.062 .375	OFF ON 1 ON 2 ON 3		1 4	2 3	5 8	6 7									
-043	FIGS 3, 5C 4	2.500 .375	OFF ON 1 ON 2 ON 3		1 4	2 3	5 8	6 7	9 12	10 11							
-044	FIGS 4, 5C 4	2.562 .437	OFF ON 1 ON 2 ON 3		1 4	2 3	5 8	6 7	9 12	10 11							
-045	FIGS 3, 5C 4	3.000 .375	OFF ON 1 ON 2 ON 3		1 4	2 3	5 8	6 7	9 12	10 11	13 16	14 15					
-046	FIGS 4, 5C 4	3.062 .437	OFF ON 1 ON 2 ON 3		1 4	2 3	5 8	6 7	9 12	10 11	13 16	14 15					
-047	FIGS 4, 5C 4	3.562 .437	OFF ON 1 ON 2 ON 3		1 4	2 3	5 8	6 7	9 12	10 11	13 16	14 15	17	18 20			
-048	FIGS 4, 5C 4	4.062 .437	OFF ON 1 ON 2 ON 3		1 4	2 3	5 8	6 7	9 12	10 11	13 16	14 15	17	18 20	21	22 24	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:57Z
Check the source to verify that this is the current version before use.

TABLE I Type and switching characteristics – Continued.

M15291/2 DASH NO. TYPE DESIGNATION	DETAIL REF / TORQUE IN-LBS	DIM "X" / DIM "Y"	HANDLE OR SHAFT POSITION	CIRCUIT AND SPACER CONFIGURATIONS ROTOR POSITION, SPACER LOCATIONS, TERMINAL MARKING AND LOCATIONS							NOTES
				NO 1	NO 2	NO 3	NO 4	NO 5	NO 6	NO 7	
-049	FIGS 3, 5C	1.500	OFF / ON 1&2								2
		.375									
-050	FIGS 4, 5C	1.562	OFF / ON 1&2								3
		.437									
-051 1SR4F2	FIGS 3, 5C	2.000	OFF / ON 1&2								2
		.375									
-052	FIGS 4 5C	2.062	OFF / ON 1&2								3
		.437									
-053 1SR6F2	FIGS 3, 5C	2.500	OFF / ON 1&2								2
		.375									
-054	FIGS 4, 5C	2.562	OFF / ON 1&2								3
		.437									
-055	FIGS 3, 5C	1.500	ON 1 / ON 3								
	4	.375									
-056	FIGS 4, 5C	1.562	ON 1 / ON 3								
	4	.437									
-057	FIGS 3, 5C	2.000	ON 1 / ON 3								
	4	.375									
-058	FIGS 4, 5C	2.062	ON 1 / ON 3								
	4	.437									
























































Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:57Z
Check the source to verify that this is the current version before use.

TABLE I Type and switching characteristics – Continued.

M15291/2 DASH NO. TYPE DESIGNATION	DETAIL REF / TORQUE IN-LBS	DIM "X" / DIM "Y"	HANDLE OR SHAFT POSITION	CIRCUIT AND SPACER CONFIGURATIONS ROTOR POSITION, SPACER LOCATIONS, TERMINAL MARKING AND LOCATIONS													NOTES
				NO 1	NO 2	NO 3	NO 4	NO 5	NO 6	NO 7	NO 8	NO 9	NO 10	NO 11	NO 12	NO 13	
-059	FIGS 3, 5C	2.500	ON 1 / ON 2 / ON 3 / ON 4		1 2	6 6 8 7	7 7 8	9 10 12 11	13 13 14	15 16 18 17							
	4	.375															
-060	FIGS 4, 5C	2.437	ON 1 / ON 2 / ON 3 / ON 4		1	2 3 5 4	6	7 8 10 9	11	12 13 15 14							
	4	.437															
-061	FIGS 3, 5C	3.000	ON 1 / ON 2 / ON 3 / ON 4		1 2	3 4 6 5	7 8	9 10 12 11	13 13 14	15 16 18 17	19 20	21 22 24 23					
	4	.375															
-062	FIGS 4 5C	3.062	ON 1 / ON 2 / ON 3 / ON 4		1	2 3 5 4	6	7 8 10 9	11	12 13 15 14	16 20	17 18 20 19					
	4	.437															
-063	FIGS 3, 5C		ON 1 / ON 2 / ON 3 / ON 4		1	2 3 5 4	6	7 8 10 9	11	12 13 15 14	16	17 18 20 19	21	22 23 25 24			
		.437															
-064	FIGS 4, 5C		ON 1 / ON 2 / ON 3 / ON 4		1	2 3 5 4	6	7 8 10 9	11	12 13 15 14	16	17 18 20 19	21	22 23 25 24	26	27 28 30 29	
		.437															
-065	FIGS 4, 5C	1.312	OFF / ON 1 / ON 2		1 3 2												
	4	.437															
-066	FIGS 4, 5C	1.562	OFF / ON 1 / ON 2		1 3 2	4 5 6											
	4	.437															
-067	FIGS 4, 5C	1.812	OFF / ON 1 / ON 2		1 3 2	4 5 6	7 9 8										
	4	.437															
-068	FIGS 4, 5C	2.062	OFF / ON 1 / ON 2		1 3 2	4 5 6	7 9 8	10 11 12									
	4	.437															


























Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:57Z
Check the source to verify that this is the current version before use.

TABLE I Type and switching characteristics – Continued.

M15291/2 DASH NO. TYPE DESIGNATION	DETAIL REF / TORQUE IN-LBS	DIM "X" / DIM "Y"	HANDLE OR SHAFT POSITION	CIRCUIT AND SPACER CONFIGURATIONS ROTOR POSITION, SPACER LOCATIONS, TERMINAL MARKING AND LOCATIONS									NOTES
				NO 1	NO 2	NO 3	NO 4	NO 5	NO 6	NO 7	NO 8	NO 9	
-069	FIGS 4, 5C	2.312											
	4	.437											
-070	FIGS 4, 5C	2.437											
	4	.437											
-071	FIGS 4, 5C	2.937											
	8	.437											
-072	FIGS 4 5C	3.187											
	8	.437											
-073	FIGS 4, 5C	1.312											
	4	.437											
-074	FIGS 4, 5C	1.437											
	4	.437											
-075	FIGS 4, 5C	1.812											
	4	.437											
-076	-	2.062											
	4	.437											
-077													
	4	.437											
-078		2.562											
	-	.437											

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:57Z
Check the source to verify that this is the current version before use.

TABLE I Type and switching characteristics – Continued

M15291/2 DASH NO. TYPE DESIGNATION	DETAIL REF / TORQUE IN-LBS	DIM "X" / DIM "Y"	HANDLE OR SHAFT POSITION	CIRCUIT AND SPACER CONFIGURATIONS ROTOR POSITION, SPACER LOCATIONS, TERMINAL MARKING AND LOCATIONS									NOTES
				NO 1	NO 2	NO 3	NO 4	NO 5	NO 6	NO 7	NO 8	NO 9	
-079	FIGS 4, 5C	2.937											
	8	.437											
-080	FIGS 4, 5C	3.187											
	8	.437											
-081 1SRS52	FIGS 1, 5A	2.000											
	4	.406											
-082 1SRS52A	FIGS 2 5B	2.000											
	4	.375											

[1]External jumpers not furnished Applies to all “C” switches
[2]Break before make See requirements and figure 6
[3]Make before break

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Applicable specification:	MIL-DTL-15291
Dimensions and mounting:	See figures 1 through 8
Switching characteristics:	See table I
Angle of throw:	90 degrees
Switching action:	Snap action, reciprocating
Electrical and endurance ratings:	See table II
Stop strength (applicable to switches with stops):	30 inch-pounds
Vibration:	50 Hz, MIL-STD-167-1
Shock (high impact):	High impact, MIL-DTL-901
Overload.	600 percent of ac rating, 50 make and break operations
Contact resistance:	0.02 ohms maximum
Dielectric withstanding voltage:	1,250 Vrms
Insulation resistance:	200 megohms minimum
Temperature rise:	50°C maximum
Mounting screws.	.190-24UNC-2A (4) length and headstyle to suit application, screws not furnished.
Handle	M15291/1-100 per MIL-DTL-15291/1.
Terminal marking:	Terminal markings shown in table I locate terminals as viewed from the front of the switch (handle end) Markings shall be stamped in rear surfaces of terminals, clear of the screw heads.
Make before break switching characteristic F:	Operation of a characteristic F, make before break switch from the “1 and 2” position to either the “1” position or the “2” position shall not interrupt continuity through the ultimate position (1 or 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:57Z
Check the source to verify that this is the current version before use.

TABLE II Electrical and endurance ratings.

Tests	Current (amperes)	Voltage (volts)	Electrical Operations (number of operations)	Test rate (operations per minute)	De-energized operations (number of operations)
Alternating current (rms)	10	125	30,000	30	20,000
Direct current	10	120	20,000	15	--

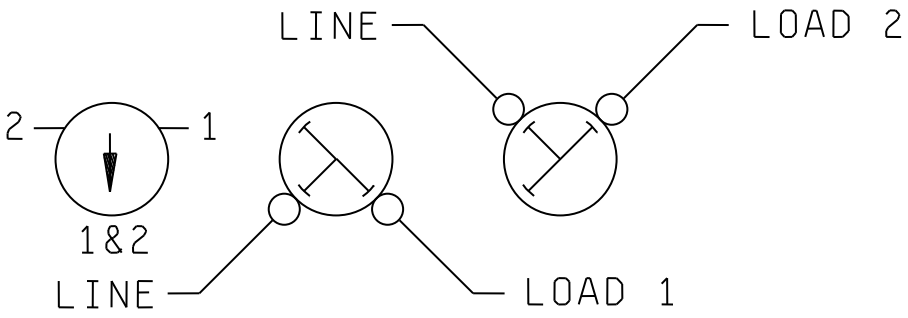


FIGURE 6. Switching characteristic F

GENERAL INFORMATION:

Switches not covered by specification sheets: Switches which are fabricated from standard parts, as used in qualified switches, but which do not comply with switches detailed herein with respect to circuit characteristics, switching action, mounting arrangement, and handle details may be acquired under this specification from contractors having qualification approval under this specification.

Extended ratings: Switches detailed herein have been tested and found satisfactory at the extended ratings listed in table III. Reduced life expectancy must be anticipated for switches used at these increased voltage or current levels. Tests under the conditions of table III are not required for qualification acceptance and they are not repeated routinely as for maintenance of qualification. Supplemental evaluations and tests applicable to particular circuit requirements are recommended.

Sealed mounting: Switches listed in table I as having four-point mounting (see figure 4), and "Y" dimension not less than 7/16 inch can be mounted with a kit (see figure 7), to effect a submersible seal (SBM15) between switch and mounting panel. Panel drilling must comply with figure 8. Kits not supplied unless specified (see 6.2 of MIL-DTL-15291).


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:57Z
Check the source to verify that this is the current version before use.

TABLE III. Extended ratings.

Switching characteristics	AC 60 or 400 Hz											
	125 volts				250 volts				500 volts			
	Resistive or lamp load		Inductive load 0.75 p.f.		Resistive or lamp load		Inductive load 0.75 p.f.		Resistive or lamp load		Inductive load 0.75 p.f.	
	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations
All[1]	10	30,000	10	30,000	--	--	--	--	--	--	--	--
C,D,E,F,G	15	10,000	15	10,000	10	10,000	10	10,000	5	10,000	5	10,000
A, B[2]	15	10,000	15	10,000	10	10,000	10	10,000	5	10,000	5	10,000
A, B	15	10,000	15	10,000	15	10,000	15	10,000	10	10,000	10	10,000
	DC											
	120 volts				250 volts				350 volts			
	Resistive or Lamp load		Inductive load[3]		Resistive or Lamp load		Inductive load[3]		Resistive or Lamp load		Inductive load[3]	
	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations
C,D,E,F,G	10	10,000	10	10,000	5	10,000	5	10,000	2	10,000	2	10,000
C,D,E,F,G[2]	--	--	--	--	--	--	--	--	1	10,000	1	10,000
A, B[2]	10	10,000	10	10,000	5	10,000	5	10,000	2	10,000	2	10,000
A, B	10	20,000	15	10,000	--	--	--	--	--	--	--	--

[1]Switching characteristic F is not rated for 450 volts in class 1SR
[2]Single pole break – all other ratings are based on breaking both sides of the line in accordance with figure 1 and 2
[3]0.24 henry for inductive circuit


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:57Z
Check the source to verify that this is the current version before use.

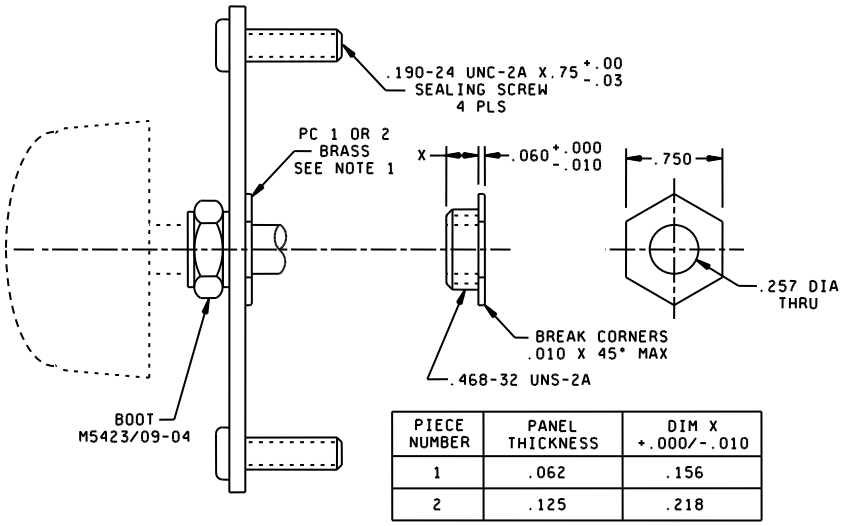

PIECE NUMBER	PANEL THICKNESS	DIM X +.000/-.010
1	.062	.156
2	.125	.218

NOTE
1 Finish shall be zinc and dichromate, ASTM-B633

FIGURE 7. Kit for panel seal mounting.

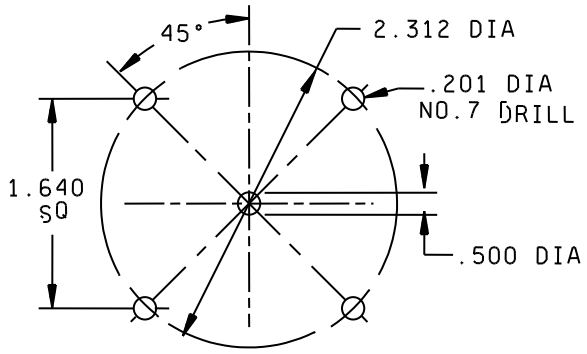

NOTE
1. Do not chamfer mounting holes. Breaking 1/64 maximum permissible.

FIGURE 8. Panel drilling for mounting kit.

Application and Acquisition Guide: PIN and type designation cross reference shall be as shown in table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:57Z
Check the source to verify that this is the current version before use.

TABLE IV. Application and acquisition guide.

M15291/2 dash No.	Type designation	For new or existing design	For re-placement	Circuit configuration
-001	ISR1A2		X[1]	A (off-on-off-on)
-002	-	X		A (off-on-off-on)
-003	ISR2A2		X	A (off-on-off-on)
-004	-	X		A (off-on-off-on)
-005	ISR3A2		X	A (off-on-off-on)
-006	-	X		A (off-on-off-on)
-007	ISR4A2		X	A (off-on-off-on)
-008	-	X		A (off-on-off-on)
-009	-		X	A (off-on-off-on)
-010	-	X		A (off-on-off-on)
-011	ISR6A2		X	A (off-on-off-on)
-012	-	X		A (off-on-off-on)
-013	-		X	A (off-on-off-on)
-014	-	X		A (off-on-off-on)
-015	ISR8A2		X	A (off-on-off-on)
-016	-	X		A (off-on-off-on)
-017	8SR9A2		X	A (off-on-off-on)
-018	-	X		A (off-on-off-on)
-019	-		X	A (off-on-off-on)
-020	-	X		A (off-on-off-on)
-021	ISR1B2		X[1]	B (off-on-1-off-on 2)
-022	-	X		B (off-on-1-off-on 2)
-023	ISR2B2		X	B (off-on-1-off-on 2)
-024	-	X		B (off-on-1-off-on 2)
-025	ISR3B2		X	B (off-on-1-off-on 2)
-026	-	X		B (off-on-1-off-on 2)
-027	ISR4B2		X	B (off-on-1-off-on 2)
-028	-	X		B (off-on-1-off-on 2)
-029	-		X	B (off-on-1-off-on 2)
-030	-	X		B (off-on-1-off-on 2)
-031	ISR6B2		X	B (off-on-1-off-on 2)
-032	-	X		B (off-on-1-off-on 2)
-033	ISR1C2	X		C (on 1-on 2-on 1-on 2)
-034	ISR1C2	X		C (on 1-on 2-on 1-on 2)
-035	ISR1C2	X		C (on 1-on 2-on 1-on 2)
-036	ISR1C2	X		C (on 1-on 2-on 1-on 2)
-037	-	X		C (on 1-on 2-on 1-on 2)
-038	ISR6C2	X		C (on 1-on 2-on 1-on 2)
-039	ISR1E2		X[1]	E (off-on 1-on 2-on 3)
-040	-	X		E (off-on 1-on 2-on 3)
-041	ISR2E2		X	E (off-on 1-on 2-on 3)
-042	-	X		E (off-on 1-on 2-on 3)
-043	-		X	E (off-on 1-on 2-on 3)
-044	-	X		E (off-on 1-on 2-on 3)
-045	-		X	E (off-on 1-on 2-on 3)
-046	-	X		E (off-on 1-on 2-on 3)
-047	-	X		E (off-on 1-on 2-on 3)
-048	-	X		E (off-on 1-on 2-on 3)
-049	-		X[1]	F (off-on 1-on 1 & 2-on 2)
-050	-	X		F (off-on 1-on 1 & 2-on 2)
-051	ISR4F2		X	F (off-on 1-on 1 & 2-on 2)
-052	-	X		F (off-on 1-on 1 & 2-on 2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:57Z
Check the source to verify that this is the current version before use.

TABLE IV. Application and acquisition guide – Continued

M15291/2 dash No.	Type designation	For new or existing design	For re-placement	Circuit configuration
-053	ISR6F2		X	F (off-on 1-on 1 & 2-on 2)
-054	-	X		F (off-on 1-on 1 & 2-on 2)
-055	ISR1G2		X[1]	G (-on 1-on 2-on 3)
-056	-	X		G (-on 1-on 2-on 3)
-057	-		X	G (-on 1-on 2-on 3)
-058	-	X		G (-on 1-on 2-on 3)
-059	-		X	G (-on 1-on 2-on 3)
-060	-	X		G (-on 1-on 2-on 3)
-061	ISR4G2		X	G (-on 1-on 2-on 3)
-062	-	X		G (-on 1-on 2-on 3)
-063	-	X		G (-on 1-on 2-on 3)
-064	-	X		G (-on 1-on 2-on 3)
-065	-	X		H (on 1-off-on 2)
-066	-	X		H (on 1-off-on 2)
-067	-	X		H (on 1-off-on 2)
-068	-	X		H (on 1-off-on 2)
-069	-	X		H (on 1-off-on 2)
-070	-	X		H (on 1-off-on 2)
-071	-	X		H (on 1-off-on 2)
-072	-	X		H (on 1-off-on 2)
-073	-	X		J (on 1-on 2-on 1-on 2)
-074	-	X		J (on 1-on 2-on 1-on 2)
-075	-	X		J (on 1-on 2-on 1-on 2)
-076	-	X		J (on 1-on 2-on 1-on 2)
-077	-	X		J (on 1-on 2-on 1-on 2)
-078	-	X		J (on 1-on 2-on 1-on 2)
-079	-	X		J (on 1-on 2-on 1-on 2)
-080	-	X		J (on 1-on 2-on 1-on 2)
-081	ISR4S2	X		S (see table I)
-082	ISR5S2A	X		S (see table I)

[1]Switches having circuit configurations A, B, E, F, or G and designated “For replacement” should be superseded in new designs by the next higher dash number of the same configuration and number of poles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:57Z
Check the source to verify that this is the current version before use.

Referenced Documents:
MIL-DTL-15291
MIL-DTL-15291/1
MIL-DTL-901
MIL-STD-167-1
ASTM-B633

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Navy - SH
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2026-057)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:57Z
Check the source to verify that this is the current version before use.