INCH-POUND


MIL-S-15291/4A(SH)
22 July 1991
SUPERCEDING
MIL-S-15291/4(SH)
17 April 1981

MILITARY SPECIFICATION SHEET

SWITCHES, ROTARY, DETENT AND SPRING-RETURN ACTION CLASS 1SRN FRONT MOUNTED, SIDE CONNECTED

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-15291

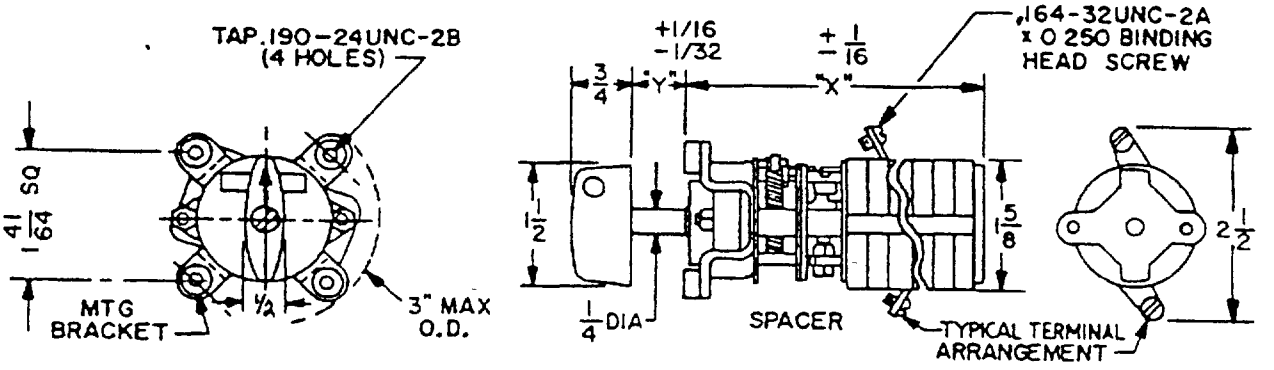

NOTES
1 Dimensions are in inches
2 Unless otherwise specified, tolerance is plus or minus 0.015

FIGURE 1 *Class 1SRN switch, 4 positions*

AMSC N/A FSC 5930

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

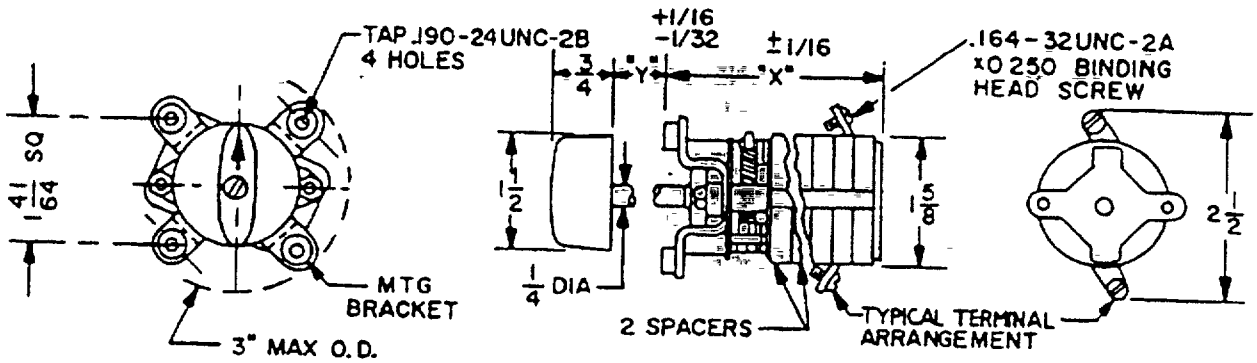


FIGURE 2 *Class 1SRN swuch, 3 posutions*


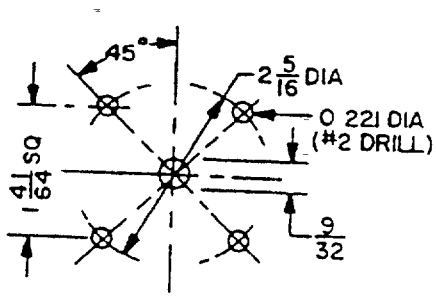


FIGURE 3 *Panel drilling*


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

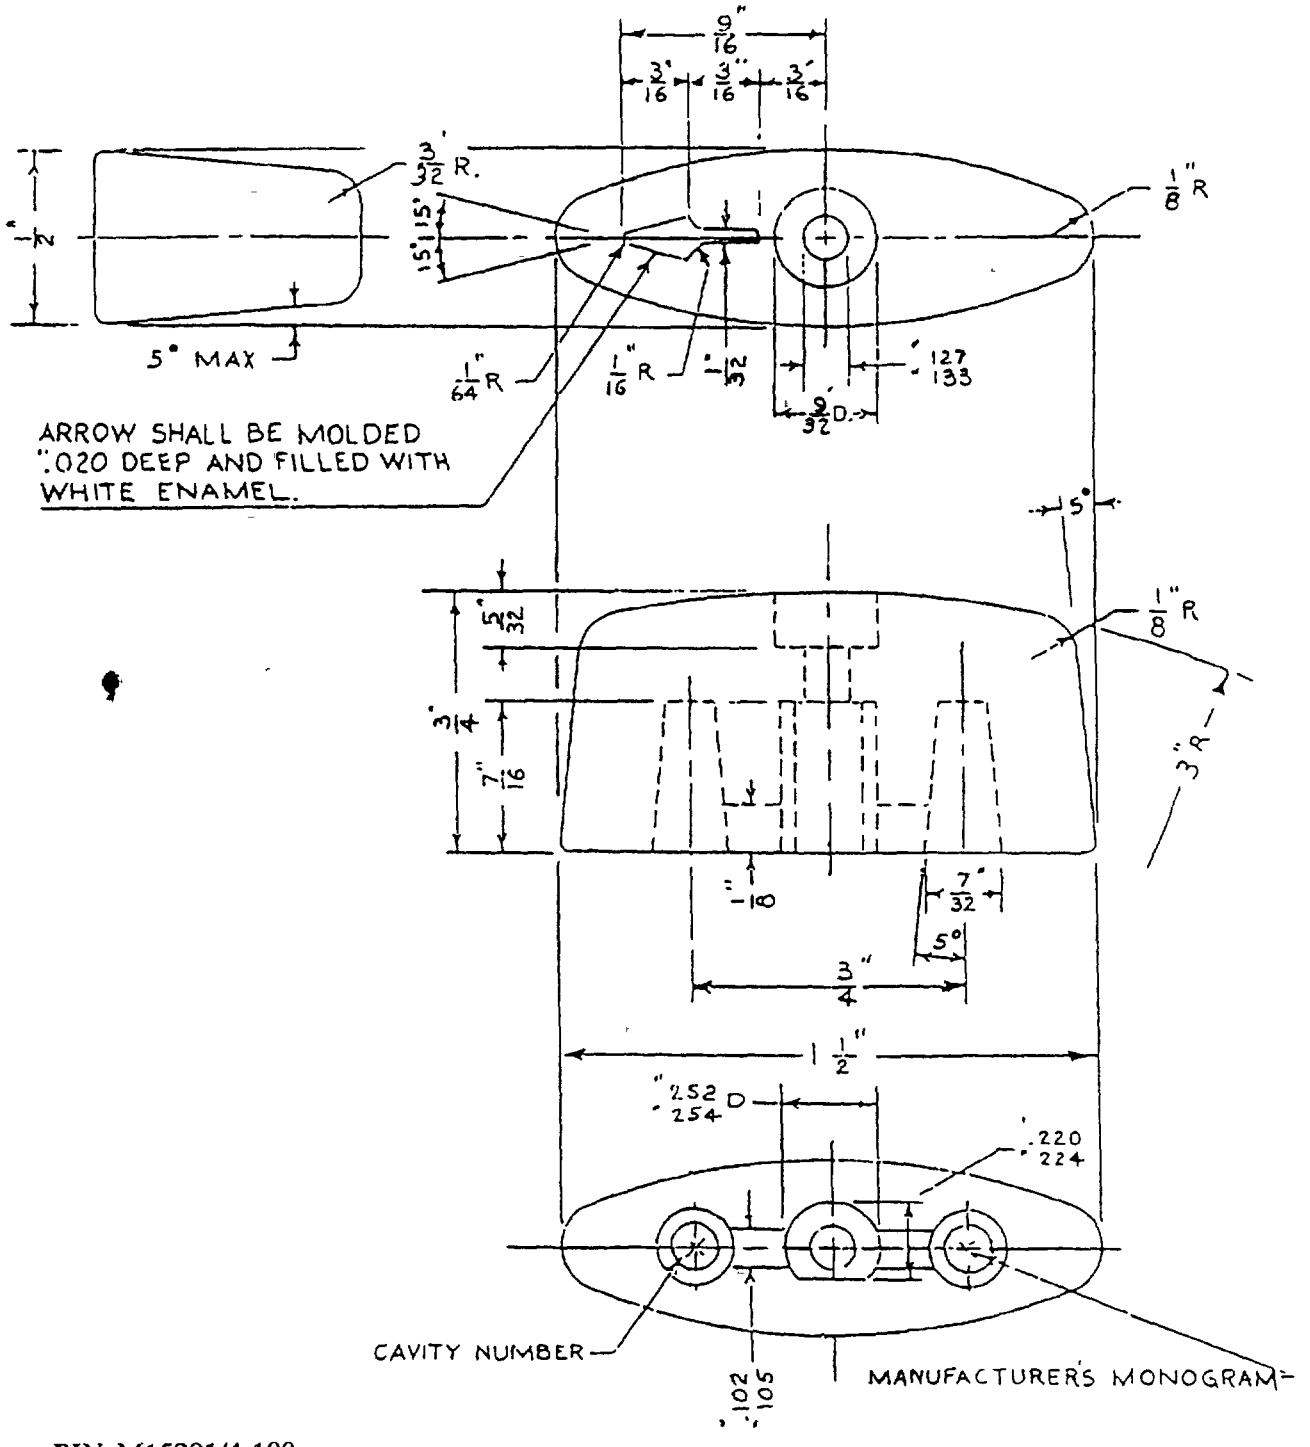

PIN M15291/4-100

FIGURE 4 *Handle.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

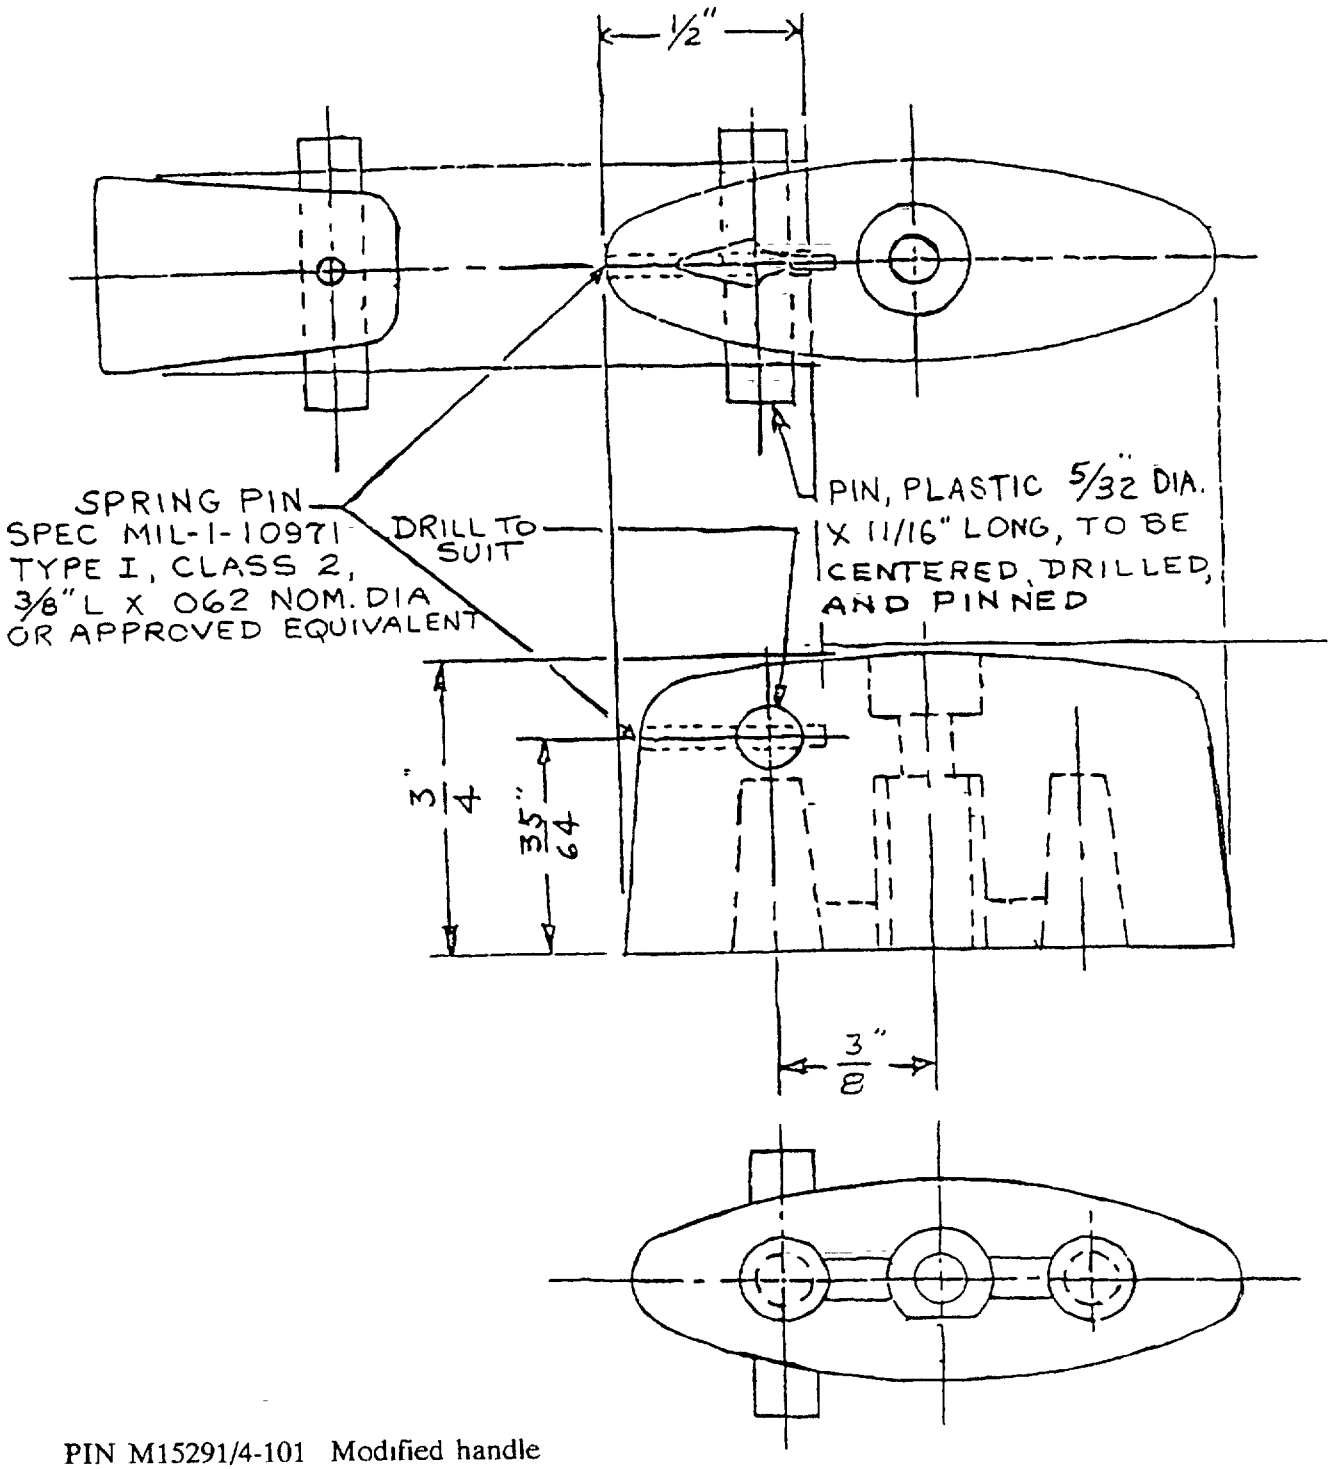

PIN M15291/4-101 Modified handle
USE M15291/4-100 to modify

FIGURE 4 *Handle – Continued*

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

TABLE I *Type and switching characteristics*

MIL-S-15291/4 Dash No	Detail ref	Dim "X"	Handle positions	Circuit and spacer configuration rotor position, spacer locations, terminal marking and locations									Notes
	Torque in-lbs	Dim "Y"		No 1	No 2	No 3	No 4	No 5	No 6	No 7	No 8	No 9	
-001	Fig 1	3 21/32											-1
	4	1/4											
-002	Fig 2	2 21/32											
	4	1/4											
-003	Fig 2	2 29/32											-2
	4	1/4											
-004	Fig 2	2 21/32											-2
	4	7/16											
-005	Fig 2	2 21/32											
	4	3/8											
-006	Fig 2	2 29/32											
	4	3/8											
			STOPS	SPRING RETURN TO POSITION INDICATED (TYPICAL)									

[1]The circuit through contacts 5 and 6 shall close at 255° rotation from "OFF" instead of at normal 240°
[2]Make before break

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Applicable specification	MIL-S-15291
Dimensions and mounting·	See figures 1 through 3
Electrical circuits:	See table I
Angle of throw:	90 degrees
Switching action:	Detent and spring-return, reciprocating
Electrical and endurance ratings	See table II
Stop strength (applicable to switches with stops):	50 inch-pounds
Vibration·	50 Hz, MIL-STD-167-1
Shock:	High impact, MIL-S-901
Insulation (Spacers and decks)	Glass alkyd, MAI-60 (or MAI-30) in accordance with MIL-M-14
Contact resistance·	0.02 ohms maximum
Dielectric withstanding voltage	1,250 Vrms
Insulation resistance:	200 megohms minimum
Temperature rise	50 °C maximum
Contact material	Rotor, phosphor bronze – Stationary contact, copper
Mounting screws	.190-24UNC-2A (4) length and headstyle to suit application. Screws not furnished.
Transfer time:	Not applicable

TABLE II *Electrical and endurance ratings*

Tests	Current (amperes)	Voltage (volts)	Electrical operations (number of operations)[1]	Test rate (operations per minute)	De-energized operations (number of operations)
Alternating current (rms)	10	125	20,000	30	10,000

[1]For purpose of this test the switch shall be operated alternately to a detented position then to a momentary position Action shall be single line make and break at rated load in both positions This cycling shall be considered as two operations.


Terminal marking.	Terminal markings shown in table I locates terminals as viewed from the front of the switch (handle end) Markings shall be stamped in rear surfaces of terminals, clear of the screw heads

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

GENERAL INFORMATION:

Switches not covered by specification sheets:

Switches which are fabricated from standard parts, as used in qualified switches, but which do not comply with switches detailed herein with respect to circuit characteristics, switching action, mounting arrangement, and handle details may be acquired under this specification from contractors having qualification approval under this specification. Kits not supplied unless specified (see 6.2 of MIL-S-15291).

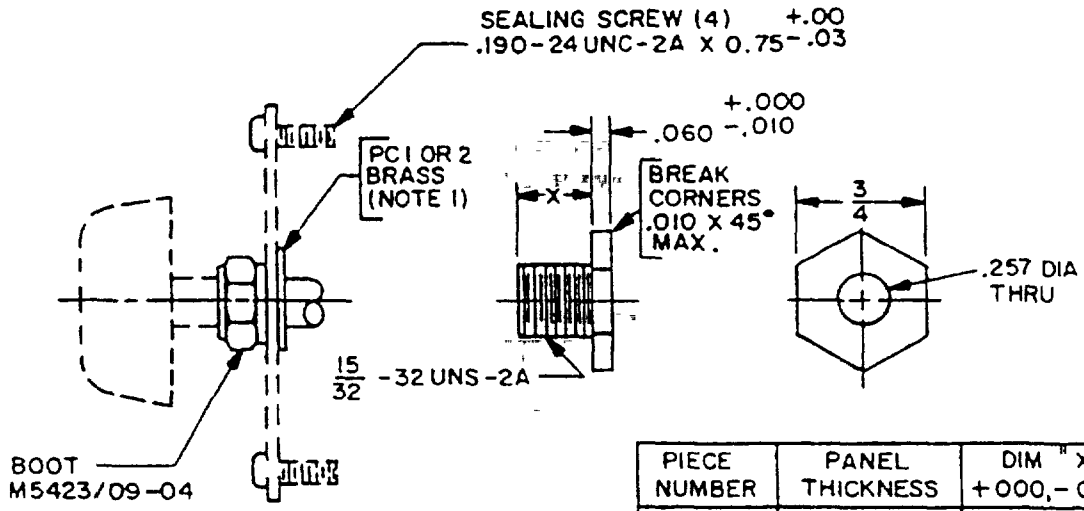


PIECE NUMBER	PANEL THICKNESS	DIM "X" +.000,-.010
1	1/16	5/32
2	1/8	7/32

NOTE
1 Finish shall be zinc and dichromate, ASTM B 633

FIGURE 5. *Dripproof mounting kit*

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

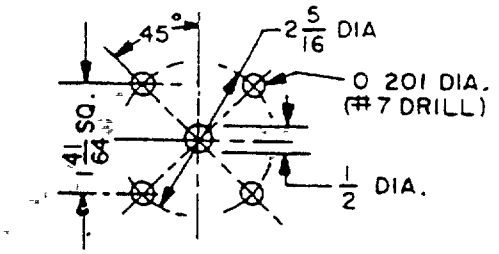

NOTE
1 Do not chamfer mounting holes Breaking 1/64 maximum permissible

FIGURE 6 *Kit for panel seal mounting.*

APPLICATION AND ACQUISITION GUIDE: PIN and type designation cross reference shall be as shown in table IV.

TABLE IV. *Application and acquisition guide*

M15291/4 dash No	Type designation	For new or existing design	For replacement	Circuit configuration (see table I)
-001	-	X		S
-002	-	X		S
-003	-	X		S
-004	-	X		S
-005	-	X		S
-006	-	X		S

Revision letters are not used to denote changes due to the extensiveness of the changes

Preparing activity
Navy - SH
(Project 5930-N663-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.