
INCH-POUND
MIL-DTL-15291/4B
6 February 2006
SUPERCEDING
MIL-S-15291/4A(SH)
22 July 1991

DETAIL SPECIFICATION SHEET

SWITCHES, ROTARY, DETENT AND SPRING-RETURN ACTION CLASS 1SRN FRONT MOUNTED, SIDE CONNECTED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-DTL-15291.

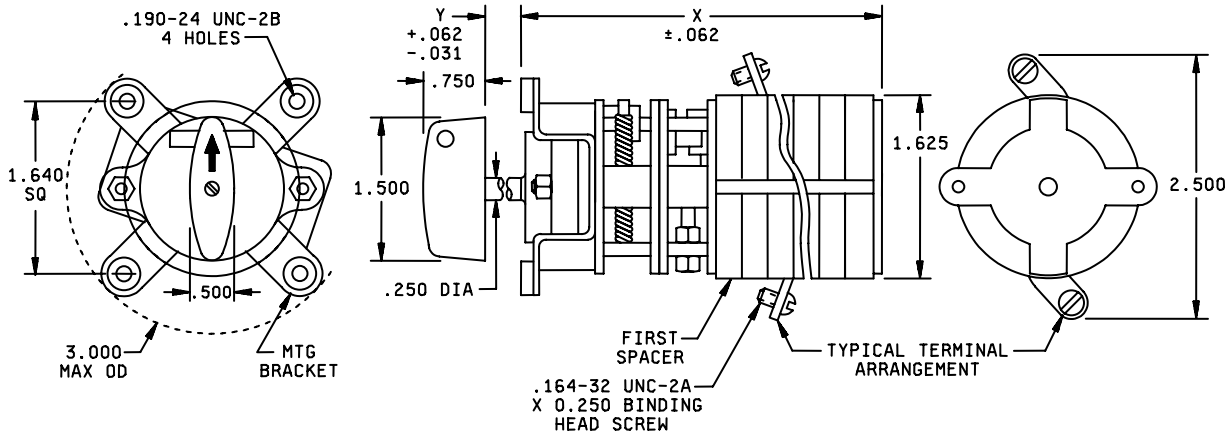

NOTE
1. Dimensions are in inches
2. Unless otherwise specified, tolerance is plus or minus 0.015

FIGURE 1 Class 1SRN switch, 4 positions

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

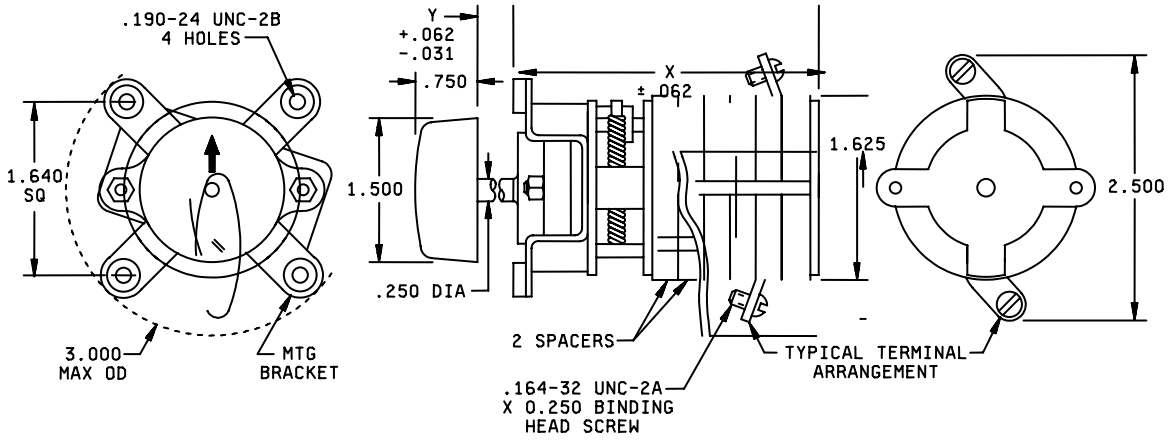


FIGURE 2. Class 1SR switch, 3 positions.

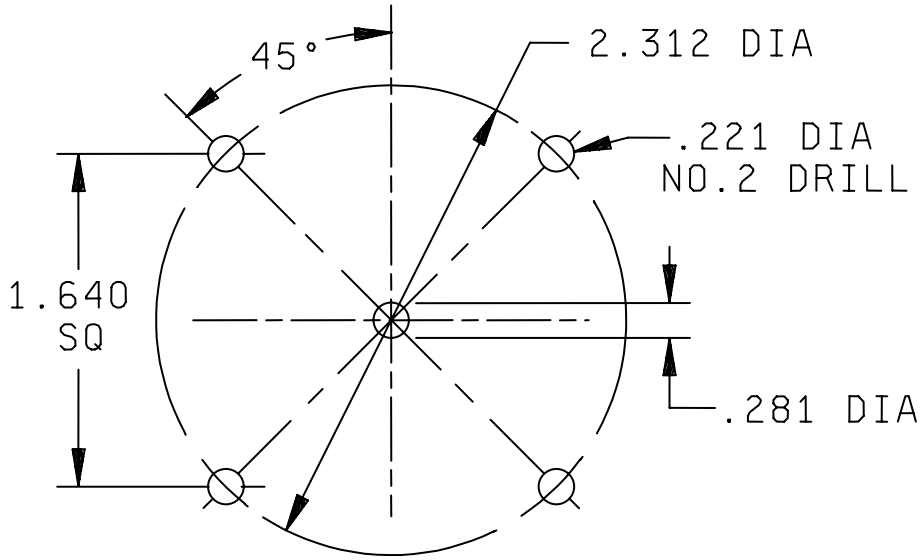


FIGURE 3. Panel drilling

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

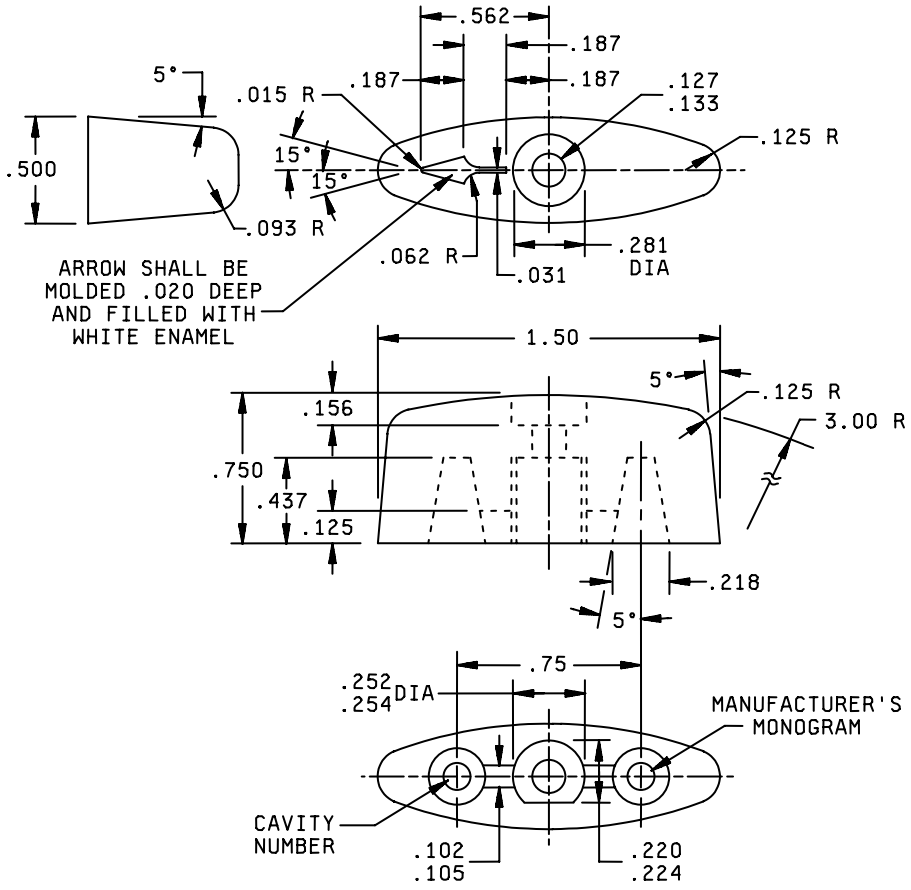


FIGURE 4. Handle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

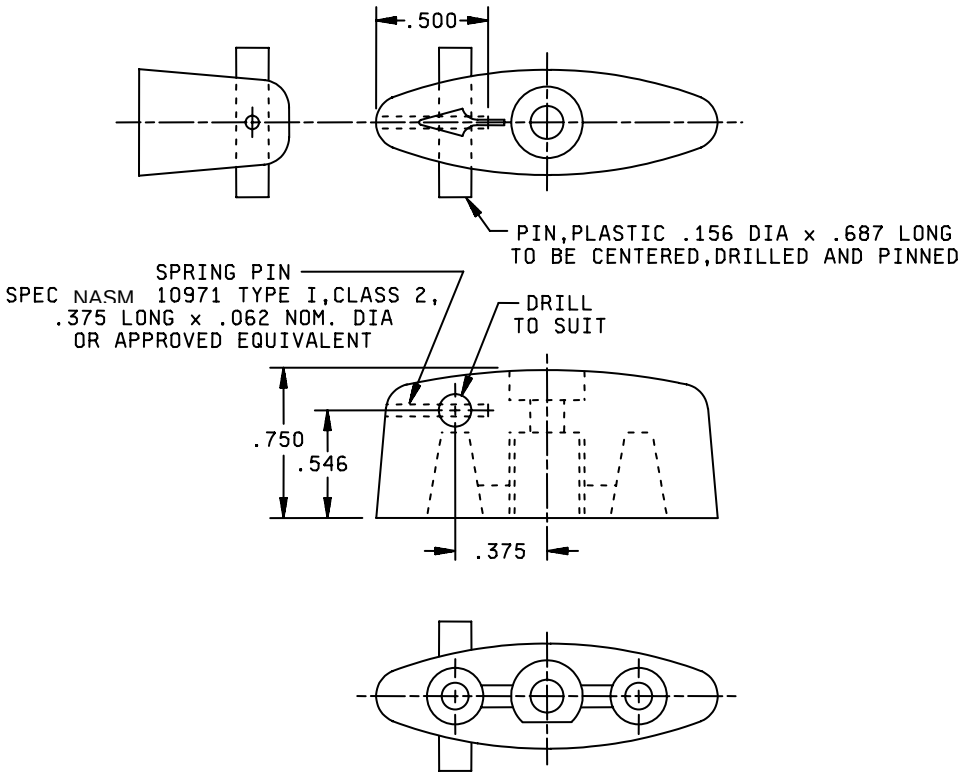




























FIGURE 4 Handle – Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

TABLE I Type and switching characteristics

M15291/4 DASH NO. TYPE DESIGNATION	DETAIL REF / TORQUE IN-LBS	DIM "X" / DIM "Y"	HANDLE OR SHAFT POSITION	CIRCUIT AND SPACER CONFIGURATIONS ROTOR POSITION, SPACER LOCATIONS, TERMINAL MARKING AND LOCATIONS NO 1	NO 2	NO 3	NO 4	NO 5	NO 6	NO 7	NO 8	NO 9	NOTES
-001	FIG 1	3.656											1
	4	.250											
-002	FIG 2	2.656												
	4	.250											
-003	FIG 2	2.906												2
	4	.250											
-004	FIG 2	2.656												2
	4	.437											
-005	FIG 2	2.656												
	4	.375											
-006	FIG 2	2.906												
	4	.375											

STOPS

SPRING RETURN TO POSITION INDICATED (TYPICAL)

[1]The circuit through contacts 5 and 6 shall close at 255° rotation from “OFF” instead of at normal 240°.
[2]Make before break

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Applicable specification: MIL-DTL-15291

Dimensions and mounting: See figures 1 through 3

Switching characteristics: See table I

Angle of throw: 90 degrees

Switching action: Detent and spring-return, reciprocating

Electrical and endurance ratings: See table II

Stop strength (applicable to switches with stops): 50 inch-pounds

Vibration: 50 Hz, MIL-STD-167-1

Shock (high impact): High impact, MIL-S-901

Contact resistance: 0.02 milliohms maximum

Dielectric withstanding voltage: 1,250 Vrms

Insulation resistance: 200 megaohms minimum

Temperature rise: 50ºC maximum

Mounting screws: .190-24UNC-2A (4) length and head style to suit application, screws not furnished.

Transfer time: Not applicable

TABLE II Electrical and endurance ratings.

Tests	Current (amperes)	Voltage (volts)	Electrical Operations (number of operations)[1]	Test rate (operations per minute)	De-energized operations (number of operations)
Alternating current (rms)	10	125	20,000	30	10,000


[1]For purpose of this test the switch shall be operated alternately to a detented position. Action shall be single line make and break at rated load in both positions. This cycling shall be considered as two operations.

Terminal marking: Terminal markings shown in table I locate terminals as viewed from the front of the switch (handle end) Markings shall be stamped in rear surfaces of terminals, clear of the screw heads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

GENERAL INFORMATION:

Switches not covered by specification sheets: Switches which are fabricated from standard parts, as used in qualified switches, but which do not comply with switches detailed herein with respect to circuit characteristics, switching action, mounting arrangement, and handle details may be acquired under this specification from contractors having qualification approval under this specification. Kits not supplied unless specified (see 6.2 of MIL-DTL-15291).

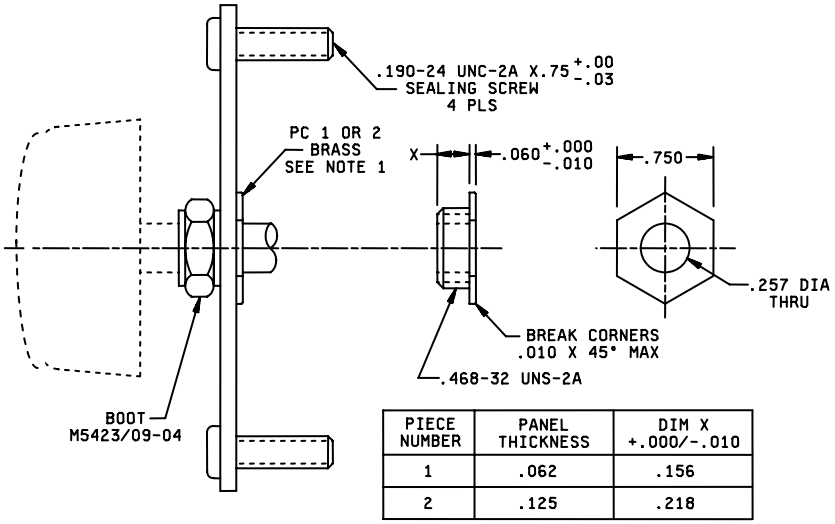


PIECE NUMBER	PANEL THICKNESS	DIM X +.000/-.010
1	.062	.156
2	.125	.218

PIECE NUMBER	PANEL THICKNESS	DIM “X” +.000, -.010
1	1/16	5/32
2	1/8	7/32

FIGURE 5. Dripproof mounting kit

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

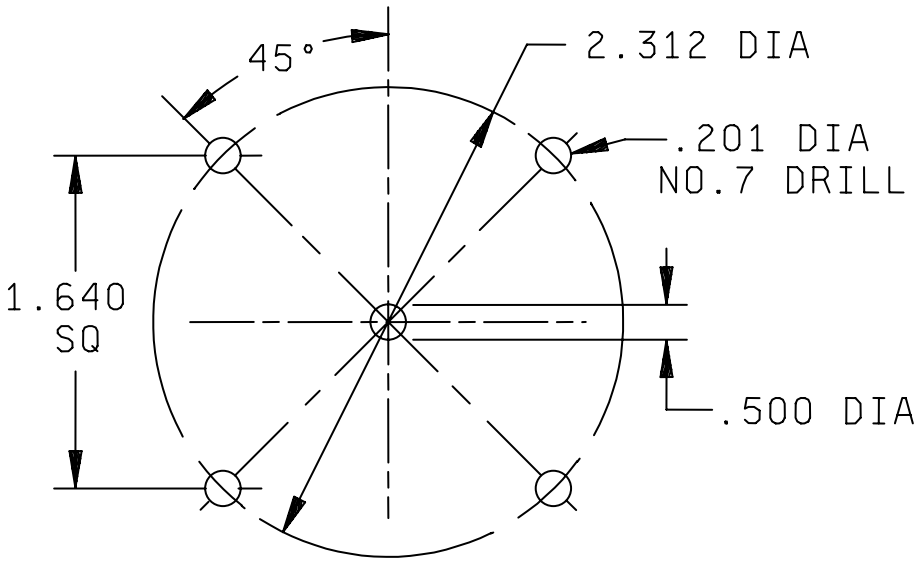

NOTE
1. Do not chamfer mounting holes. Breaking 1/64 maximum permissible.

FIGURE 6. Panel drilling for mounting kit.

APPLICATION AND ACQUISITION GUIDE: PIN and type designation cross reference shall be as shown in table IV

TABLE IV. Application and acquisition guide.

M15291/2 dash No.	Type designation	For new or existing design	For re-placement	Circuit configuration
-001	-	X		S
-002	-	X		S
-003	-	X		S
-004	-	X		S
-005	-	X		S
-006	-	X		S

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.

Referenced Documents:
MIL-DTL-15291
MIL-S-901
MIL-STD-167-1
NASM 10971

Changes from previous issue: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Navy - SH
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-1903)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:58Z
Check the source to verify that this is the current version before use.