INCH-POUND


MIL-S-15291/6B(SH)
22 July 1991
SUPERCEDING
MIL-S-15291/6A(SH)
30 September 1985

MILITARY SPECIFICATION SHEET

SWITCHES, ROTARY, SNAP ACTION CLASS 3SR FRONT MOUNTED, SIDE CONNECTED

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-15291.

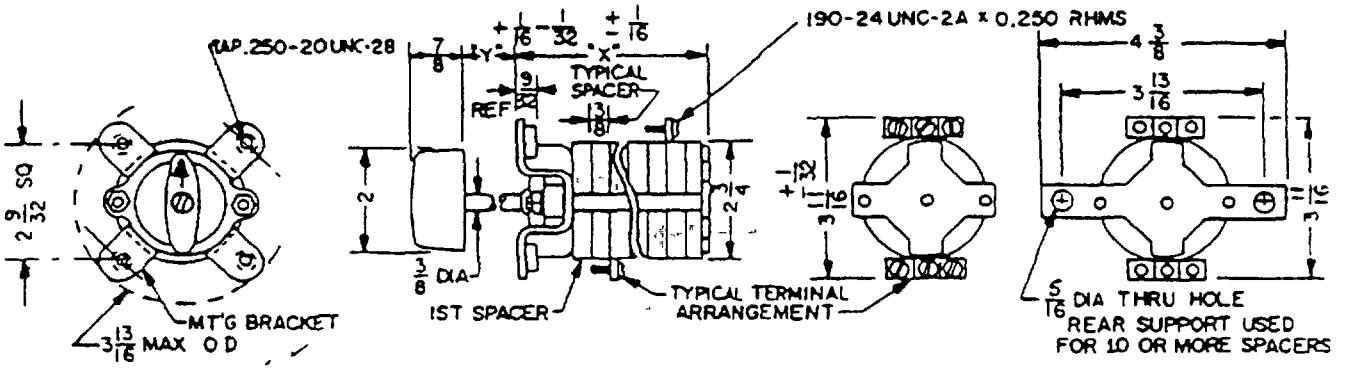

NOTES

1. Dimensions are in inches
2. Unless otherwise specified, tolerance is plus or minus 0.015
3. MIL-S-15291/6(SH) for procurement of original style switches with terminal connections as shown on table 1-033, order by number *MIL-S-15291-3SR8A2A.

FIGURE 1. *Front mounted, side connected*

AMSC N/A

FSC 5930

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

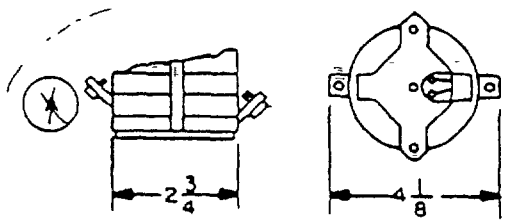


FIGURE 1A.

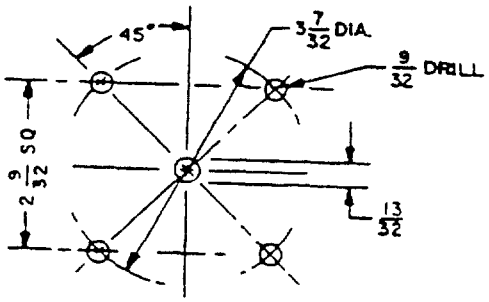


FIGURE 2 *Panel mounting dimensions*

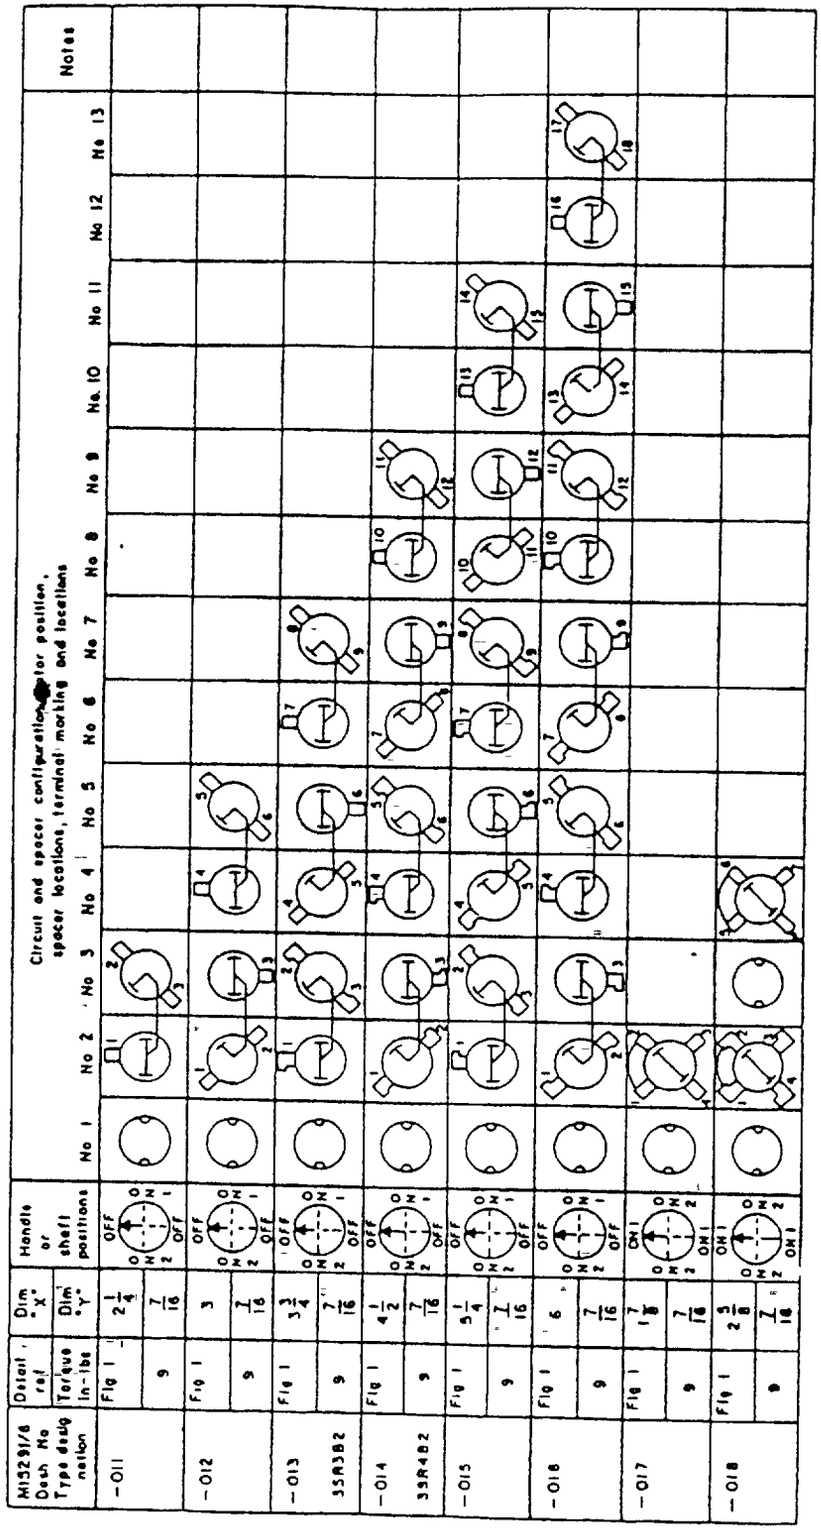
Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

TABLE I. *Type and switching characteristics*

MIL-S-15291/6 Dash No Type designation	Detail ref Torque in lbs	Dim "X"	Dim "Y"	Handle or shaft position	Circuit and spacer configuration rotor position, spacer locations, terminal marking and locations No. 1	No. 2	No. 3	No. 4	No. 5	No. 6	No. 7	No. 8	No. 9	No. 10	No. 11	No. 12	No. 13	Notes
-001	Fig 1	1 7/16	3/16	Off / On														
	9																	
-002	Fig 1	1 1/4	3/16	Off / On														
	9																	
-003	Fig 1	2 5/8	3/16	Off / On														
3SR3A2	9																	
-004	Fig 1	3	3/16	Off / On														
3SR4A2	9																	
-005	Fig 1	3 3/8	3/16	Off / On														
	9																	
-006	Fig 1	3 3/4	7/16	Off / On														
3SR6A2	9																	
-007	Fig 1	4 1/8	7/16	Off / On														
	9																	
-008	Fig 1	4 1/2	7/16	Off / On														
3SR8A2	9																	
-009	Fig 1	5 1/8	7/16	Off / On														
3SR9A2	10																	
-010	Fig 1	5 1/2	7/16	Off / On														
	10																	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

TABLE I *Type and switching characteristics – Continued*

MIL-S-15291/6 Dash No Type designation	Detent ref	Torque in-lbs	Dim "X"	Dim "Y"	Handle or shaft positions	Circuit and spacer configuration, rotor position, spacer locations, terminal marking and locations	Notes
-011	Fig 1	-	2 1/4	7/16	OFF, ON 1, ON 2, OFF		
	9						
-012	Fig 1		3	7/16	OFF, ON 1, ON 2, OFF		
	9						
-013 35R382	Fig 1		3 3/4	7/16	OFF, ON 1, ON 2, OFF		
	9						
-014 35R482	Fig 1		4 1/2	7/16	OFF, ON 1, ON 2, OFF		
	9						
-015	Fig 1		5 1/4	7/16	OFF, ON 1, ON 2, OFF		
	9						
-016	Fig 1		6	7/16	OFF, ON 1, ON 2, OFF		
	9						
-017	Fig 1		1 7/8	7/16	ON 1, ON 2, ON 1		
	9						
-018	Fig 1		2 5/8	7/16	ON 1, ON 2, ON 1		
	9						


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

TABLE I Type and switching characteristics – Continued

MIL-S-15291/6 Dash No Type designation	Detail ref	Dim "X"	Dim "Y"	Handle or shaft position	Circuit and spacer configuration rotor position, spacer locations, terminal marking and locations	Notes
-019	Fig 1	3 3/8	7/16	ON 1 OFF ON 2		
3SR3C2	9					
-020	Fig 1	4 1/8	7/16	ON 1 OFF ON 2		
	9					
-021	Fig 1	4 7/8	7/16	ON 1 OFF ON 2		
	9					
-022	Fig 1	5 5/8	7/16	ON 1 OFF ON 2		
	9					
-023	Fig 1	2 1/4	7/16	OFF ON 1 ON 2		
	9					
-024	Fig 1	3	7/16	OFF ON 1 ON 2		
	9					
-025	Fig 1	3 3/4	7/16	OFF ON 1 ON 2		
3SR3E2A	9					
-026	Fig 1	4 1/2	7/16	OFF ON 1 ON 2		
	9					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

TABLE I. Type and switching characteristics – Continued

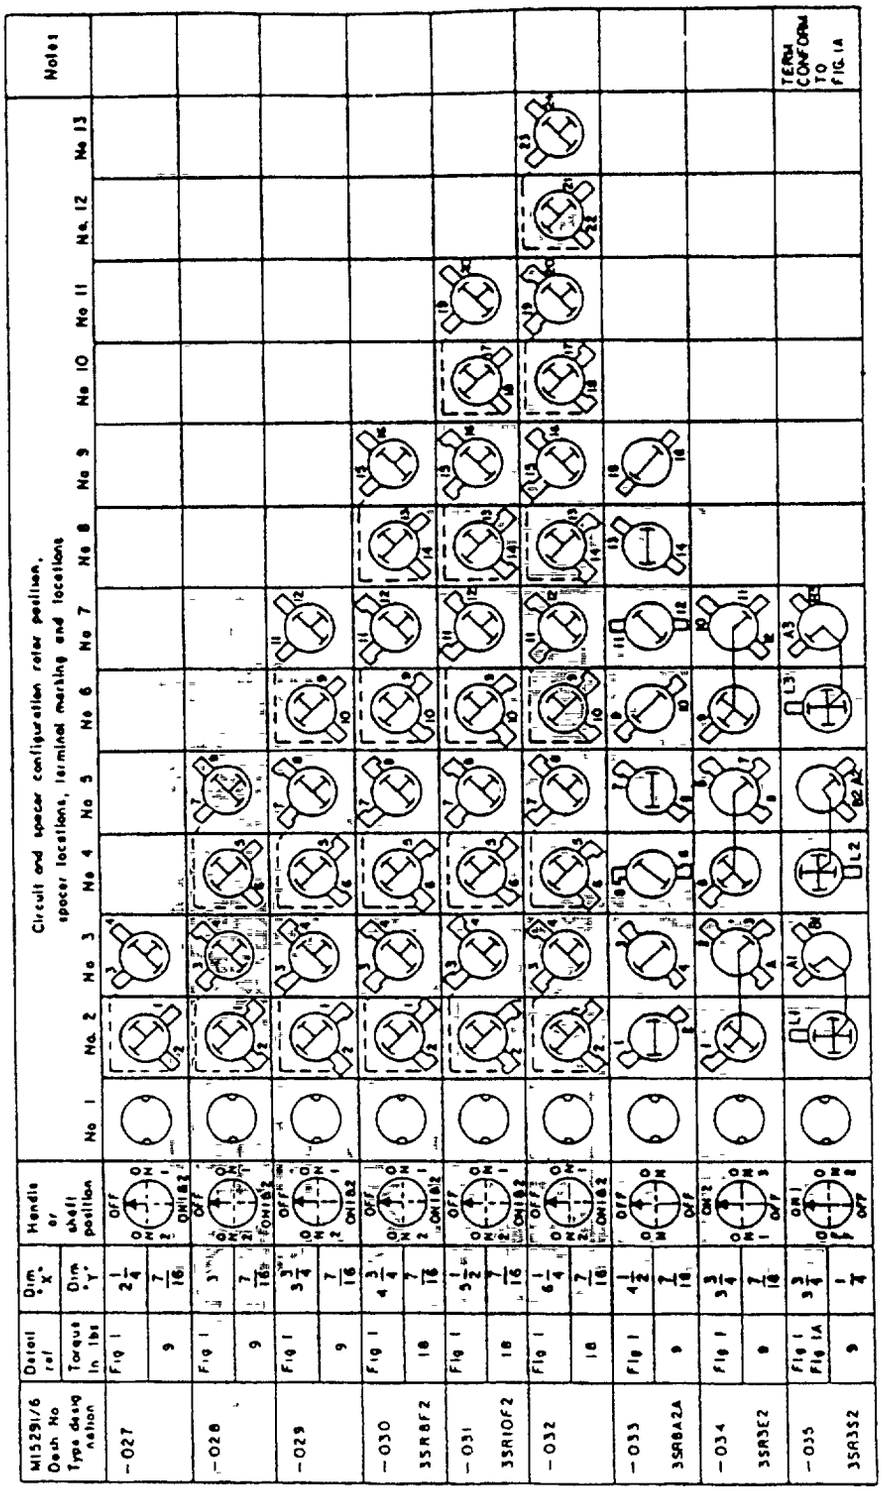

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Applicable specification:	MIL-S-15291
Dimensions and mounting	See figures 1 and 2
Switching characteristics	See table I
Angle of throw:	90 degrees
Switching action:	Snap action, reciprocating
Electrical and endurance ratings:	See table II
Stop strength (applicable to switches with stops):	100 inch-pounds
Vibration:	50 Hz, MIL-STD-167-1
Shock:	High impact, MIL-S-901
Insulation (spacers and decks):	Glass alkyd, MAI-60 (or MAI-30) in accordance with MIL-M-14
Contact resistance:	0.01 ohms maximum
Dielectric withstanding voltage:	2,000 Vrms
Insulation resistance:	200 megohms minimum
Temperature rise:	50 °C maximum
Contact material:	Rotor, phosphor bronze – Stationary contact, copper
Mounting screws:	.250-20UNC-2A (4) length and headstyle to suit application Screws not furnished.
Handle:	M1529/5-100.

TABLE II *Electrical and endurance ratings*

Tests	Current (amperes)	Voltage (volts)	Electrical operations (number of operations)	Test rate (operations per minute)	De-energized operations (number of operations)
Alternating current (rms)	30	500	20,000	30	10,000
Direct current	30	250	15,000	15	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

Terminal marking	Terminal markings shown in table I locates terminals as viewed from the front of the switch (handle end) Markings shall be stamped in rear surfaces of terminals, clear of the screw heads.

GENERAL INFORMATION:

Switches not covered by specification sheets.	Switches which are fabricated from standard parts, as used in qualified switches, but which do not comply with switches detailed herein with respect to circuit characteristics, switching action, mounting arrangement, and handle details may be acquired under this specification from contractors having qualification approval under this specification.
Extended ratings	Switches detailed herein have been tested and found satisfactory at the extended ratings listed in table III Reduced life expectancy must be anticipated for switches used at these increased voltage or current levels Tests under the conditions of table III are not required for qualification acceptance and they are not repeated routinely as for maintenance of qualification Supplemental evaluations and tests applicable to particular circuit requirements are recommended

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

TABLE III. *Extended ratings.*

Switching characteristics	AC 60 or 400 Hz											
	125 volts				250 volts				500 volts			
	Resistive or lamp load		Inductive load 0.75 p.f.		Resistive or lamp load		Inductive load 0.75 p.f.		Resistive or lamp load		Inductive load 0.75 p.f.	
	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations
All	30	20,000	30	20,000	30	20,000	30	20,000	30	20,000	30	20,000
C,E,F	40	6,000	40	6,000	--	----	--	----	--	----	--	----
A,B[1]	40	6,000	40	6,000	30	6,000	30	6,000	30	6,000	30	6,000
	DC											
	120 volts				250 volts				350 volts			
	Resistive or lamp load		Inductive load[2]		Resistive or lamp load		Inductive load[2]		Resistive or lamp load		Inductive load[2]	
	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations
All	30	13,000	25	6,000	15	13,000	--	---	--	---	--	---
A,B	30	15,000	25	6,000	25	6,000	25	6,000	15	6,000	15	6,000
A,B[3]	--	----	--	---	30	15,000	--	---	--	---	--	---

[1]Single pole break – all other ratings are based on breaking both sides of the line in accordance with figures 1 and 2 of MIL-S-15291


[2]0.08 henry for inductive circuit

[3]Switch with special arc snuffers

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

Sealed mounting


Switches listed in table I as having "Y" dimension not less than 7/16 inch can be mounted with a kit, figure 3, to effect a submersible seal (SBM 15) between switch and mounting panel. Panel drilling must comply with figure 4. Kits not supplied unless specified (see 6.2 of MIL-S-15291).

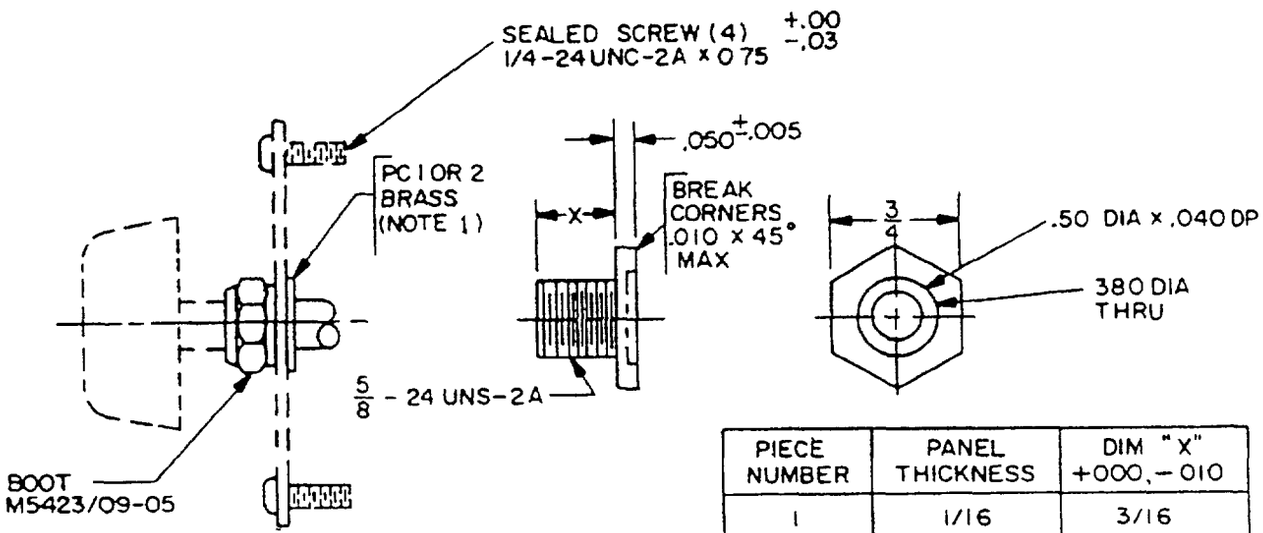

PIECE NUMBER	PANEL THICKNESS	DIM "X" +000, -.010
1	1/16	3/16
2	1/8	1/4

NOTE
1 Finish shall be zinc and dichromate, ASTM B 633

FIGURE 3 *Kit for panel seal mounting*

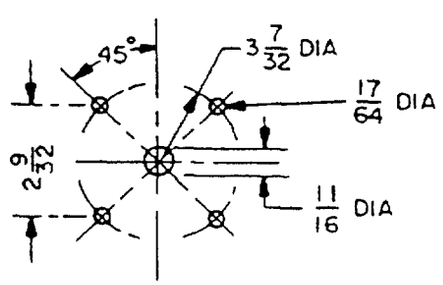

NOTE
1 Do not chamfer mounting holes Breaking 1/64 maximum permissible

FIGURE 4 *Panel drilling for mounting kit*

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.

APPLICATION AND ACQUISITION GUIDE: PIN and type designation cross reference shall be as shown in table IV.

TABLE IV *Application and acquisition guide.*

M15291/6 dash No	Type designation	For new or existing design	For re-placement	Circuit configuration
-001	-	X		A (off-on-off-on)
-002	-	X		A (off-on-off-on)
-003	3SR3A2	X		A (off-on-off-on)
-004	3SR4A2	X		A (off-on-off-on)
-005	-	X		A (off-on-off-on)
-006	3SR6A2	X		A (off-on-off-on)
-007	-	X		A (off-on-off-on)
-008	3SR8A2	X		A (off-on-off-on)
-009	3SR9A2	X		A (off-on-off-on)
-010	-	X		A (off-on-off-on)
-011	-	X		B (off-on 1-off-on 2)
-012	-	X		B (off-on 1-off-on 2)
-013	-	X		B (off-on 1-off-on 2)
-014	3SR4B2	X		B (off-on 1-off-on 2)
-015	-	X		B (off-on 1-off-on 2)
-016	-	X		B (off-on 1-off-on 2)
-017	-	X		C (on 1-on 2-on 1-on 2)
-018	-	X		C (on 1-on 2-on 1-on 2)
-019	3SR3C2	X		C (on 1-on 2-on 1-on 2)
-020	-	X		C (on 1-on 2-on 1-on 2)
-021	-	X		C (on 1-on 2-on 1-on 2)
-022	-	X		C (on 1-on 2-on 1-on 2)
-023	-	X		E (off-on 1-on 2-on 3)
-024	3SR2E2	X		E (off-on 1-on 2-on 3)
-025	3SR3E2A	X		E (off-on 1-on 2-on 3)
-026	-	X		E (off-on 1-on 2-on 3)
-027	-	X		F (off-on 1-on 1 & 2-on 2)
-028	-	X		F (off-on 1-on 1 & 2-on 2)
-029	-	X		F (off-on 1-on 1 & 2-on 2)
-030	3SR8F2	X		F (off-on 1-on 1 & 2-on 2)
-031	3SR10F2	X		F (off-on 1-on 1 & 2-on 2)
-032	-	X		F (off-on 1-on 1 & 2-on 2)
-033	3SR8A2A	X		A (off-on-off-on)
-034	3SR3E2	X		E (on 2-on 3-off-on 1)
-035	3SR3S2	X		S (on 1-on 2-off-off)

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity
Navy - SH
(Project 5930-N663-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:59Z
Check the source to verify that this is the current version before use.