INCH-POUND

MIL-S-15291/8A(SH)
22 July 1991
SUPERCEDING
MIL-S-15291/8(SH)
17 April 1981

MILITARY SPECIFICATION SHEET

SWITCHES, ROTARY, SNAP ACTION CLASS 6SR FRONT MOUNTED, BACK CONNECTED

Inactive for new design after 17 April 1981.
For new design use MIL-S-15291/9(SH)


This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-S-15291.

AMSC N/A FSC 5930

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

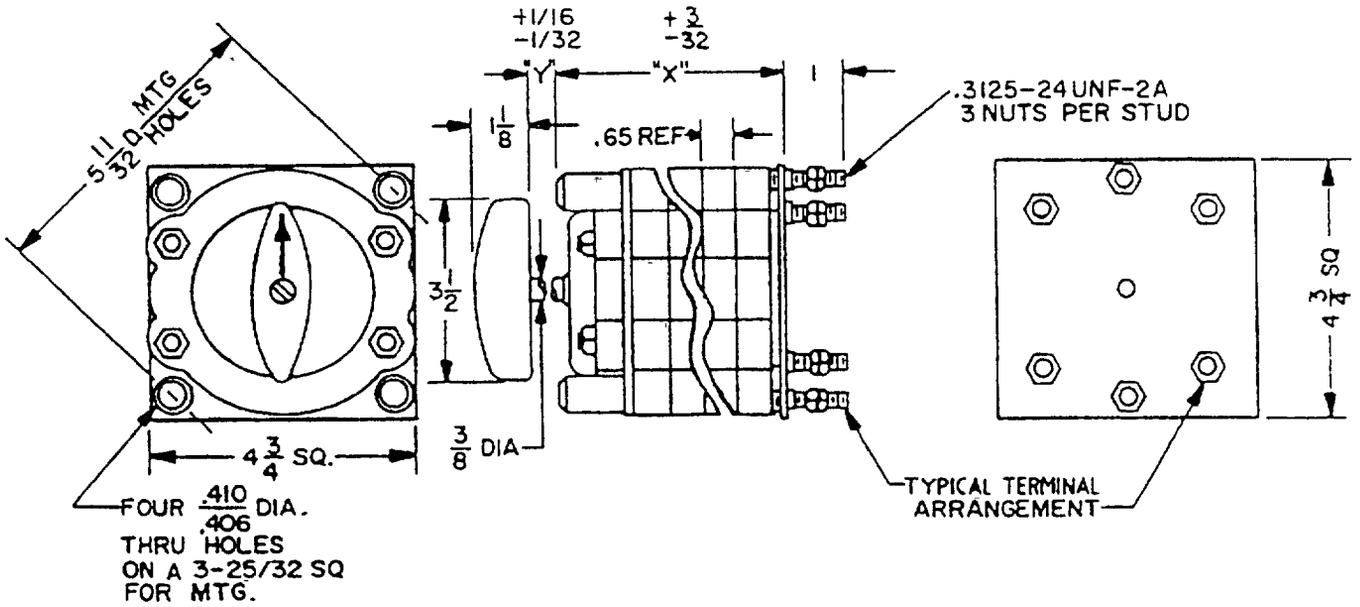

NOTES
1. Dimensions are in inches
2. Unless otherwise specified, tolerance is plus or minus 0.015

FIGURE 1 *Class 6SR switch (up to 6 studs).*


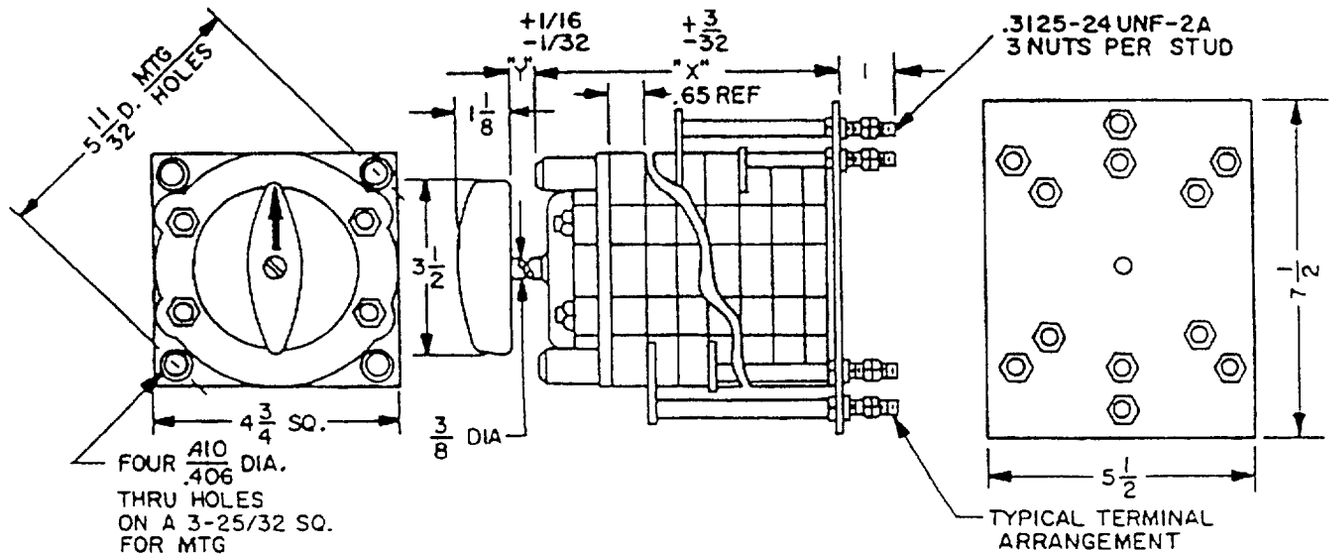


FIGURE 2 *Class 6SR switch (up to 12 studs)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

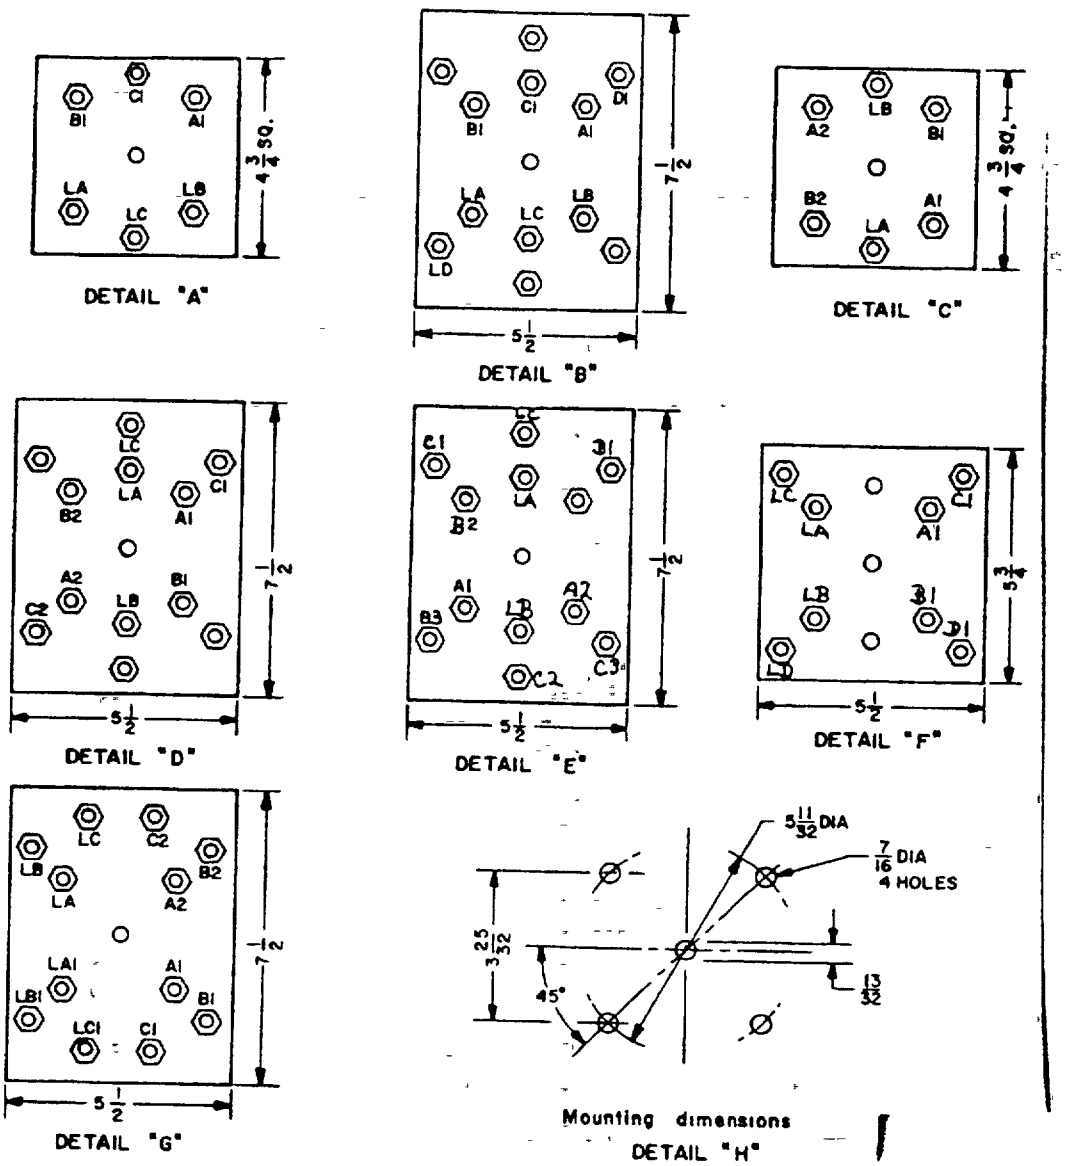

NOTE

1 Terminal studs viewed from rear

FIGURE 3. *Mounting dimensions and terminal stud locations*

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

TABLE I *Type and switching characteristics*

MIL5291/8 Dash No Type designation	Detail ref	Dim "X"	Dim "Y"	Handle or shaft position	Circuit and spacer configuration rotor position, spacer locations, terminal marking and locations									Notes
	Torque in-lbs				No 1	No 2	No 3	No 4	No 5	No 6	No 7	No 8	No 9	
-001	Fig 1 Detail A	3 7/16	7/16	OFF 0 N OFF		B1 LB	A1 LA							
6SR2A1	26													
-002	Fig 1 Detail A	4 3/32	7/16	OFF 0 N OFF		C1 LC	B1 LB	A1 LA						
6SR3A1	26													
-003	Fig 2 Detail B	4 3/4	7/16	OFF 0 N OFF		D1 LD	C1 LC	B1 LB	A1 LA					
6SR4A1	26													
-004	Fig 1 Det C	4 3/4	7/16	OFF 0 N 1 2 OFF		LB LD	B1 B2	LA	A2 A1					
6SR2B1	26													
-005	Fig 2 Det D	6 1/16	7/16	OFF 0 N 1 2 OFF		LC LD	C1 C2	LB	B2 B1	LA	A1 A2			
6SR3B1	26													
-006	Fig 2 Det E	4 3/4	7/16	OFF 0 N 3 1 ON 2		B1 LB	B2 B3	LA	A3 A2 A1					
6SR2E1	26													
-007	Fig 2 Det E	6 1/16	7/16	OFF 0 N 3 1 ON 2		LC LD	C1 C2 C3	LB	B1 B2 B3	LA	A3 A2 A1			
6SR3E1	26													
-008	Fig 2 Det F	4 3/4	7/16	OFF 0 N 2 1 1&2		D1 LD	C1 LC	B1 LB	A1 LA					
6SR4F1	26													
-009	Fig 2 Det G	6 1/16	7/16	OFF 0 N 2 1 1&2		C1 LC1	C2 LC	B1 LB1		A1 LA1				
6SR6F1	26													

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Applicable specification·	MIL-S-15291
Dimensions and mounting·	See figures 1 through 3
Switching characteristics.	See table I
Angle of throw:	90 degrees
Switching action·	Snap action, reciprocating
Electrical and endurance ratings	See table II
Stop strength (applicable to switches with stops)	100 inch-pounds
Vibration:	50 Hz, MIL-STD-167-1
Shock·	High impact, MIL-S-901
Insulation (spacers and decks).	Glass alkyd, MAI-60 (or MAI-30) per MIL-M-14
Contact resistance:	0.005 ohms maximum
Dielectric withstanding voltage·	2,000 Vrms
Insulation resistance:	200 megohms minimum
Temperature rise:	50 °C maximum
Contact material:	Rotor, phosphor bronze – Stationary contact, copper
Mounting bolts:	(2), 3/8 diameter, length, and headstyle to suit application. Bolts not furnished
Handle.	M15291/9-100.

TABLE II *Electrical and endurance ratings*

Tests	Current (amperes)	Voltage (volts)	Electrical operations (number of operations)	Test rate (operations per minute)	De-energized operations (number of operations)
Alternating current (rms)	60	500	6,000	10	4,000
Direct current	60	250	4,000	5	–

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

Terminal marking: Terminal marking shall be in accordance with details A through G, as specified in table I. Terminal markings in table I are shown as viewed from the front (handle end) of the switch

GENERAL INFORMATION:

Switches not covered by specification sheets: Switches which are fabricated from standard parts, as used in qualified switches, but which do not comply with switches detailed herein with respect to circuit characteristics, switching action, mounting arrangement, and handle details may be acquired under this specification from contractors having qualification approval under this specification

Extended ratings: Switches detailed herein have been tested and found satisfactory at the extended ratings listed in table III. Reduced life expectancy must be anticipated for switches used at these increased voltage or current levels. Tests under the conditions of table III are not required for qualification acceptance and they are not repeated routinely as for maintenance of qualification. Supplemental evaluations and tests applicable to particular circuit requirements are recommended.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

TABLE III. *Extended ratings.*

Switching characteristics	AC - 60 or 400 Hz											
	125 volts				250 volts				500 volts			
	Resistive or lamp load		Inductive load 0.75 p f.		Resistive or lamp load		Inductive load 0.75 p f.		Resistive or lamp load		Inductive load 0.75 p.f.	
	Amp	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations
All	60	6,000	60	6,000	60	6,000	60	6,000	60	6,000	60	6,000
E,F	75	3,000	75	3,000	---	---	---	---	---	---	---	---
A,B[1]	75	3,000	75	3,000	60	6,000	60	3,000	60	3,000	60	3,000

	DC											
	120 volts				250 volts				350 volts			
	Resistive or lamp load		Inductive load[2]		Resistive or lamp load		Inductive load[2]		Resistive or lamp load		Inductive load[2]	
	Amp	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations	Amp.	Operations
All	60	3,000	50	1,500	30	3,000	---	---	---	---	---	---
A,B	60	4,000	60	4,000	60	4,000	50	3,000	30	3,000	30	3,000

[1]Single pole break - all other ratings are based on breaking both sides of the line in accordance with figures 1 and 2 of MIL-S-15291

[2]0 04 henry for inductive circuit

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

APPLICATION AND ACQUISITION GUIDE: PIN and type designation cross reference shall be as shown in table IV

TABLE IV. *Application and acquisition guide*

M15291/8 dash No	Type designation	For replacement only In new design use M15291/9	Circuit configuration
-001	6SR2A1	-001	A (off-on-off-on)
-002	6SR3A1	-002	A (off-on-off-on)
-003	6SR4A1	-003	A (off-on-off-on)
-004	6SR2B1	-008	B (on 1-off-on 2-off)
-005	6SR3B1	-009	B (on 1-off-on 2-off)
-006	6SR2E1	-012	E (off-on 1-on 2-on 3)
-007	6SR3E1	-013	E (off-on 1-on 2-on 3)
-008	6SR4F1	-016	F (off-on 1-on 1 & 2-on 2)
-009	6SR6F1	-017	F (off-on 1-on 1 & 2-on 2)

Revision letters are not used to denote changes due to the extensiveness of the changes

Preparing activity:
Navy - SH
(Project 5930-N663-9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.