
INCH-POUND
MIL-S-15291/9A(SH)
22 July 1991
SUPERCEDING
MIL-S-15291/9(SH)
17 April 1981

MILITARY SPECIFICATION SHEET

SWITCHES, ROTARY, SNAP ACTION CLASS 6SR FRONT MOUNTED, SIDE CONNECTED

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation. MIL-S-15291.

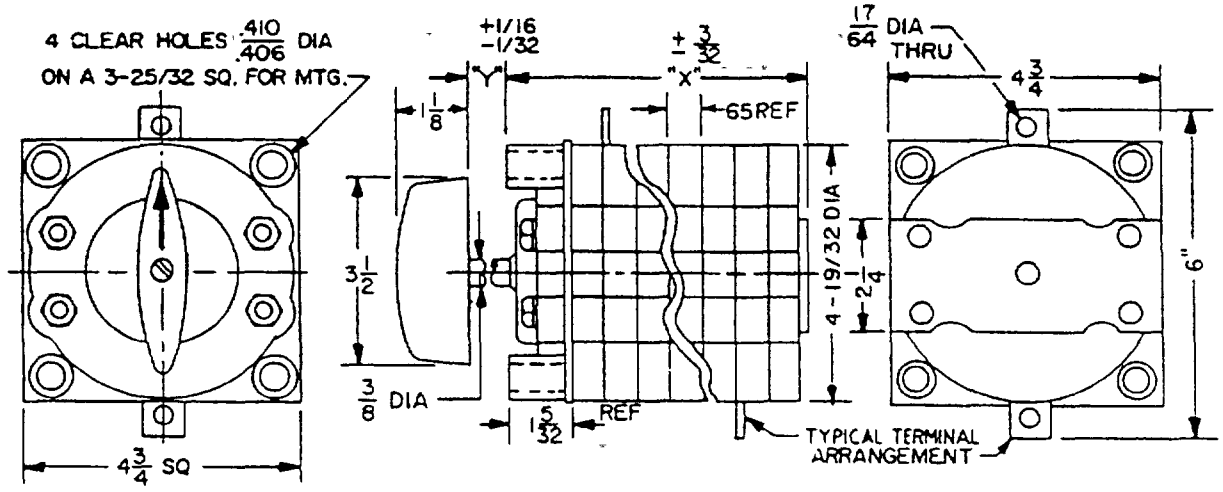

NOTES.
1 Dimensions are in inches
2 Unless otherwise specified, tolerance is plus or minus 0.015

FIGURE 1 *Class 6SR switch, front mounted, side connected*

AMSC N/A FSC 5930

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

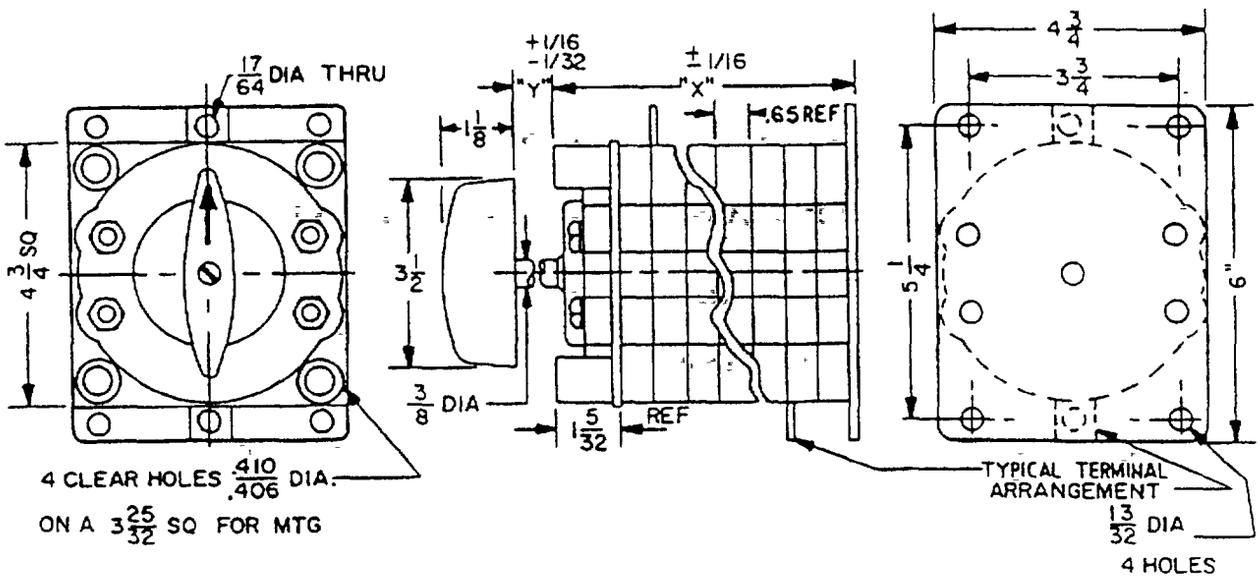


FIGURE 2. *Class 6SR switch, front mounted, side connected, with rear support (10 or more sections)*


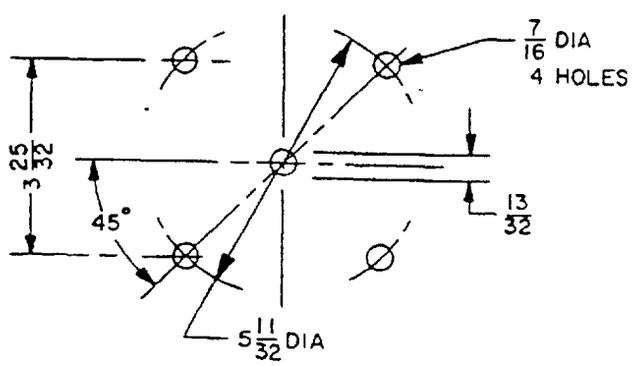


FIGURE 3 *Panel mounting dimensions*

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

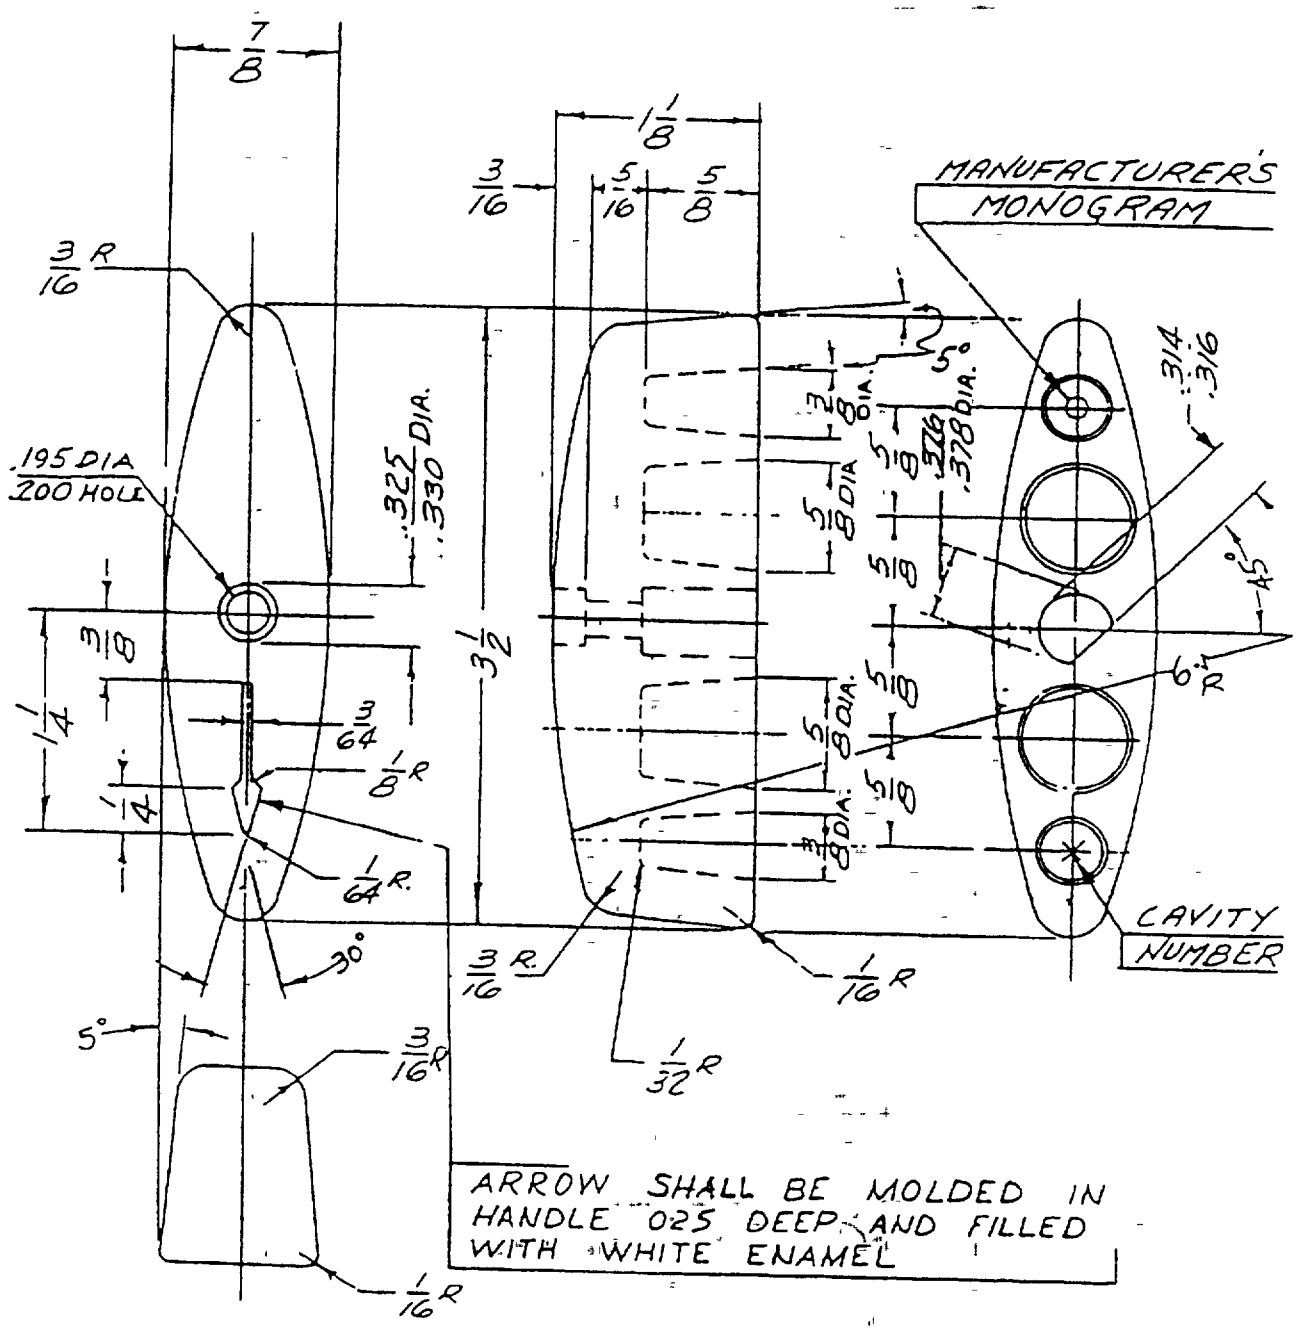

PIN M15291/9-100

FIGURE 4. *Handle*

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

TABLE I. *Type and switching characteristics*

MIL-S-15291/9 Dash No Type designation	Detail ref	Dim "X"	Dim "Y"	Handle or Shaft position	Circuit and spacer configuration rotor position, spacer locations, terminal marking and locations													Not
					No. 1	No 2	No 3	No 4	No. 5	No 6	No 7	No 8	No 9	No 10	No 11	No 12	No 13	
-001	Fig 1	$3\frac{3}{32}$	$\frac{7}{16}$	OFF O N OFF														
	32																	
-002	Fig 1	$3\frac{15}{16}$	$\frac{7}{16}$	OFF O N OFF														
	32																	
-003	Fig 1	$4\frac{9}{16}$	$\frac{7}{16}$	OFF O N OFF														
	32																	
-004	Fig 1	$5\frac{7}{32}$	$\frac{7}{16}$	OFF O N OFF														
	32																	
-005	Fig 1	$5\frac{7}{8}$	$\frac{7}{16}$	OFF O N OFF														
6SR6A2	32																	
-006	Fig 1	$7\frac{3}{16}$	$\frac{7}{16}$	OFF O N OFF														
6SR8A2	42																	
-007	Fig 2	$8\frac{1}{2}$	$\frac{7}{16}$	OFF O N OFF														
6SR10A2	42																	
-008	Fig 1	$4\frac{9}{16}$	$\frac{7}{16}$	OFF O N 1 2 OFF														
6SR2B2	32																	
-009	Fig 1	$5\frac{7}{8}$	$\frac{7}{16}$	OFF O N 1 2 OFF														
	32																	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

TABLE I *Type and switching characteristics – Continued*

MIL-S-15291/9 Dash No. Type designation	Detail ref	Dim "X"	Dim "Y"	Handle or shaft position	Circuit and spacer configuration rotor position, spacer locations, terminal marking and locations												Notes
					No 1	No 2	No 3	No 4	No 5	No 6	No 7	No 8	No 9	No 10	No 11	No 12	No 13	
-010	Fig 1	15/16	3 1/16	ON 1 OFF ON 2														
	32	7/16	7/16															
-011	Fig 1	9/32	3	OFF ON 1 ON 2														
	32	7/16	7/16															
-012	Fig 1	9/16	4	OFF ON 1 ON 2														
	32	7/16	7/16															
-013 6SR5E2	Fig 1	7/8	5	OFF ON 1 ON 2														
	32	7/16	7/16															
-014	Fig 1	7/32	7	OFF ON 1 ON 2														
	32	7/16	7/16															
-015	Fig 2	17/32	8	OFF ON 1 ON 2														
	32	7/16	7/16															

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

TABLE I. Type and switching characteristics – Continued

MIL-S-15291/9 Dash No Type designation	Detail ref / Torque in-lbs	Dim "X" / Dim "Y"	Handle or shaft position	Circuit and spacer configuration rotor position, spacer locations, terminal marking and locations													Notes
				No 1	No 2	No 3	No 4	No 5	No 6	No 7	No 8	No 9	No 10	No 11	No 12	No 13	
-016 6SR4F2	Fig 1 32	5 7/32 7/16	OFF ON 1&2														1
-017 6SR6F2	Fig 1 32	6 9/16 7/16	OFF ON 1&2														1
-018	Fig 2 42	7 27/32 7/16	OFF ON 1&2														1
-019	Fig 1 32	3 15/16 7/16	OFF														
-020	Fig 1 32	4 9/16 7/16	OFF														
-021	Fig 1 32	3 15/16 7/16	ON 1 ON 1														
-022	Fig 1 32	4 9/16 7/16	ON 1 ON 1														
-023 6SR3S2(a)	Fig 1 32	3 15/16 7/16	ON 1 OFF		B1 L1 A1	A2 L2 B2	B3 L3 A3										

[1] External jumpers not furnished

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Applicable specification:	MIL-S-15291
Dimensions and mounting:	See figures 1, 2, and 3
Switching characteristics:	See table I
Angle of throw:	90 degrees
Switching action:	Snap action, reciprocating
Electrical and endurance ratings	See table II
Stop strength (applicable to switches with stops):	100 inch-pounds
Vibration:	50 Hz, MIL-STD-167-1
Shock:	High impact, MIL-S-901
Insulation (spacers and decks):	Glass alkyd, MAI-60 (or MAI-30) in accordance with MIL-M-14
Contact resistance:	0.005 ohms maximum
Dielectric withstanding voltage:	2,000 Vrms
Insulation resistance:	200 megohms minimum
Temperature rise:	50 °C maximum
Contact material:	Rotor, phosphor bronze – Stationary contact, copper
Mounting bolts	(4) 3/8 diameter, length, and headstyle to suit application. Bolts not furnished.

TABLE II *Electrical and endurance ratings*

Tests	Current (amperes)	Voltage (volts)	Electrical operations (number of operations)	Test rate (operations per minute)	De-energized operations (number of operations)
Alternating current (rms)	60	500	6,000	10	4,000
Direct current	60	250	4,000	5	–

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

Terminal marking: Terminal markings shown in table I locate terminals as viewed from the front of the switch (handle end) Markings shall be stamped in rear surfaces of terminals, clear of the screw heads

GENERAL INFORMATION:

Switches not covered by specification sheets: Switches which are fabricated from standard parts, as used in qualified switches, but which do not comply with switches detailed herein with respect to circuit characteristics, switching action, mounting arrangement, and handle details may be acquired under this specification from contractors having qualification approval under this specification.

Extended ratings: Switches detailed herein have been tested and found satisfactory at the extended ratings listed in table III. Reduced life expectancy must be anticipated for switches used at these increased voltage or current levels. Tests under the conditions of table III are not required for qualification acceptance and they are not repeated routinely as for maintenance of qualification. Supplemental evaluations and tests applicable to particular circuit requirements are recommended.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

TABLE III. *Extended ratings*

Switching characteristics	AC – 60 or 400 Hz											
	125 volts				250 volts				500 volts			
	Resistive or lamp load		Inductive load 0.75 p.f.		Resistive or lamp load		Inductive load 0.75 p f.		Resistive or lamp load		Inductive load 0.75 p f.	
	Amp	Operations	Amp	Operations	Amp	Operations	Amp.	Operations	Amp	Operations	Amp	Operations
All	60	6,000	60	6,000	60	6,000	60	6,000	60	6,000	60	6,000
C,E,F	75	3,000	75	3,000	---	---	---	---	---	---	---	---
A,B1	75	3,000	75	3,000	60	3,000	60	3,000	60	3,000	60	3,000
	DC											
	120 volts				250 volts				350 volts			
	Resistive or lamp load		Inductive load2		Resistive or lamp load		Inductive load2		Resistive or lamp load		Inductive load2	
	Amp	Operations	Amp	Operations	Amp	Operations	Amp.	Operations	Amp	Operations	Amp.	Operations
All	60	3 000	50	1,500	30	3,000	---	---	---	---	---	---
A,B	60	4,000	60	4,000	60	4,000	50	3,000	30	3,000	30	3,000

[1]Single pole break – all other ratings are based on breaking both sides of the line in accordance with figures 1 and 2 of MIL-S-15291

[2]0 04 henry for inductive circuit

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

APPLICATION AND ACQUISITION GUIDE: PIN and type designation cross reference shall be as shown in table IV

TABLE IV *Application and acquisition guide*

M15291/9 dash No	Type designation	For new or existing design	For re-placement	Circuit configuration
-001	-	X		A (off-on-off-on)
-002	-	X		A (off-on-off-on)
-003	-	X		A (off-on-off-on)
-004	-	X		A (off-on-off-on)
-005	6SR6A2	X		A (off-on-off-on)
-006	6SR8A2	X		A (off-on-off-on)
-007	6SR10A2	X		A (off-on-off-on)
-008	6SR2B2	X		B (off-on 1-off-on 2)
-009	-	X		B (off-on 1-off-on 2)
-010	-	X		C (on 1-on 2-on 1-on 2)
-011	-	X		E (off-on 1-on 2-on 3)
-012	-	X		E (off-on 1-on 2-on 3)
-013	6SR3E2	X		E (off-on 1-on 2-on 3)
-014	-	X		E (off-on 1-on 2-on 3)
-015	-	X		E (off-on 1-on 2-on 3)
-016	6SR4F2	X		F (off-on 1-on 1 & 2-on 2)
-017	6SR6F2	X		F (off-on 1-on 1 & 2-on 2)
-018	-	X		F (off-on 1-on 1 & 2-on 2)
-019	-	X		H (on 1-off-on 2)
-020	-	X		H (on 1-off-on 2)
-021	-	X		J (on 1-on 2-on 1-on 2)
-022	-	X		J (on 1-on 2-on 1-on 2)
-023	6SR3S2(a)	X		S (see table I)

Revision letters are not used to denote changes due to the extensiveness of the changes

Preparing activity:
Navy - SH
(Project 5930-N663-10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.