
INCH POUND
MIL-DTL-15291/9B
6 February 2006
SUPERSEDING
MIL-S-15291/9A(SH)
22 July 1991

DETAIL SPECIFICATION SHEET

SWITCHES, ROTARY, SNAP ACTION CLASS 6SR FRONT MOUNTED, BACK CONNECTED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-DTL-15291.

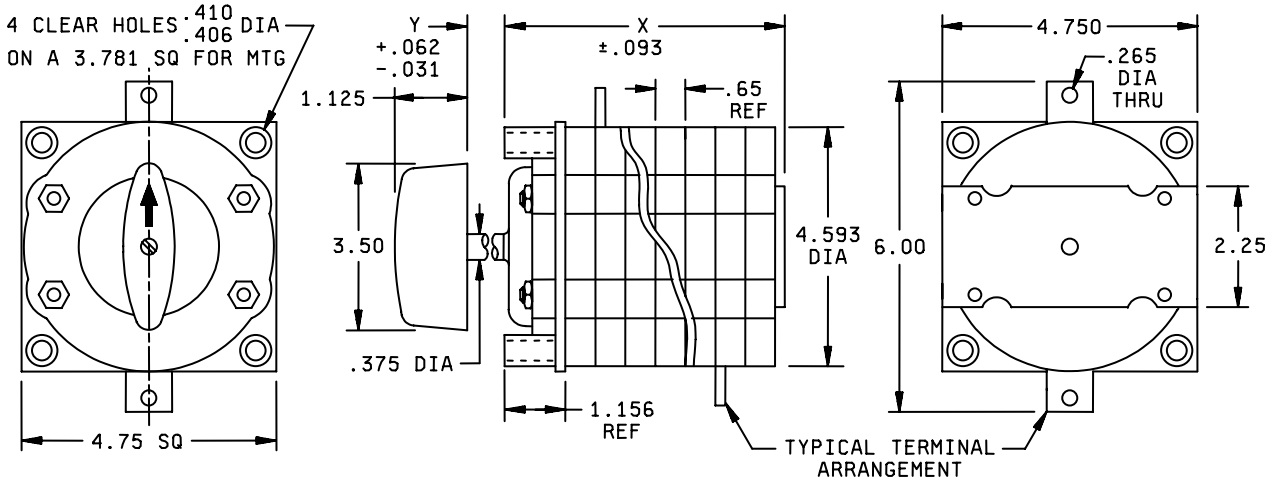

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± 0.015.

FIGURE 1. Class 6SR switch, front mounted, side connected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

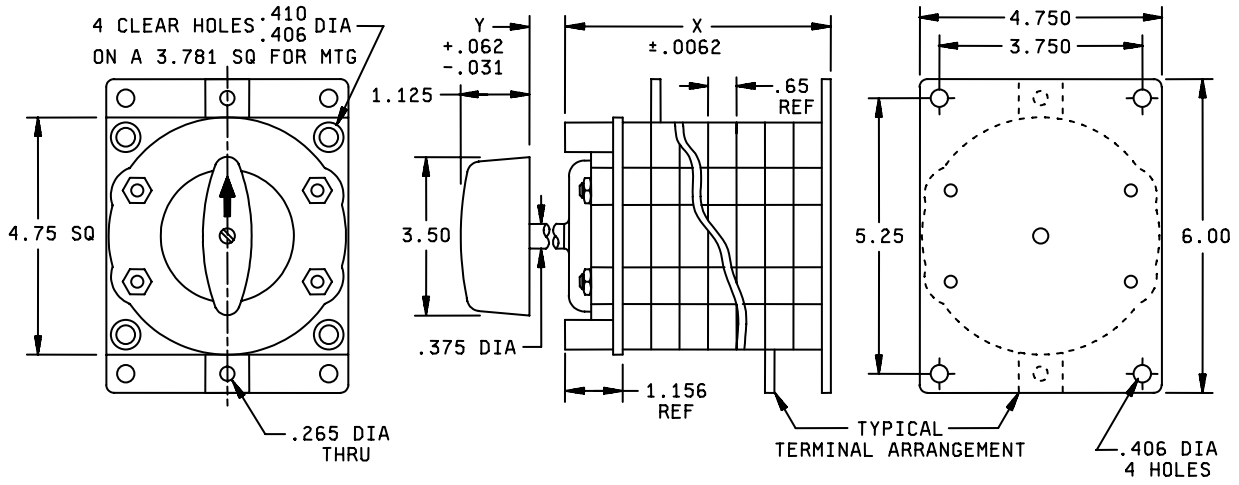


FIGURE 2. Class 6SR switch, front mounted, side connected, with rear support (10 or more sections).


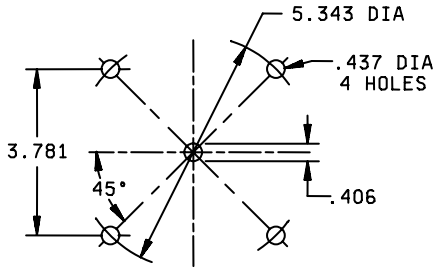


FIGURE 3. Panel mounting dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

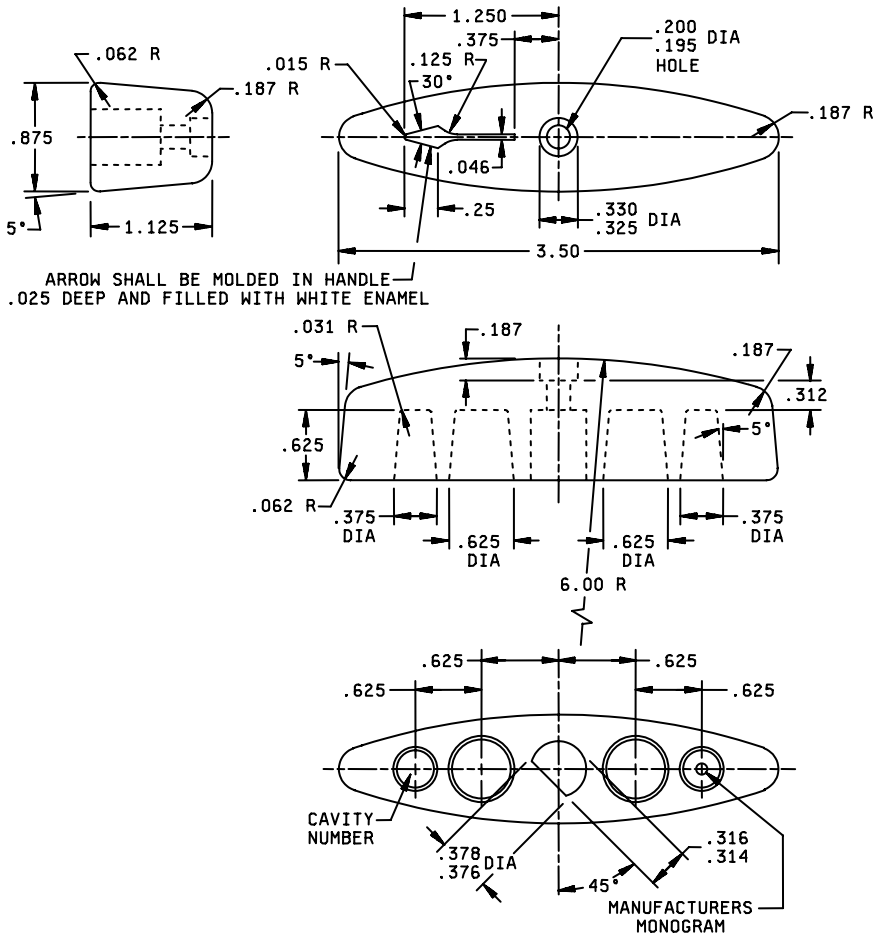

PIN M15291/9-100.

FIGURE 4. Handle.











Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

TABLE I. Type and switching characteristics.

M15291/9 DASH NO. TYPE DESIGNATION	DETAIL REF / TORQUE IN-LBS	DIM "X" / DIM "Y"	HANDLE OR SHAFT POSITION	CIRCUIT AND SPACER CONFIGURATIONS ROTOR POSITION, SPACER LOCATIONS, TERMINAL MARKING AND LOCATIONS											NOTES
				NO 1	NO 2	NO 3	NO 4	NO 5	NO 6	NO 7	NO 8	NO 9	NO 10	NO 11	
-001	FIG 1	3.093													
	32	.437													
-002	FIG 1	3.937													
	32	.437													
-003	FIG 2	4.562													
	32	.437													
-004	FIG 1	5.218													
	32	.437													
-005	FIG 1	5.875													
6SR6A2	32	.437													
-006	FIG 1	7.187													
6SR8A2	42	.437													
-007	FIG 2	8.500													
6SR10A2	42	.437													
-008	FIG 1	4.562													
6SR2B2	32	.437													
-009	FIG 1	5.875													
	32	.437													

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

TABLE I. Type and switching characteristics - Continued.

M15291/9 DASH NO. TYPE DESIGNATION	DETAIL REF / TORQUE IN-LBS	DIM "X" / DIM "Y"	HANDLE OR SHAFT POSITION	CIRCUIT AND SPACER CONFIGURATIONS ROTOR POSITION, SPACER LOCATIONS, TERMINAL MARKING AND LOCATIONS NO 1	NO 2	NO 3	NO 4	NO 5	NO 6	NO 7	NO 8	NO 9	NO 10	NO 11	NOTES
-010	FIG 1	3.937													
	32	.437													
-011	FIG 1	4.093													
	32	.437													
-012	FIG 2	4.562													
	32	.437													
-013	FIG 1	5.875													
6SR5E2	32	.437													
-014	FIG 1	7.218													
	32	.437													
-015	FIG 2 DETAIL E	8.531													
	32	.437													

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

TABLE I. Type and switching characteristics - Continued.

M15291/9 DASH NO. TYPE DESIGNATION	DETAIL REF / TORQUE IN-LBS	DIM "X" / DIM "Y"	HANDLE OR SHAFT POSITION	CIRCUIT AND SPACER CONFIGURATIONS ROTOR POSITION, SPACER LOCATIONS, TERMINAL MARKING AND LOCATIONS NO 1	NO 2	NO 3	NO 4	NO 5	NO 6	NO 7	NO 8	NO 9	NO 10	NO 11	NOTES
-016 6SR4F2	FIG 1 32	5.218 .437	OFF ON 1&2												SEE NOTE
-017 6SR6F2	FIG 1 32	6.562 .437	OFF ON 1&2												SEE NOTE
-018	FIG 2 42	7.843 .437	OFF ON 1&2												SEE NOTE
-019	FIG 1 32	3.937 .437	OFF												
-020	FIG 1 32	4.562 .437	OFF												
-021	FIG 1 32	3.937 .437	ON 1 ON 1												
-022	FIG 1 32	4.562 .437	ON 1 ON 1												
-023 6SR3S2(a)	FIG 1 32	3.937 .437	ON 1 OFF		B1 L1 A1	A2 L2 B2	B3 L3 A3								

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Applicable specification: MIL-DTL-15291.

Dimensions and mounting: See figures 1, 2, and 3.

Switching characteristics: See table I.

Angle of throw: 90 degrees.

Switching action: Snap action, reciprocating.

Electrical and endurance ratings: See table II.

Stop strength (applicable to switches with stops): 100 inch-pounds.

Vibration: 50 Hz, MIL-STD-167-1.

Shock: High impact, MIL-S-901.

Contact resistance: 0.005 ohms maximum.

Dielectric withstanding voltage: 2,000 V rms.

Insulation resistance: 200 megohms minimum.

Temperature rise: 50°C maximum.

Mounting screws: (4) .375 diameter, length, and headstyle to suit application. Bolts not furnished.

Terminal marking: Terminal markings shown in table I locate terminals as viewed from the front of the switch (handle end). Markings shall be stamped in rear surfaces of terminals, clear of the screw heads.

TABLE II. Electrical and endurance ratings.

Tests	Current (amperes)	Voltage (volts)	Electrical operations (number of operations)	Test rate (operations per minute)	De-energized operations (number of operations)
Alternating current (rms)	60	500	6,000	10	4,000
Direct current	60	250	4,000	5	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

GENERAL INFORMATION:

Switches not covered by specification sheets: Switches which are fabricated from standard parts, as used in qualified switches, but which do not comply with switches detailed herein with respect to circuit characteristics, switching action, mounting arrangement, and handle details may be acquired under this specification from contractors having qualification approval under this specification.

Extended ratings: Switches detailed herein have been tested and found satisfactory at the extended rating listed in table III. Reduced life expectancy must be anticipated for switches used at these increased voltage or current levels. Tests under the conditions of table III are not required for qualification acceptance and they are not repeated routinely as for maintenance of qualification. Supplemental evaluations and tests applicable to particular circuit requirements are recommended.

TABLE III. Extended ratings.

Switching characteristics	AC - 60 or 400 Hertz											
	125 volts				250 volts				500 volts			
	Resistive or lamp load		Inductive load 0.75 pF		Resistive or lamp load		Inductive load 0.75 pF		Resistive or lamp load		Inductive load 0.75 pF	
	Amp	Operations	Amp	Operations	Amp	Operations	Amp	Operations	Amp	Operations	Amp	Operations
All	60	6,000	60	6,000	60	6,000	60	6,000	60	6,000	60	6,000
C, E, F	75	3,000	75	3,000	---	---	---	---	---	---	---	---
A, B 1/	75	3,000	75	3,000	60	3,000	60	3,000	60	3,000	60	3,000
	DC											
	120 volts				250 volts				350 volts			
	Resistive or lamp load		Inductive, load 4/		Resistive or lamp load		Inductive, load 4/		Resistive or lamp load		Inductive, load 4/	
	Amp	Operations	Amp	Operations	Amp	Operations	Amp	Operations	Amp	Operations	Amp	Operations
All	60	3,000	50	1,500	30	3,000	---	---	---	---	---	---
A, B	60	4,000	60	4,000	60	4,000	50	3,000	30	3,000	30	3,000

1/ Single pole break - all other ratings are based on breaking both sides of the line in accordance with figures 1 and 2 of MIL-DTL-15291.
2/ 0.08 henry for inductive current.
3/ Switch with special arc snuffers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.

APPLICATION AND ACQUISITION GUIDE: PIN and type designation cross reference shall be as shown on table IV.

TABLE IV. Application and acquisition guide.

M15291/5 dash no.	Type designation	For new or existing design	For replacement	Circuit configuration
-001	---	X		A (off-on-off-on)
-002	---	X		A (off-on-off-on)
-003	---	X		A (off-on-off-on)
-004	---	X		A (off-on-off-on)
-005	6SR6A2	X		A (off-on-off-on)
-006	6SR8A2	X		A (off-on-off-on)
-007	6SR10A2	X		A (off-on-off-on)
-008	6SR2B2	X		B (off-on 1-off-on 2)
-009	---	X		B (off-on 1-off-on 2)
-010	---	X		C (on 1-on 2-on 1-on 2)
-011	---	X		E (off-on 1-on 2-on 3)
-012	---	X		E (off-on 1-on 2-on 3)
-013	6SR3E2	X		E (off-on 1-on 2-on 3)
-014	---	X		E (off-on 1-on 2-on 3)
-015	---	X		E (off-on 1-on 2-on 3)
-016	6SR4F2	X		F (off-on 1-on 1 and 2-on 2)
-017	6SR6F2	X		F (off-on 1-on 1 and 2-on 2)
-018	---	X		F (off-on 1-on 1 and 2-on 2)
-019	---	X		H (on 1-off-on 2)
-020	---	X		H (on 1-off-on 2)
-021	---	X		J (on 1-on 2-on 1-on 2)
-022'	---	X		J (on 1-on 2-on 1-on 2)
-023	6SR3S2(a)	X		S (see table I)

Referenced Documents:
MIL-DTL-15291
MIL-S-901
MIL-STD-167-1

Changes from previous issue: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Navy - SH
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-1906)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:00Z
Check the source to verify that this is the current version before use.