INCH-POUND

MIL-C-70954 (AR)
8 March 1993

MILITARY SPECIFICATION

Cable Assembly, Flexible, Repairable, Braided: 11829967

This specification is approved for use by the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements, examinations and tests for repairable braided shielded, flexible cable assemblies.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (See 6.2).

SPECIFICATIONS

MILITARY

MIL-I-631	-	Insulation, Electrical, Synthetic Resin Composition Nonrigid
MIL-C-3885	-	Cable Assemblies and Cord Assemblies, Electrical
MIL-C-7078	-	Cable, Electric, Aerospace Vehicle, General Specification for
MIL-F-13926	-	Fire Control Materiel, Manufacture and Inspection, General Specification for
MIL-I-23053	-	Insulation Sleeving, Electrical, Heat Shrinkable, General Specification for

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 6145

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:16Z
Check the source to verify that this is the current version before use.

MIL-I-23053/1	-	Insulation Sleeving, Electrical,Heat Shrinkable Polychloroprene, Flexible
MIL-C-27500	-	Cable, Power, Electrical & Cable Special Purpose, Electrical, Shielded and Unshielded, General Specification for
MIL-I-45607	-	Inspection Equipment, Acquisition, Maintenance and Disposition of
MIL-M-81531	-	Marking of Electrical Insulating Materials
MIL-I-81765	-	Insulating Components, Molded, Electrical, Heat Shrinkable, General Specification for

STANDARDS

MILITARY

MIL-STD-109	-	Quality Assurance Terms and Definitions
MIL-STD-202	-	Test Methods for Electronic and Electrical Component Parts
MIL-STD-810	-	Environmental Test Methods and Engineering Guidelines

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS (See 6.4)

US ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

11829967	-	Braided Cable Assembly, Flexible, Repairable, General Specification for
11834405	-	Wrap, Vapor Barrier, Metallized
12590877	-	Requirements for Soldering Electrical and Electronic Assemblies

SPECIAL PACKAGING INSTRUCTIONS

PS 11829967 - Packaging of Braided Cable Assembly

(Copies of drawings, publications and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:16Z
Check the source to verify that this is the current version before use.

2.2 Order of precedence. In the event of conflict between the text of this document and the references cited herein the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

3.1.1 Construction and assembly. The completed cable assembly shall conform to the following construction and assembly requirements.

3.1.1.1 Wiring. Routing wiring and cable breakouts of the assembly shall be in accordance with the applicable cable drawing.

3.1.1.2 Vapor barrier. As specified on the applicable drawing, each cable assembly shall be spiral wrapped with a 25% minimum overlap utilizing either metallized vapor barrier wrap (metal side in contact with the braid) in accordance with 11834405, or tape per specification MIL-I-631.

3.1.1.3 Braid requirements. Each cable assembly shall be protected as specified by applicable drawing with either a single or a double braid shield to form a braid pattern in accordance with MIL-C-7078 and shall exhibit a minimum coverage of 95% in accordance with applicable braiding drawings. The braid shall be tin coated copper wire. Braiding shall be continuous and free from any splices.

3.1.1.3.1 Braid coverage. Braiding for measured diameter shall conform to data supplied in applicable braiding drawings. Actual cable core diameter shall be determined during manufacturing. One or two layers of braiding shall be used in cable construction per applicable assembly drawing. The wire braid shall have the number of carriers and ends shown in drawing. Shield coverage for each layer of braid (and for branched cables, each layer of braid in each branch) shall be determined by the following formula:

Where $K = (2F - F^2)\ 100$

K = Percent coverage

F = EPd/SIN A

P = Picks per inch of cable length (number of carriers in either direction contained in 1 inch of the braid measured parallel to the axis of the finished cable)

A = Angle of braid with axis of cable

E = Number of strands per carrier

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:16Z
Check the source to verify that this is the current version before use.

d = Diameter of one of the round shield strands

$$\text{TAN } A = \frac{2\pi (D + 2d) P}{C}$$

D = Diameter of cable under shield
C = Number of carriers

3.1.1.4 Outer jacket. Heat shrinkable polychloroprene shall be in accordance with MIL-I-23053/1, class 2 and also as specified in the applicable assembly drawing.

3.1.1.5 Fittings. Thermofit boots and transitions shall conform to the requirements of MIL-I-81765. Themofit tubing shall be in accordance with MIL-I-23053/1, class 2 and also as specified in the applicable assembly drawing.

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on applicable drawings, all associated drawings, and with all requirements specified in applicable specifications and standards. Where applicable, the cable assembly shall meet the requirements of MIL-F-13926 and MIL-M-81531, where applicable, as follows:

a. Dimensions and tolerances
b. Inorganic protective surface finishings
c. Part identification and marking
d. Workmanship

3.3 Environmental service condition.

3.3.1 Vibration. The cable assembly shall not suffer damage and shall meet the requirements of 3.4 and 3.5 herein after being subjected to the vibration tests per MIL-STD-810, Method 514, Procedure 1, Category 8. The vibration test shall be continuous for 2 hours along each of three mutually perpendicular axes. The vibration shall be equivalent to track-laying vehicle operational vibration as defined by MIL-STD-810 narrowband random-on-random data for equipment installed on the deck of the M113 armored personnel carrier. Rigid mount connectors and junction hardware to vibration table and coil cable into same diameter specified for cold bend test (MIL-C-27500, Table IX) and suspend above table.

3.3.2 Temperature.

3.3.2.1 Operating. The cable assembly shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between -40 degrees C and +49 degrees C.

3.3.2.2 Non-operating (storage). The cable assembly shall not suffer permanent damage when subjected to the constant temperature extremes of -40 degrees C for a period of 24 hours and +71 degrees C for a period of 4 hours (after temperature stabilization), and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:16Z
Check the source to verify that this is the current version before use.

3.3.3 Humidity (non-operating). The cable assembly shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative humidity in excess of 95% for a period of 10 days.

3.3.4 Cold bend. The insulation, rubber jacket, tubing, boots, transitions, and ink markings shall not crack or suffer damage when tested as specified in cold bend test on MIL-C-27500 at a temperature of -55 C ± 5 C.

3.3.5 Pull. The cable assembly shall meet the requirements of 3.4 and 3.5, after being subjected to the pull test as specified in MIL-C-3885.

3.4 Electrical. Each conductor of the cable assembly shall be electrically continuous between the correct terminations as specified on the schematic diagram of the applicable cable assembly. There shall be no indication of discontinuity when each basic wire is subjected to a continuity test of 0.1 Adc with a maximum voltage drop of .03 Vdc with the load applied.

3.5 Performance.

3.5.1 Time domain reflectometer (TDR). There shall be no reflection of greater than 200 MP peak amplitude caused by the cable under test as read on oscilloscope display. Refer to figure 1.

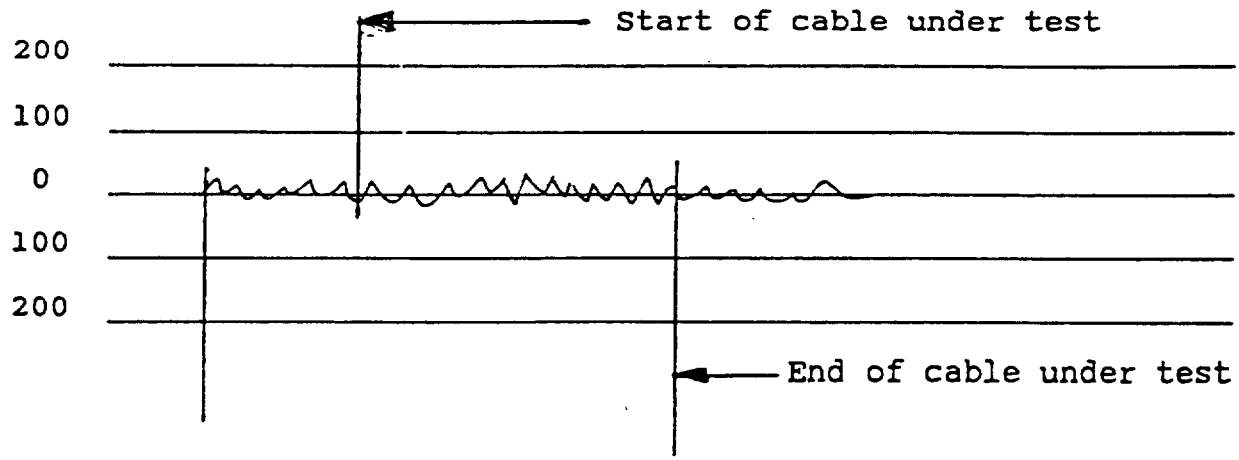


Figure 1. Time domain reflectometer test.

3.5.2 Dielectric withstanding voltage. The cable assembly shall be tested in accordance with MIL-STD-202, Method 301, except that the test voltage will be 1000 Vdc for cable, shielded and unshielded, and a test voltage of 500 Vdc for coax and triax cables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:16Z
Check the source to verify that this is the current version before use.

3.5.3 Insulation resistance. The cable assembly shall exhibit a minimum of 100 mega-ohms when tested in accordance with MIL-STD-202, Method 302, test condition B.

3.6 IDENTIFICATION

3.6.1 Marking All parts shall be marked in accordance with MIL-M-81531.

3.6.2 Marking durability. The markings on the cable assembly shall be legible and durable under all conditions when subjected to 3.3 (Environmental Service Conditions).

3.6.3 Supplier's trademark or symbol. Mark or symbol may also be used for orientation marking.

3.6.4 Cable marker application. Mark cable number, part number and manufacturing date on cable marker to appear along horizontal axis. Cut cable marker length to overlap cable circumference by 10%. Wrap cable marker snug around cable and press overlap in position approximately as shown on drawing without obscuring data. Use heat gun to fuse marker to cable.

3.7 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection in accordance with the technical provisions herein (see 4.3).

3.8 Soldering. All soldering shall be in accordance with the requirements of Note 2 of Drawing 12590877.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of Sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practive to ascertain conformance to requirements, however, this does not authorize submission of known

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:16Z
Check the source to verify that this is the current version before use.

defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2. General provisions. Unless otherwise specified herein, the provisions of MIL-F-13926 apply and form a part of this specification. Reference shall be made to MIL-STD-109 to define quality assurance terms used herein.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Special sampling inspection (see 4.5) (if required).

4.2.1 Inspection conditions. Unless otherwise specified, all examinations and tests shall be conducted at the following standard ambient conditions:

a.	Temperature	+16 deg to +32 deg C
b.	Relative humidity	90% RH Max.
c.	Pressure	700 to 815 mmHg

4.3 First article inspection.

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provisions of 4.3.2. The first article sample shall consist of the assemblies, components and test specimens listed below in the quantities indicated.

4.3.2 Inspections to be performed. As determined by the Government, the first article assemblies, components and test specimens may be subjected to any or all of the examinations and tests specified in Table I herein and be inspected for compliance with any or all requirements of the applicable drawings.

4.3.3 Rejection. If any assembly, component or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate inspection upon any failure of an assembly, component or test specimen to comply with any of the requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:16Z
Check the source to verify that this is the current version before use.

TABLE I. First article test
(100% Inspection)

Characteristic		Requirement	Test Procedure
Critical:		None	N/A
Major:			
101.	Construction and assembly	3.1.1	Visual
102.	Wiring	3.1.1.1	Visual
103.	Vapor barrier	3.1.1.2	4.7.4.1
104.	Braid requirement	3.1.1.3	4.7.4.2
105.	Braid coverage	3.1.1.3.1	4.7.4.3
106.	Outer jacket	3.1.1.4	4.7.4.4
107.	Fittings	3.1.1.5	4.7.4.5
108.	Vibration	3.3.1	4.7.1.1
109.	Temperature	3.3.2	4.7.1.2
110.	Humidity	3.3.3	4.7.1.3
111.	Cold Bend	3.3.4	4.7.1.4
112.	Pull	3.3.5	4.7.1.5
113.	Electrical	3.4	4.7.2
114.	Performance	3.5	4.7.3
Minor:			
201.	Identification	3.6	Visual

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. The term "inspection lot" is defined as a homogeneous collection of units of product from which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions. All material shall comply with the homogeniety criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:16Z
Check the source to verify that this is the current version before use.

4.4.2 Examinations and tests.

4.4.2.1 Components, assemblies and subassemblies.

a. Classification of characteristics. Quality conformance examinations and tests are specified in the following Classification of Characteristics paragraphs. The contractor's quality program or detailed inspection system shall provide assurance of compliance of all characteristics with the applicable drawing and specification requirements utilizing as a minimum the conformance criteria specified.

b. Alternative quality conformance provisions. Unless otherwise specified herein or provided for in the contract, alternative quality conformance procedures, methods or equipment, such as statistical process control, tool control, other types of sampling plans, etc., may be used by the contractor when they provide, as a minimum, the level of quality assurance required by the provisions herein. Prior to applying such alternative procedures, methods or equipment, the contractor shall describe them in a written proposal submitted to the Government for evaluation (see 6.6). When required, the contractor shall demonstrate that the effectiveness of each proposed alternative is equal to or better than the specified quality conformance provision(s) herein. In case of dispute as to whether the contractor's proposed alternative(s) provides equivalent assurance, the provisions of this specification shall apply. All approved alternative provisions shall be specifically incorporated into the contractor's quality program or inspection system, as applicable.

4.4.2.2 Final acceptance inspection. Subsequent to first article approval, examinations and tests related to Section 3 herein shall be performed in accordance with the sampling plans specified in 4.4.2.3 herein. Examination and test for packaging and marking shall be in accordance with Section 5 herein. The tabulated classification of defects in 4.4.2.3 shall constitute the minimum inspection to be performed by the contractor after first article approval and prior to Government acceptance or rejection by item or lot.

4.4.2.3 Functional tests. The tests in Table II shall be performed on a 100% basis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:16Z
Check the source to verify that this is the current version before use.

TABLE II. Functional tests.
(100% Inspection)

Characteristic	Requirement	Test Procedure
Critical:	None	N/A
Major:		
101. Electrical	3.4	4.7.2
102. Performance	3.5	4.7.3
Minor:		
201. Identification	3.6	Visual

4.5 Special sampling. One cable assembly out of the first 50 produced and one out of each 100 produced thereafter shall be selected at random. The sample shall have met the requirements and tests of Table II and shall then meet the tests in Table III. Unless otherwise specified in the contract, the items shall be returned to the lot upon successful completion of testing.

TABLE III. Special sampling.

Characteristic	Requirement	Test Procedure
Critical:	None	N/A
Major:		
103. Vapor barrier	3.1.1.2	4.7.4.1
104. Braid requirement	3.1.1.3	4.7.4.2
105. Braid coverage	3.1.1.3.1	4.7.4.3
106. Outer jacket	3.1.1.4	4.7.4.4
107. Fittings	3.1.1.5	4.7.4.5
108. Vibration	3.3.1	4.7.1.1
109. Temperature	3.3.2	4.7.1.2
110. Humidity	3.3.3	4.7.1.3
111 Cold Bend	3.3.4	4.7.1.4
112. Pull	3.3.5	4.7.1.5
Minor:	None	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:16Z
Check the source to verify that this is the current version before use.

4.5.1 Failure of sample. Should any one item of a special sampling fail to meet any of the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections to all production since the last test, as well as, to current production has been accomplished in accordance with the provisions of the contract.

4.6 Inspection equipment.

4.6.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.6.2 Contractor-furnished inspection equipment.

4.6.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number in specifications or QAPs forming a part of the contract shall be supplied by the contractor in accordance with the design specified. The contractor may, however, propose alternatives to Government designs for approval in accordance with 6.3.

4.6.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Methods of Inspection" specified in 4.7 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926 whenever Government designs are not specified (see 4.6.2.1). Since tolerance of test equipment is normally considered to be within 10% of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90% of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment. Contractor inspection equipment designs shall be submitted for approval in accordance with 6.3.

4.6.2.3 Test equipment. In conjunction with 4.6.2.1 and 4.6.2.2, the test equipment listed in Table IV (Test equipment list) or equivalent shall be used in the performance of the applicable test methods and procedures as specified in 4.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:16Z
Check the source to verify that this is the current version before use.

TABLE IV. Test equipment list.

Item Number	Name of Test	Description
1. TDR Cable Tester	TDR	Tektronix 1502
2. BNC/TNC Terminations	TDR	Impedance A/R
3. Adapter Cable	TDR	Impedance A/R

4.7 Methods of inspection.

4.7.1 Environmental. Environmental tests shall be conducted in accordance with the test conditions, general test performance guidance and individual test methods of MIL-STD-810, except as specified herein. Test facilities, chambers and apparatus used in conducting the tests contained in this specification shall be capable of meeting the conditions required.

4.7.1.1 Vibration. The test shall be performed as specified in Method 514, Category 8, Procedure I, of MIL-STD-810 and paragraph 3.3.1 herein. The cable assembly shall be attached to the vibration table. After vibration the cable assembly shall be tested as specified in 4.7.2 and 4.7.3 herein to determine compliance with 3.3.1.

4.7.1.2 Temperature.

4.7.1.2.1 High (operating and non-operating). This test shall be performed as specified in Procedures I and II, Method 501, of MIL-STD-810 with constant temperature extremes as specified in 3.3.2. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.2.

4.7.1.2.2 Low (operating and non-operating). This test shall be performed as specified in Procedures I and II, Method 502, of MIL-STD-810 with constant temperature extremes as specified in 3.3.2. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.2.

4.7.1.3 Humidity (non-operating). This test shall be performed in accordance with Procedure III, Method 507, of MIL-STD-810 except that in Step 7, checkout shall be performed at the conclusion of the test only, with the item at standard ambient conditions. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.3.

4.7.1.4 Cold bend. This test shall be performed in accordance with MIL-C-27500 at a temperature of -55 degrees C $\pm$ 5 degrees C. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:16Z
Check the source to verify that this is the current version before use.

4.7.1.5 Pull. This test shall be performed in accordance with MIL-C-3885. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.5.

4.7.2 Electrical. Continuity shall be inspected by standard measuring equipment and visual examination for compliance with 3.4.

4.7.3 Performance. The selected cable assembly shall be tested as specified in 4.7.3.1 through 4.7.3.3 to determine compliance with 3.5.1.

4.7.3.1 Time domain reflectometer.

4.7.3.1.1 Test set-up. Set TDR control as follows:

Power	- External (120V AC)
Reflection MP/Div	- 50
Feet/Div	- X1
Cable Dielectric	- Solid/Poly
Position & Distance	- Set to convenient reference on scope display

The cable under test is inserted between TDR input cable and proper termination cable adapter.

4.7.3.1.2 Test procedure. The selected cable assembly shall be tested as specified in 4.7.3.1.1 to determine compliance with 3.5.1.

4.7.3.1.3 Dielectric withstanding voltage tests. The cable assembly shall be subjected to the dielectric withstanding voltage test as specified by paragraph 3.5.2 herein, except that the test voltage shall be 1000 V.D.C. for cable, shielded and unshielded and a test voltage of 500 V.D.C. for coax and triax cables, using a suitable cable tester.

4.7.3.1.4 Insulation resistance. The cable assembly shall be subjected to the insulation resistance test specified by paragraph 3.5.3.

4.7.3.1.5 Test and inspection data. Copies of all production, acceptance, and environmental test data and test results shall be available to the procuring activity for a period of three (3) years.

4.7.4 Materials.

4.7.4.1 Vapor barrier. The cable assembly vapor barrier shall be visually inspected and tested as specified in applicable drawing 11834405 and specification MIL-I-631 to determine compliance with 3.1.1.2.

4.7.4.2 Braid requirement. The cable assembly braid coverage requirement shall be visually inspected and tested as specified in associated drawings in accordance with MIL-C-7078 to determine compliance with 3.1.1.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:16Z
Check the source to verify that this is the current version before use.

4.7.4.3 Braid coverage. The cable assembly braid coverage shall be visually inspected and tested as specified in applicable drawings to meet requirements specified in formula to determine compliance with 3.1.1.3.1.

4.7.4.4 Outer jacket. The cable assembly outer jacket shall be visually inspected and tested as specified in applicable drawings and in accordance with MIL-I-23053 to determine compliance with 3.1.1.4.

4.7.4.5 Fittings. The cable assembly fittings shall be visually inspected for coverage and tested as specified in applicable drawings in accordance with MIL-I-81765 and MIL-I-23053 to determine compliance with 3.1.1.5.

4.8 Soldering. Soldering processes shall be inspected by certified inspectors to the requirements and acceptance criteria of Note 2 of drawing 12590877 as specified in 3.8.

5. PACKAGING

5.1 General. Preservation, packing, and marking shall be in accordance with Packaging Data Sheet of applicable drawing.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. These cables are used on the Vulcan Air Defense System.

6.2 Acquisition requirements. Procurement documents shall specify the following:

a. Title, number and date of this specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1).
c. Applicable stock number.
d. First Article Sample requirements.
e. Packaging requirements, if other than specified in Section 5.
f. Serialization requirements, if applicable.
g. Certification of conformance for each lot or shipment of product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:16Z
Check the source to verify that this is the current version before use.

6.3 Submission of contractor inspection equipment designs for approval. Submit two copies of designs as required to: Commander, U.S. Army ARDECM, Attn: SMCAR-QAF-I, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament Research, Development and Engineering Center (ARDEC), may also include drawings prepared by, and identified as, U.S. Army Armament Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

6.5 Subject term (key word) listing.

Vulcan Air Defense System (VADS)
Product Improved Vulcan Air Defense System (PIVADS)
Fire Control System
Time Domain Reflectometer

6.6 Submission of alternative quality conformance provisions. Unless otherwise specified in the contract, proposed alternative quality conformance provisions will be submitted by the technical activity responsible for the preparation of this specification.

Custodian
Army-AR

Preparing activity:
Army-AR

(Project 6145-A063)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:16Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-70954	930308

3. DOCUMENT TITLE: CABLE ASSEMBLY, FLEXIBLE, REPAIRABLE, BRAIDED: 11829967

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
U.S ARMY ARDEC STANDARDIZATION OFFICE	(1) Commercial 201-724-6626	(2) AUTOVON DSN-880-6662
c. ADDRESS (Include Zip Code) ATTN: SMCAR-BAC-S PICATINNY ARSENAL, NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198/290

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:16Z
Check the source to verify that this is the current version before use.