MIL-C-83473A(USAF)
19 March 1982
SUPERSEDING
MIL-J-83473 (USAF)
1 March 1976

MILITARY SPECIFICATION

CAP, EXTREME COLD WEATHER, HGU-38/P

This specification is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of cold weather cap. The cap is designated HGU-38/P.

1.2 Sizes. The cap shall be furnished in one of the following sizes as specified (see 6.2):

Extra small	6-5/8
Small	7
Medium	7-1/4
Large	7-1/2
Extra large	7-3/4

2. APPLICABLE DOCUMENTS

* 2.1 Government documents

2.1.1 Specifications and standards. Unless otherwise specified the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-285	Thread, Polyester
UU-P-268	Paper, Kraft, Wrapping
DDD-L-20	Label: for Clothing, Equipage, and Tentage (General Use)
PPP-F-320	Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: ASD/ENESS, Wright-Patterson AFB, OH 45433 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:15Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-C-368	Cloth , Satin, Rayon and Cloth, Twill, Rayon
MIL-C-6590	Cloth, Pile (Synthetic Mouton, Knitted)
MIL-F-10884	Fasteners, Snap
MIL-G-16491	Grommet, Metallic
MIL-B-17757	Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-B-41826	Batting, Synthetic Fibers: Polyester, (Quilted and Upquilted)
MIL-C-41831	Cloth, Knitted, Nylon, Raschel
MIL-C-83453	Cloth, Twill, Nylon, Warp, Rayon Filling

STANDARDS

FEDERAL

FED-STD-191	Textile Test Methods
FED-STD-751	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MS27980	Fasteners, Snap, Style 2 (Regular Wire Spring Clamp Type)

(Copies of specifications, standards, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

* 2.2 Other publication. The following document forms a part of this specification to the extent specified herein. The issues of the documents which are indicated as DOD adopted shall be the issue listed in the current DODISS and the supplement thereto, if applicable.

The Color Association of the United States, Inc.

Department of Defense (DOD) Standard Color Card of Official Standardized Shades for Sewing Threads 1968

(Copies of this publication can be obtained from The Color Association of the United States, Inc., 200 Madison Avenue, New York, New York 10016.)

(Technical society and technical association specifications and standards are generally available for reference from libraries and are also distributed among technical groups and using Federal agencies.)

* 2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Materials

3.1.1 Basic fabric. The basic fabric shall conform to MIL-C-83453 and shall be USAF color shade No. 1157 (see 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:15Z
Check the source to verify that this is the current version before use.

* 3.1.2 Quilted lining. The quilted lining shall conform to type IV, style a, class 3 of MIL-B-41826 except that one of the outer coverings and the quilting thread shall be USAF color shade No. 1157 (see 6.3).

3.1.3 Thread. The thread shall conform to type I, class 1, letter size B, 3 ply of V-T-285. The color of the thread shall be DOD Thread Shade Black AA Cable No. 66043 (see DOD Standard Color Card of Official Standardized Shades for Sewing Threads 1968).

3.1.4 Knitted synthetic mouton. The knitted synthetic mouton shall conform to type II of MIL-C-6590 except that the color shall be USAF color shade No. 1157 (see 6.3).

3.1.5 Satin cloth. The satin cloth for the sweatband shall conform to class 1 of MIL-C-368 or the basic fabric (see 3.1.1), and shall be USAF color shade No. 1157 (see 6.3).

3.1.6. Crinoline. The lining for the sweatband shall be undyed crinoline, shall weigh approximately 2 ounces per square yard, and shall have not less than 25 threads per inch in the warp and the filling.

3.1.7 Grommet. The grommet shall conform to type I, class 3, size No. 0 of MIL-G-16491.

3.1.8 Stiffener. The stiffener for the visor shall conform to MIL-C-41831.

* 3.1.9 Snap fasteners. The snap fasteners shall conform to style 2, finish 2 of MIL-F-10884 and shall consist of the following components: MS27980-7B (stud), MS27980 (eyelet), MS27980-1B (button), and MS27980-6B (socket).

3.2 Design. The cap shall consist of a six-panel crown with a six-panel quilted lining; a lined sweatband; a chin strap that is closed by a snap fastener; a visor that can be worn up or down and that is maintained in the up position by a snap fastener; and a neck and ear flap that can be worn up or down. The outerside of the visor and of the neck and ear flap, in their turned up position, shall be covered with knitted synthetic mouton.

3.3 Construction. The cap shall be constructed as specified in table I; however, the manufacturer will not be required to follow the exact sequence of operations as listed therein.

3.3.1 Stitches, seams, and stitchings. Stitch, seam, and stitching types specified in table I shall conform to FED-STD-751. The stitches per inch specified in table I shall be interpreted to be the minimum and the maximum stitches per inch permitted.

3.3.1.1 Thread breaks and ends of seams and stitchings. The ends of all seams and stitchings, except the ends caught in other seams and stitchings or the ends of a continuous line of stitching, shall be backstitched not less than 1/4 inch. The ends of a continuous line of stitching shall overlap not less than 1/2 inch. Thread breaks shall be secured by stitching back of each end of the break not less than 1/2 inch.

3.3.2 Cutting. The parts of the cap shall be cut from the materials specified herein in accordance with the pattern parts specified in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:15Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations.

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
1	Cut parts (a) Cut all parts of the cap in strict accordance with the patterns, which show size, directional lines for cutting, markings, notches, and shape for the proper assembly of the parts. (b) Cut all parts of the cap made from the basic fabric from the same piece of the basic fabric except chin strap, which may be stripped or cut from ends. Note: Cut the stripping for the strap of sufficient width to comply with pattern part. The stripping may be placed on rolls, however there shall be no visible piecing on the finished strap. The stripping shall approximately match the shade of the cap. (c) Cut all parts of the cap made from the quilted lining from the same piece of quilted lining. Cut the quilted lining so that the exposed side of the quilted lining in the finished cap will be blue. (d) Cut all parts of the cap made from the knitted synthetic mouton from the same piece of the knitted synthetic mouton. (e) Replace at the time of cutting any part that contains any defects such as holes, smashes, slubs, or multiple floats.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:15Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
2	Replace damaged parts (a) Replace any part damaged by a needle chew that might develop into a hole, a cut, a tear, a hole, a mend, or a burn during the manufacturing process.			
3	Shade mark, ticket, or bundle parts (a) Shade mark, ticket, or bundle all parts of the cap to insure a uniform shade and size throughout the cap. The marking may be any method except corrosive metal fastening devices, sew-on tickets, or adhesive tickets that will discolor the cloth or leave adhesive on the cloth after the tickets have been removed from the cloth. (b) If the bundle system is used, separate the plies from each bolt of fabric (in the spreading) by tissue paper or another identifying media. Segregrate the cut parts that have been cut from the same piece of cloth into bundles. Identify the bundles so that the parts of each cap will be from the same piece of cloth.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:15Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
4	Make crown outer shell			
	(a) Join a front panel of the crown outer shell and a back panel of the crown outer shell to each side panel of the crown outer shell, matching the notches, with a 1/4-inch seam.	301	SSa-1	8-10
	(b) Turn and top stitch 1/16 inch on both sides of the each joining seam.	301	SSa-2	8-10
	(c) Stitch the front panels of the crown outer shell and the back panels of the crown outer shell, matching the notches, with a 1/4-inch seam.	301	SSa-1	8-10
	(d) Turn and top stitch 1/16 inch on both sides of each joining seam.	301	SSa-2	8-10
*	(e) Install the button and the socket assembly of the snap fastener with a reinforcement, in accordance with the pattern marks, in the crown outer shell.			
*	Note: The reinforcement for the button and the socket assembly of the snap fastener shall be a 1-inch-square piece of the basic fabric.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:15Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
5	Make chin strap			
*	(a) Fold the chin strap lengthwise with the face side of the cloth on the inside, and stitch 1/4 inch from the edges, leaving one end open for turning.	301	SSe-2(a)	8-10
*	(b) Turn the chin strap right side out. Stitch the sides and the end of the chin strap 1/16 inch from the edge, or - chin strap may be stripped (see oper. 1b) and made up with two strips with a folder and stitched 1/16 inch from each folded edge with a double needle 1/2 inch gage.	301 301	SSe-2(b) or OSf-1 EFN-2	8-10 8-10
*	(c) Install the stud of the snap fastener, through all plies of the materials, at the closed end of the chin strap in the location that is indicated by the pattern.			
*	Note: The stud of the snap fastener shall be positioned so that, when the chin strap is in the overhead position, the stud of the snap fastener will engage with the corresponding sockets of the snap fastener in the neck and ear flap.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:15Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
6	Make neck and ear flap			
*	(a) Install the sockets of three snap fasteners on the neck and ear panel, through the neck and ear panel (basic fabric) and a reinforcement that is made of the basic fabric, in the location that is indicated by the pattern.			
*	(b) Join the neck and ear panel (basic fabric) and the neck and ear panel (knitted synthetic mouton), with a 1/4-inch seam, along the sides and the top curved portion, catching the chin strap in the location that is indicated by the pattern marks.	301	SSa-1	8-10
*	(c) Superimpose a 1/2-inch-long bartack on the neck and ear panel joining seam and the chin strap.	Bartack		
7	Make visor			
*	(a) Install the stud of the snap fastener, through the outer shell (basic fabric) of the visor an a reinforcement that is made of the basic fabric, in the location that is indicated by the patterns.			
*	(b) Join the top visor (knitted synthetic mouton) and the visor (basic fabric) along the outer arc edge with a 1/4-inch seam.	301	SSa-1	8-10

Source: https://assist.dla.mil -- Downloaded: 2026-04-23T08:15Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
*	(c) Turn the visor right side out. Insert the inner visor (stiffener) snugly against the visor-top visor joining seam, with the two plies of the seam outlet between the basic fabric and the stiffener.			
8	Make crown lining			
	(a) Stitch a front panel lining and a back lining and each side panel lining, matching the notches, with a 1/4-inch seam.	301	SSa-1	8-10
	(b) Join the front panel linings to the back panel linings, matching the notches, for a distance of 2 inches with a 1/4-inch seam, leaving the top of the crown lining open for turning.	301	SSa-1	8-10
9	Attach visor and neck and ear flap to crown outer shell			
*	(a) Position the visor and the neck and ear flap on the crown outer shell, in accordance with the notches. Join the visor and the neck and ear flap to the crown outer shell with a single row of stitching 1/4-inch gage, without any puckering between the visor and the crown outer shell or between the neck and ear flap and the crown outer shell.	101 or 301	SSa-1	8-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:15Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
10	Install grommet			
*	(a) Install a grommet with a reinforcement in the visor, in accordance with the pattern marks, through the basic fabric, the stiffener, and the knitted synthetic mouton.			
*	Note: The reinforcement for the grommet shall be a 1-inch-square piece of the basic fabric.			
11	Make sweatband			
	(a) Join the ends of the sweatband with a 1/4-inch seam, catching the crinoline lining.	301	SSa-1	8-10
	Note: Quilting and insulation of the sweatband are not required.			
12	Attach sweatband to crown lining			
	(a) Join the sweatband to the crown lining, matching the front and back notches, with a 1/4-in seam.	301	SSa-1	8-10
	(b) Turn the sweatband down to the finished position. Raise stitch the sweatband on the crown lining 1/16 inch from the edge.	301	SSa-2	8-10

Source: https://assist.dla.mil -- Downloaded: 2020-10-23T08:15Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
13	Attach label			
	(a) Place the combination identification and size label, on the crown lining, above the sweatband center back seam; stitch the label on all four sides 1/16 inch from the edge.	301	SSa-1	8-10
14	Attach sweatband to outer shall			
	(a) Position the folded edge of the sweatband to 1/2 inch in from the edge. Join the sweatband to the bottom of the outer shell, with a single row of stitching 1/16-inch to 3/32-inch gage, without stretching or twisting the sweatband.	301	LSa-1	8-10
15	Close opening in crown lining			
*	(a) Turn the cap to the finished position. Close the opening in the crown lining by hand stitching with a 5/16-inch seam.	Hand		8-10
16	Clean cap and close snap fasteners			
	(a) Trim all thread ends. Remove all loose thread ends.			
	(b) Remove all spots.			
	(c) Close the snap fasteners.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:15Z
Check the source to verify that this is the current version before use.

TABLE II. Pattern parts.

Materials	Pattern Parts	Cut Parts
Basic fabric (see 3.1.1)	Back panel	2
	Side panel	2
	Front panel	2
	Chin strap 1/	1
	Visor	1
	Neck and ear panel	1
Quilted lining (see 3.1.2)	Back panel	2
	Front panel	2
	Side panel	2
Knitted synthetic mouton (see 3.1.4)	Neck and ear panel	1
	Top visor	1
Satin cloth (see 3.1.5)	Sweatband	1
Crinoline (see 3.1.6)	Sweatband lining	1
Stiffener (see 3.1.8)	Inner visor	1

1/ Strap may be stripped.

3.4 Patterns. Standard patterns for the pattern parts listed in table II will be furnished by the Government (see 6.2). The standard patterns provide a seam allowance of 1/4 inch except as otherwise specified herein for the seam joining the sweatband to the bottom of the crown outer shell and the seam joining the inner edge (arc) of the visor. The standard patterns are to be used as a guide in cutting the manufacturer's working patterns. The manufacturer's working patterns shall be identical in shape and size to the standard patterns. The standard patterns and the manufacturer's working patterns shall not be altered in any way.

* 3.5 Identification of product. The cap shall have a combination identification and size label. The combination identification and size label shall conform to type I, class 4 of DDD-L-20 except that the words "Dry Clean Only" shall be included in the marking. The combination identification and size label shall have colorfastness to dry cleaning.

3.6 Finished measurements. The finished measurements shall conform to table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:15Z
Check the source to verify that this is the current version before use.

TABLE III. Finished measurements.

Sizes of Cap	Circumferences (Inches) 1/
Extra small	23-1/4
Small	24
Medium	24-3/4
Large	25-1/2
Extra large	26-1/4

1/ The tolerance shall be plus or minus 1/4 inch. The finished measurement of the cap shall be taken on the inside at the bottom edge of the sweatband.

3.7 Workmanship. The cap shall be manufactured in a thoroughly workmanlike manner.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection

4.2.1 Materials and components. Materials and components shall be tested in accordance with all of the applicable subsidiary documents referenced herein to the extent applicable. The crinoline shall be subjected to the tests listed in table IV. All of the requirements listed in table IV shall be applicable to the sample unit. The lot size of the crinoline shall be expressed in yards. The sample unit for the crinoline shall be 1/4 yard full width. The sample size for the crinoline shall be in accordance with table V. Failure of one or more sample units of the crinoline to meet any specified requirement shall be cause for rejection of the lot represented.

* TABLE IV. Testing of crinoline.

Characteristics of Crinoline (see 3.1.6)	Test Methods of FED-STD-191
Material identification	1200 1/
Weight	5041 1/
Threads per inch	5050 1/

1/ A certificate of compliance will be acceptable for this requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:15Z
Check the source to verify that this is the current version before use.

TABLE V. Sample size.

Lot Sizes	Sample Sizes
800 or less	2
801 to 22,000	3
22,001 or more	5

4.2.1.1 Certificates of compliance. If a certificate of compliance is furnished for any requirement specified herein, the Government shall have the right to check test items to determine the validity of the certification.

4.2.2 End item. The end item shall be examined as specified in 4.2.2.1 and 4.2.2.2. The sample unit for these examinations shall be one cap.

4.2.2.1 Visual examination. The end item shall be visually examined for the defects listed in table VI. The inspection level for this visual examination shall be II of MIL-STD-105. The acceptable quality level for this visual examination shall be 2.5 defects per 100 units (dhu) for major defects, 6.5 dhu for major and minor A defects, and 10.0 dhu for major and minor A and B defects.

4.2.2.2 Examination of finished measurement. The end item shall be examined to determine conformance to the finished measurement specified herein. The inspection level for the examination of the finished measurement shall be S-3 of MIL-STD-105. The acceptable quality level for the examination of the finished measurement shall be 4.0 dhu (one class).

4.2.3 Examination of preparation for delivery. Shipping containers that are prepared for delivery shall be examined, for the defects listed in table VII, for compliance with the preparation for delivery specified herein. The sample unit for the examination of preparation for delivery shall be one shipping container fully prepared for delivery except that it need not be sealed. The inspection level for the examination of preparation for delivery shall be S-3 of MIL-STD-105. The acceptable quality level for the examination of preparation for delivery shall be 4.0 dhu (one class).

5. PACKAGING

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each cap shall be inserted in a snug-fitting bag that is fabricated from 0.0015-inch-thick polyethylene. All seams and closure of the bag shall be heat sealed. The excess air within the bag shall be expelled during the heat-sealing operation to the extent necessary to insure that the required multiples of packaged units will fit into the shipping container.

5.1.2 Level C. The caps shall be packaged to afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity. The supplier's standard practice, if it meets this requirement, may be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:15Z
Check the source to verify that this is the current version before use.

TABLE VI. Classification of defects.

Defect	Major	Minor A	Minor B
Cleanness			
Spot or stain of permanent nature		X	
Removable spot or stain, clearly noticeable		X	
Ends of thread not trimmed or loose threads or one or more shade tickets not removed			X
Shade stamp marking exposed on outside of cap		X	
Components and assembly			
Any defective component	X		
Any component omitted	X		
Any required operation omitted or improperly performed	X		
Cutting			
Any part not cut in accordance with directional lines indicated on patterns or specified requirements	X		
Material defects and workmanship damages			
Any weakening defects such as smash, multiple float, or slub	X		
Shade bars, slubs, or dye or finishing streaks		X	
Needle chew, hole, cut, tear, mend, or burn		X	
Ruptured fibers in line of sewing (usually caused by broken, blunt, or hooked needle), affecting appearance or serviceability		X	
Seams and stitchings			
Seam twisted, puckered, or pleated		X	
Part of cap caught in any unrelated operation or stitching	X		
Thread(s) used on outside of cap not same shade or not satisfactorily matching shade of cap		X	
Thread break or end(s) of seam or stitching or ends of continuous line of stitching not secured as specified herein .		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:15Z
Check the source to verify that this is the current version before use.

TABLE VI. Classification of defects. - Continued

	Defect	Major	Minor A	Minor B
	Gage of edge, top, or raise stitching irregular, i.e., unevenly gaged or corresponding stitchings not uniformly gaged, affecting appearance		X	
	Gage of edge, top, or raise stitching not within range of gage specified or varying more than 1/16 inch when range is not specified			X
*	Gage of hand-fell joining seam exceeding specified gage more than 1/16 inch but not more than 1/8 inch			X
*	Gage of hand-fell joining seam exceeding specified gage more than 1/8 inch but not more than 3/16		X	
*	Gage of hand-fell joining exceeding specified gage more than 3/16 inch	X		
*	Gage of machine-sewn seam exceeding specified gage more than 1/16 inch	X		
*	Gage of machine-sewn seam exceeding specified gage up to 1/16 inch		X	
	Open seam over 1/8 inch but not over 1/4 inch on joining seam			X
	Open seam over 1/4 inch but not over 1/2 inch on joining seam		X	
	Open seam over 1/2 inch on joining seam	X		
	Open seam over 1/4 inch but not over 1/2 inch on hem			X
	Open seam over 1/2 inch on hem		X	
	Stitches skipped or broken over 1/4 inch but not over 1/2 inch on edge, top, or raise stitching when seam is seamed, turned, and stitched			X
	Stitches skipped or broken over 1/2 inch on edge, top, or raise stitching when seam is seamed, turned, and stitched		X	
	Run-offs on joining seam, resulting in open seam 1/			
*	Run-offs over 1/2 inch but not over 1 inch on edge, top, or raise stitching if not resulting in open seam (outside of cap only) 1/			X
*	Run-offs over 1 inch on edge, top, or raise stitching if not resulting in open seam (outside of cap only) 1/		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:15Z
Check the source to verify that this is the current version before use.

TABLE VI. Classification of defects. - Continued

Defect	Major	Minor A	Minor B
Raw edge over 1/8 inch but not over 1/4 inch on outside of cap 2/			X
Raw edge over 1/4 inch on outside of cap 2/		X	
Raw edge over 1/2 inch but not over 2 inches on inside of cap 2/			X
Raw edge over 2 inches on inside of cap 2/		X	
Seam or stitch type not specified type		X	
Loose stitch tension, resulting in loose seam	X		
* Loose stitch tension on edge, top, or raise stitching, that is, loose exposed loops of top or lower thread		X	
Tight tension 3/	X		
One stitch per inch less than stitches per inch specified on major portion of seam or stitching			X
Two stitches per inch less than stitches per inch specified on major portion of seam or stitching		X	
Three or more stitches per inch less than stitches per inch specified on major portion of seam or stitching	X		
One or more stitches per inch more than stitches per inch specified on major portion of seam or stitching			X
Shaded parts			
Outside parts (visible when cap is worn) shaded		X	
Quilted lining and inside parts (not visible when cap is worn) badly shaded			X
Snap fasteners for visor and chin strap			
One or more sockets omitted, defective, or improperly clinched	X		
One or more studs omitted, defective, or improperly clinched	X		
One or more sockets out of alignment with stud		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:15Z
Check the source to verify that this is the current version before use.

TABLE VI. Classification of defects. - Continued

Defect	Major	Minor A	Minor B
Grommet			
Grommet omitted, defective, or improperly clinched	X		
Grommet off center more than 1/8 inch but not more 1/4 inch		X	
Grommet off center more than 1/4 inch	X		
Combination identification and size label			
Size on combination identification and size label missing, incorrect, or illegible	X		
Information (except size) on combination identification and size label incomplete, incorrect, or illegible			X
Combination identification and size label misplaced so that it is off center of back quilted lining more than 1/2 inch		X	
Stitching on one or more edges of combination identification and size label omitted			X

1/ A break in a line of stitching, continuous skipped or run-off stitches (except on edge, top, or raise stitching), or run-off on a joining seam shall be classified as an open seam.
2/ A raw edge shall be classified as a raw edge if it occurs along an edge that is required to be turned under but the edge is securely caught in the stitching. If the edge is not securely caught in the stitching, the raw edge shall be classified as an open seam.
3/ Puckering is evidence of tight tension. If puckering is evident, the seam shall be tested by exerting normal pull in the lengthwise direction of seam or stitching.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:15Z
Check the source to verify that this is the current version before use.

TABLE VII. Examination of preparation for delivery.

Examine	Defects
Marking (exterior and interior)	Marking omitted; incorrect; illegible; or improper size, location, sequence, or method of application
Materials	Any component missing
	Any component damaged, affecting serviceability
	Any component not as specified
Workmanship	Inadequate applicable of components such as incomplete closure of case liner or container flaps, loose strapping, or inadequate stapling
	Bulging or distortion of container
Content	Number of caps per container more or less than required
	Size shown on one or more caps not as specified on outer container

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Forty caps of one size only, packaged as specified, shall be packed in a box that is assembled, closed, and reinforced to conform to class weather-resistant, grade V2s, size 3A of MIL-B-17757. The fiberboard that is used to fabricate the liner shall conform to type CF, class weather-resistant, variety DW, grade V15c of PPP-F-320. Level A packages shall be packed flat two in length, ten in width, and two in depth within the shipping container. The top and the bottom of the contents of shipping container shall be completely covered with a sheet of paper. The paper shall be a minimum of 30-pound basis weight and shall conform to grade B of UU-P-268. Towards the end of the contract or if the quantity of caps of the same size is less than the quantity of caps required per shipping container, mixed sizes (see 5.3.1) may be packed within the same shipping container.

5.2.2 Level B. Forty caps of one size only, packaged as specified, shall be packed in a shipping container that is assembled and closed to conform to class domestic, grade 275, size 3A of MIL-B-17757. The fiberboard that is used to fabricate the liner shall conform to type CF or SF, class domestic, variety DW, grade 275 of PPP-F-320. Level A packages shall be packed flat two in length, ten in width, and two in depth within the shipping container. The top and the bottom of the contents of the shipping container shall be completely covered with a sheet of paper. The paper shall be a minimum of 30-pound basis weight and shall conform to grade B of UU-P-268. Towards the end of the contract or if the quantity of caps of the same size is less than the quantity of caps required per shipping container, mixed sizes (see 5.3.1) may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:15Z
Check the source to verify that this is the current version before use.

5.2.2.1 Fiberboard board. When specified (see 6.2), the shipping container for level B packing shall be fabricated in accordance with grade V3c or V3s of MIL-B-17757 and closed in accordance with the appendix of the container specification.

5.2.3 Level C. Caps that have been packaged as specified shall be packed in a manner to insure acceptance by the carrier and safe delivery at destination at the lowest transportation rate for such supplies. Shipping containers shall be in accordance with the rules or regulations applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Mixed sizes. Each shipping container that is packed with mixed sizes shall have a white paper label attached to the end and side directly under the printing or stenciling. The label shall be 5 inches by 4 inches and shall have the words mixed sizes legibly stamped or printed thereon. The quantity of each size of caps in the shipping container shall be legibly printed under these words.

* 5.3.2 Polyethylene bags. A white paper label inserted in each bag so that it is readable through the polyethylene or the outside of each bag shall be legibly printed or stamped in black with the stock number, the specification number, the nomenclature, the quantity, and the size of the caps in the bag.

6. NOTES

6.1 Intended use. The cap covered by this specification is intended to be worn, in moderate to cold temperature, by male and female security police of the Department of the Air Force.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification

(b) Size required (see 1.2)

(c) Government furnished standard patterns (see 3.4)

(d) Selection of applicable levels of packaging and packing (see 5.1, 5.2, and 5.2.2.1).

6.3 Color shades. Samples of color shades can be obtained from the procuring activity or as directed by the contracting officer.

6.4 Figures. Figure 1 and 2 show general style of the cap and are furnished for information only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:15Z
Check the source to verify that this is the current version before use.

6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Air Force - 11

Reviewer:
Air Force - 99

Preparing activity:
Air Force - 11

Project No. 8415-F253

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:15Z
Check the source to verify that this is the current version before use.

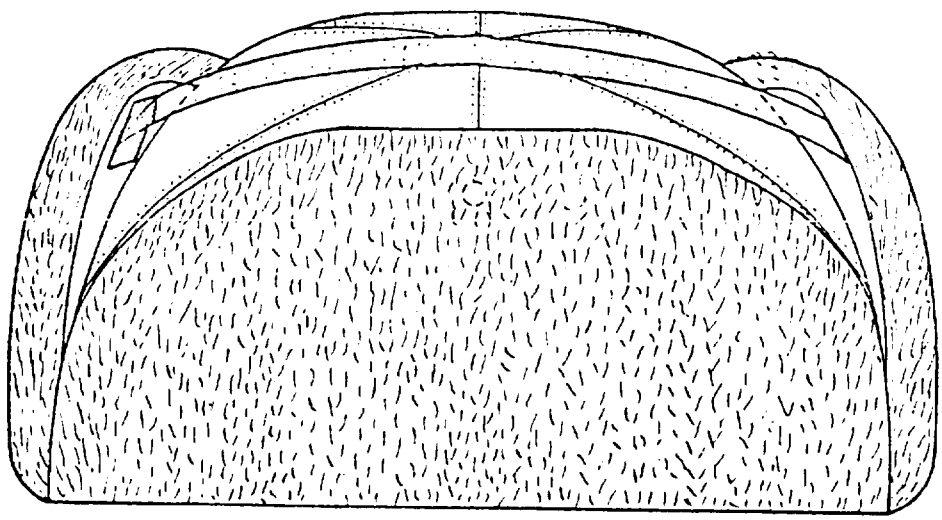


FIGURE 1. Cap (front view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:15Z
Check the source to verify that this is the current version before use.

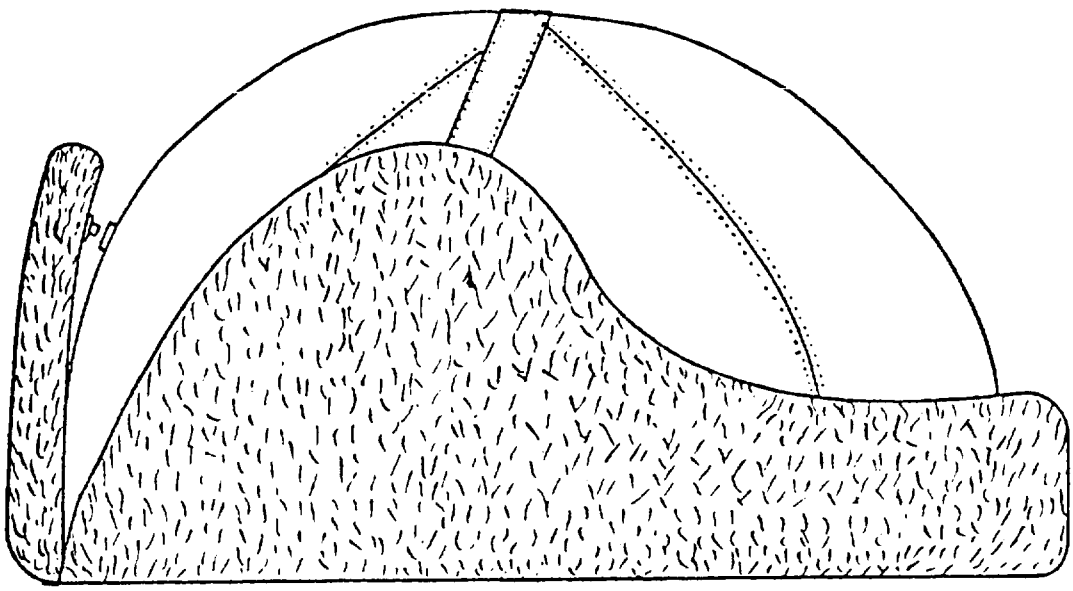


FIGURE 2. Cap (side view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:15Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:15Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE AIR FORCE

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 73236 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

ASD/ENESS
Wright-Patterson AFB, O 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:15Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-83473A (USAF)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 PREVIOUS EDITION WILL BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:15Z
Check the source to verify that this is the current version before use.