INCH POUND

MIL-H-82244F
23 March 1993
SUPERSEDING
MIL-H-82244E
19 June 1989

MILITARY SPECIFICATION

HOOD, RADIOACTIVE CONTAMINANTS, PROTECTIVE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for type of radioactive contaminant protective hood made of polyester and cotton twill cloth.

2. APPLICABLE DOCUMENTS

2.1 Government Documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8415

DISTRIBUTION STATEMENT A.

Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

A-A-52094	- Thread, Cotton
NN-P-71	- Pallet, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way (Partial)
DDD-L-20	- Labels; For Clothing, Equipage and Tentage (General Use)

MILITARY

MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-21851	- Cloth, Twill, Polyester and Cotton
MIL-F-21840	- Fastener Tapes, Hook and Loop Synthetic

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seam and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-2073-1	- Department of Defense Materials Procedures Development and Application of Packaging Requirements
MIL-STD-2073-2	- Packaging Requirement Codes

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2 1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

U.S. Postal Manual

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001.)

2.2 Non-Government Publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. When specified, (see 6.2), a sample shall be subjected to first article inspection, in accordance with 4.3.

3.2 Material.

3.2.1 Basic Material. The basic material shall be a polyester and cotton twill cloth, color shade yellow 3511 conforming to MIL-C-21851, standard sample piece number 84058.

3.2.2 Thread, cotton. The cotton thread used for the hood shall be ticket numbers 30 and 50, 3 ply type 1A3 of A-A-52094. The color of the thread shall approximate the base fabric.

3.2.3 Fastener tapes. The hook and loop fastener tapes shall be in accordance with type II Class 1 of MIL-F-21840. The hook tape for the neck closure and for the rear anchor point shall be 2 inches wide; the loop tape for the neck closure shall be 1 inch wide. The color of the fasteners shall be white 3054.

3.2.4 Identification and instruction label. Each hood shall have a combination identification and instruction label conforming to type VI, class 15 of DDD-L-20. The printing shall show fastness to laundering and shall bear the following inscription:

HOOD, RADIOACTIVE CONTAMINANTS, PROTECTIVE
FIBER CONTENT: 65% Polyester and 35% Cotton
CONTRACT NO: DLA-100-00-0-000 (Example)
STOCK NO: 8415-00-000-0000 (Example)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER (if other than contractor):

LAUNDER IN ACCORDANCE WITH PRESCRIBED REQUIREMENTS.

3.2.5 Radiation symbol. The marking for the radiation symbol shall be in accordance with type IV of DDD-L-20. The radiation symbol shall be 3-3/4 inches in diameter conforming to the design and dimensions as shown in Figure 2 and shall be black.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

3.3 Design. The hood (see Figure 1) shall consist of a four section headpiece with a semi-circular cape. The cape shall have an adjustable nylon fastener tape front closure. A nylon hook fastener to be used for anchoring the hood to the coveralls shall be affixed to the underside center back of the cape The hood shall have a black radiation symbol stamped on the lower left front of cape. It is encouraged that recycled materials be used when practical as long as the materials meet the requirements of this specification.

3.3.1 Figures. The Figures 1 and 2 are furnished for information purposes only. When inconsistencies exist between the written specification and the figures, the written specification shall govern.

3.4 Patterns. Standard patterns to be used to cut working patterns will be furnished buy the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are permitted on the working patterns. The patterns allow 1/2 inch seam allowance for all seams, except as otherwise indicated in table I.

3.4.1 Pattern parts The component parts shall be cut from material as specified and in accordance with the following list of parts:

Material	Pattern nomenclature	Cut parts
Cloth, polyester and cotton (basic material)	Right front quarter panel	1
	Left front quarter panel	1
	Back quarter panel	2
	Front quarter lining	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

3.4.1.1. Shade marking. The component parts of the hoods shall be marked to insure a uniform shade throughout the garment. Any method may be used except:

(1) Metal fastening devices.

(2) Sew-on shade tickets.

(3) adhesive type tickets which discolor or adhere to the material upon removal of tickets.

NOTE: The use of ink pad numbering machine, rubber stamp or pencil is allowed, provided the numbering does not show on the outside of the garment and whenever possible, is covered by the seam allowance.

3.5 Construction.

3.5.1 Stitches, seams, and stitchings. Stitch, seam and stitching types as specified in Table I shall conform to the requirements of FED-STD-751. Whenever two or more methods for seams or stitching are given for the same operation, any one of them may be used. Where stitch type 401 is used, the looper (underthread) shall be on inside of hood. Ends of all seams produced by stitch type 401, shall be caught in other seams or stitchings. Unless otherwise specified, all double-needle stitching shall be 1/4 inch gauge with row of stitching next to folded edge not more than 1/16 to 1/8 inch from the finished edge. Seam allowance shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats or open seams will result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Edgestitching and topstitching shall be 1/16 inch from folded edge. Hook and loop fastener tape stitching shall be 1/16 to 1/8 inch from the edge of the tape. When 2 inch wide hook fastener tape is used, add an extra row of stitching down the middle of the fastener tape.

3.5.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

3.5.3 Thread breaks and end of seams. End of all seams and stitchings when not caught in other seams or stitchings shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching (except label) shall be overlapped not less than 1/2 inch. The ends of the label stitching shall be overlapped not less than 3 stitches. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. Skipped stitches or 401 stitch type thread breaks may be repaired by using 301 stitch type.

3.6 Manufacturing operations requirements. The hoods shall be manufactured in accordance with operation requirements specified in Table I. The contractor is not required to follow the exact sequence of operations provided the finished hoods is identical to that produced by following the sequence as listed in Table I. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability or appearance requirements cited in the specification.

NOTE: Abbreviations used in Table I are as follows:

Stch	-	Stitch
In	-	Inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
Smlr	-	Similar
Btn	-	Button
Btnhl	-	Buttonhole
Incl	-	Including
Dbl	-	Double
chnstch	-	chainstitch

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF HOOD

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
1.	Cutting a. The hood shall be cut in strict accordance with the patterns furnished, which shall show shape and directional warp lines for cutting and notches for proper assembly of all parts. Direction lines shall be placed in the warp direction of the material. b. All component parts shall be cut from one piece of material. The filling flush side shall be the face and shall finish as the exposed surface of the hood, except for the lining which shall have the twill side exposed.				
2.	Replacement of defective components During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in section 4 shall be removed from production and replaced with non-defective and properly matched components.				
3.	Shade marking (see 3.7.1) Mark, ticket or bundle all component parts to insure a uniform shade and proper assembly throughout the hoods.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF HOOD - Continued

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
4.	Assembly a. Stitch the front quarter linings together from top of face opening to the top of hood.	301 or 401	LSc-2	10 - 12	30 30	30 50
	b. Stitch front quarter panels together from top of face opening to top of hood, with the edges lapped towards either the right or the left.	301 or 401	LSc-2	10 - 12	30 30	30 50
	c. Fold face to face the edge of the right front quarter panel 2-1/4 inches to form a closure facing. Turn back the raw edge of facing 1/4 inch. Stay stitch the top edge of the facing to hold facing in position.					
	d. Fold face to face the edge of the left front quarter panel 1-1/4 inches to form a closure facing. Turn back the raw edge of facing 1/4 inch. Stay stitch the top edge of facing to hold facing in position.					
	e. Superimpose the linings, twill side down, to the face side of the front quarter panels with front ends of lining overlapping turned back edge of front facings. Stitch 1/4 inch from the raw edge around the face opening catching the top portion of facing. Turn lining to inside of hood.	301	SSa-1	10 - 12	30	30

Source: https://assist.dla.mil -- Downloaded: 202640-23T06:56Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF HOOD - Continued

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	f. Turn under both bottom lining raw edges 1/4 inch and stitch to the front quarter panels 1/16 inch from the folded edge.	301	LSd-1	10 - 12	30	30
	g. Stitch along both lining back edges to front quarter panels 1/4 inch from the raw edges. NOTE: Operations 4f and 4g may be done as one continuous.	301	SSa-1	10 - 12	30	30
	h. Turn each closure facing to inside of hood and stitch each of the pre - folded edges of the closure facings to the front quarter panels.	301	EFb-1	10 - 12	30	30
	i Stitch the back quarter panels together with the edges lapped towards either the right or left.	301 or 401	LSc-2	10 - 12	30 30	30 50
	j. Stitch the front quarter panels to the back quarter panels with the front over the back.	301 or 401	LSc-2	10 - 12	30 30	30 50
	k. Fold hem under and raw edge under 3/16 inch and topstitch simultaneously catching bottom of label in hem stitching	301	EFb-1	10 - 12	30	30

Source: https://assist.dla.mil -- Downloaded: 202640-23T06:56Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF HOOD - Continued

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	l. Stitch the remaining three sides of label to hood 1/16 inch from edge. The ends of the label stitching shall be overlapped not less than 3 stitches. OR	301	LSbj-1	10 - 12	30	30
	Box Tacker may be used to secure label around all 4 sides.	301	Box Tacker	8-12	30	30
	m. Hem shall finish 1/4 (± 1/8) inch wide and the label shall be centered over the center back seam.					
	n. Position and center a 3 inch cut length of 2 inch wide hook fastener tape vertically over the inside rear seam 2-1/4 (± 1/4) inch above the bottom edge of hem, with the long dimension parallel to the seam. Stitch 1/16 to 1/8 inch from edge around all four sides and through the lengthwise center of the tape.	301	LSbj-1	10 - 12	30	30
	o. Cut an 8 inch length of 2 inch hook fastener tape. Position 1/16 inch from folded edge on outside of right front faced closure. Stitch 1/16 to 1/8 inch from edge around all four sides and through the lengthwise center of the tape.	301	LSbj-1	10 - 12	30	30

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF HOOD - Continued

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	p. Cut an 8 inch length of 1 inch loop fastener tape. Position 1/16 inch from folded edge on facing on inside of left front closure. Stitch 1/16 to 1/8 inch from edge around all four sides.	301	LSbj-1	10 - 12	30	30
5.	Radiation symbol The radiation symbol (see Figure 2) shall be stamped on the outside of the lower left front of the cape, 1-1/2 (± 1/4) inch from the hemmed edges as indicated in Figure 2.					
6.	Cleanness a. All thread ends shall be trimmed to not over 1/4 inch in length. b All loose threads shall be removed NOTE: Care shall be taken when trimming thread ends that damage to the fabric does not result c. All spots and stains shall be removed.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

3.7 Sizes and measurements. The finished hood shall conform to the measurements shown in Table II (see Figure 1). All measurements are expressed in inches.

Table II - Measurements of Hood

		Measurement	Tolerance
1/	Width of cape	26	± 1/2
2/	Length of cape	8-3/4	± 1/4
3/	Length of face opening	7	± 1/4
4/	Width of hood	9-1/2	± 1/4

1/ Width of cape. With the hood laid flat as shown in view B of Figure 1 and the front closure abutted, measure from the intersection of side seam and the hem to the same point on the opposite side.

2/ Length of cape. With the hood laid flat as shown in view B of Figure 1, and the front closure abutted, measure from bottom edge of face opening to the bottom of hood at distance of one inch from the front opening.

3/ Length of face opening. With hood laid flat as shown in view A of Figure 1, and the front edges of the facing opening and front closure superimposed and even, measure from top of face opening to a level in line with the bottom of face opening.

4/ Width of hood. With the hood laid flat as shown in view A of Figure 1, and the front edges of the facing opening and closure superimposed and even, measure from a point midway of face opening across the head to the back seam.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility For Inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. The first article, submitted in accordance with 3.2, shall be inspected for compliance with design, construction, workmanship and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents.

4.4.2 Examination of the end item. Examination of the end item shall be in accordance with 4.4.2.1 and 4.4.2.2. The applicable inspection levels and acceptable quality levels (AQL'S) shall be as indicated in 4.4.2.3. The sample shall be one finished hood. The lot size shall be expressed in units of hoods.

4.4.2.1 Visual examination. The hoods shall be examined for defects in color, design, material, construction, workmanship and marking and the defects classified in accordance with the following list:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

Table III - Classification of Defects.

Defect	Major	Minor
I. MATERIAL DEFECTS AND WORKMANSHIP DAMAGES		
a. Any weakening material defect, such as a smash, hole, cut, tear, burn, loose slub, mend, thin place, needle chew or drill hole	X	
b. One or more broken or missing yarns	X	
c. Any nonweakening material defect such as knot, misweave, unsightly slub, loose yarn, coarse yarn, area of no dye penetration, dye streak or woven in waste		X
II. CLEANNESS		
a. Any spot or stain on outside		X
b. Thread ends not trimmed to 1/4 inch or less or loose threads not removed (to be scored only when condition exists on major portion of hood)		X
c. Two or more shade or size tickets not removed		X
d. Shade marking exposed and visible on outside of hood		X
III. SHADED PARTS		
a. Shade of hood other than specified	X	
b. Any outside part shaded		X
c. Shade of thread marked in contrast with shade of hood		X
IV. CUTTING		
Any part not cut in accordance with directional warp lines indicated on or in accordance with specification requirements	X	
V. COMPONENT AND ASSEMBLY		
a. Any component part omitted or required operation omitted (unless otherwise classified herein)	X	
b. Any component not as specified (type, size, color, etc)	X	
c. Any operation not as specified (unless otherwise classified herein)		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

Classification of Defects.

Defect	Major	Minor
VI. SEAMS AND STITCHING		
a. Accuracy of seaming		
1. Part of hood caught in any unrelated stitching operation	X	
2. Seam puckered, twisted, or pleated (unless otherwise classified herein)		X
3. End of any seam stitching when not caught in other seam or stitching backtacked less than 3/8 inch		X
4. End of a continuous line of stitching overlapped less than 1/2 inch		X
5. Thread breaks not secured or stitched back of the break less than 1/2 inch		X
b. Gauge of stitching		
1. Irregular, i.e., unevenly gauged, not uniform on major portion of seam		X
2. Beyond range of width specified or varies more than 1/16 inch when no range is specified		X
3. Edge or topstitching sewn too close to edge, resulting in damage to cloth		X
c. Open seams 1/		
1. 1/4 inch or less		X
2. more than 1/4 inch	X	
d. Runoff, skipped or broken stitches		
1. On joining seam: Classify and score as open seam 1/		
2. Edge or topstitching		X
e. Raw edges		
1. On outside		
-more than 1/8 inch but less than 1/2		X
-more than 1/2 inch	X	
2. On inside		
-more than 1/2 inch but less than 2 inches		X
-more than 2 inches	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

Classification of Defects.

Defect	Major	Minor
f. Seam and stitch types		
1. Not specified seam or stitch type		X
2. Looper thread on outside (when 401 stitch is used)	X	
g. Stitch tension		
1. Loose tension resulting in loose joining seam	X	
2. Loose tension on edge or topstitching recognized by loosely exposed loops of lower or top thread		X
3. Tight tension (stitches break when normal strain is applied to the seam or stitching): Classify and score as open seam 1/		
1/ A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more continuous skipped or runoff stitches occur. On double stitched seams a seam is considered open when one or both stitches of the seam is opened.		
h Stitches per inch		
-less than minimum or more than maximum as specified		X
VII. HEM		
a. Hem puckered, twisted or pleated	X	
b. Hem finished more than 5/16 inch or less than 3/16 inch	X	
VIII. DIRECTION OF SEAM LAP		
Any seam not lapped in the direction specified	X	
IX. STAGGERED SEAMS		
The center front and center back panel seams staggered more than 1/4 inch at crown	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

Classification of Defects.

Defect	Major	Minor
X. FASTENER TAPE		
a. Misplaced, i.e., out of position in excess of 1/4 inch	X	
b. Foreign matter (threads, etc) trapped on hook tape		X
c. Other than width or type specified	X	
d. Other than color required		X
XI. IDENTIFICATION (label and radiation symbol)		
a. Label		
1. Omitted, incorrect or illegible	X	
2. Misplaced		X
b. Radiation symbol		
1. Omitted, incorrect or illegible	X	
2. Placed less than 1-1/4 or more than 1-3/4 inches from either front opening edge or bottom edge of cape		X

4.4.2.2 Dimensional examination. Any measurement deviating from the nominal dimensions and tolerances specified in the Table of measurements shall be scored as a measurement defect.

4.4.2.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's) expressed in defects per 100 units, for visual and dimensional examination shall be as follows:

	AQL'S	Inspection levels
For examination in 4.4.2 1 Major	1 0	II
Total (Major and Minor combined	10.0	II
For examination in 4 4 2 2 One class of defect	2 5	S-3

Source: https://assist.dla.mil -- Downloaded: 202640-23T06:56Z
Check the source to verify that this is the current version before use.

4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be on the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 1.0 defects per hundred units in accordance with MIL-STD-105.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate, application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling bulged or distorted container.
Content	Number of items per shipping container is more or less than required. Size shown on one or more items not as specified on shipping container. 1/

1/ For this defect, one item from each shipping container in sample shall be examined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

4.4.4 Palletization examination. An examination shall be made to determine that palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspected lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 2 5 in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application

5. PACKAGING

5.1 Preservation Preservation shall be level A or C as specified (see 6.2)

5.1.1 Level A. Each hood, with the front closed, shall be laid out flat, face up. The flared side shall be folded in to meet approximately at the center of the hood. Fold the hood approximately in half by bringing the crown down to the bottom edge. The hood shall again be folded approximately in half by superimposing one side over the other with the fold at either side of the front closure tape. The folded hood shall measure approximately 7-1/2 inches by 11-1/4 inches. Five folded hoods shall be stacked together to form a bundle, and tied with cotton tape or twine.

5.1.2 Level C. Hoods shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution

5.2 Packing. Packing shall be level A or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202610-23T06:56Z
Check the source to verify that this is the current version before use.

5.2.1 Level A Packing. Thirty hoods packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to Type CF class weather-resistant, grade V15c, size 1A of MIL-B-17757. The fiberboard for the loner shall conform to Type CF, class domestic conforming to MIL-B-17757. Level A packages shall be packed flat, two in length, one in width, and fifteen in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

5.2.2 Level B Packing. Thirty hoods packaged as specified in 5.1, shall be packed in a fiberboard container assembled and closed conforming to Type CF, variety DW, class domestic, grade 200 size 1A of MIL-B-17757. The fiberboard for the liner shall conform to Type CF, class domestic, of MIL-B-17757. Level A packages shall be packed flat, two in length, one in width and fifteen in depth within a shipping container.

5.2.3 Level C. Item packaged, as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, unit packs, intermediate or exterior containers, and palletized unit loads shall be marked in accordance with MIL-STD-129.

5.4 Palletization. When specified (see 6.2) item, packed as specified shall be palletized on a 4-way entry pallet in accordance with load type 1a of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding methods C and D or Film bonding F or G. Pallet patterns shall be in accordance with the appendix of MIL-STD-147.
The pallet shall be 4-way, type IV; class 1, size 2, or type VIII, fabricated from wood group I, II, III, or IV, grade A of NN-P-71, or 4-way, style 1, size A, type I, class 1 fabricated from wood groups specified, of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.5 DoD material procedures and applications of packaging requirements When specified (see 6.2), Preservation and Packing shall be in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The hoods are intended to be used as a protective garment by personnel working in low level radioactive contaminated areas in conjunction with the coveralls, gloves and footwear items of the related radioactive contaminants protective outfit.

6.2 Acquisition requirements Acquisition documents should specify the following:

a. Title, number and date of this specification.
b. Issue of DODISS to be cited in the solicitation and, if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
c. When first article inspection is required, (see 3.2) the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangement for examinations, quantity, testing and approval of the first article.
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
e. When palletization is required (see 5.4).
f. When all packaging data is to be found in MIL-STD-2073-1 and MIL-STD-2073-2 (see 5.5).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids (see 3.1 and 3.5).

6.4 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

6.5 Subject term (key word) listing.

Head protector, low level radiation
Head protector, polyester/cotton twill
Head protector, unit of RCP outfit

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

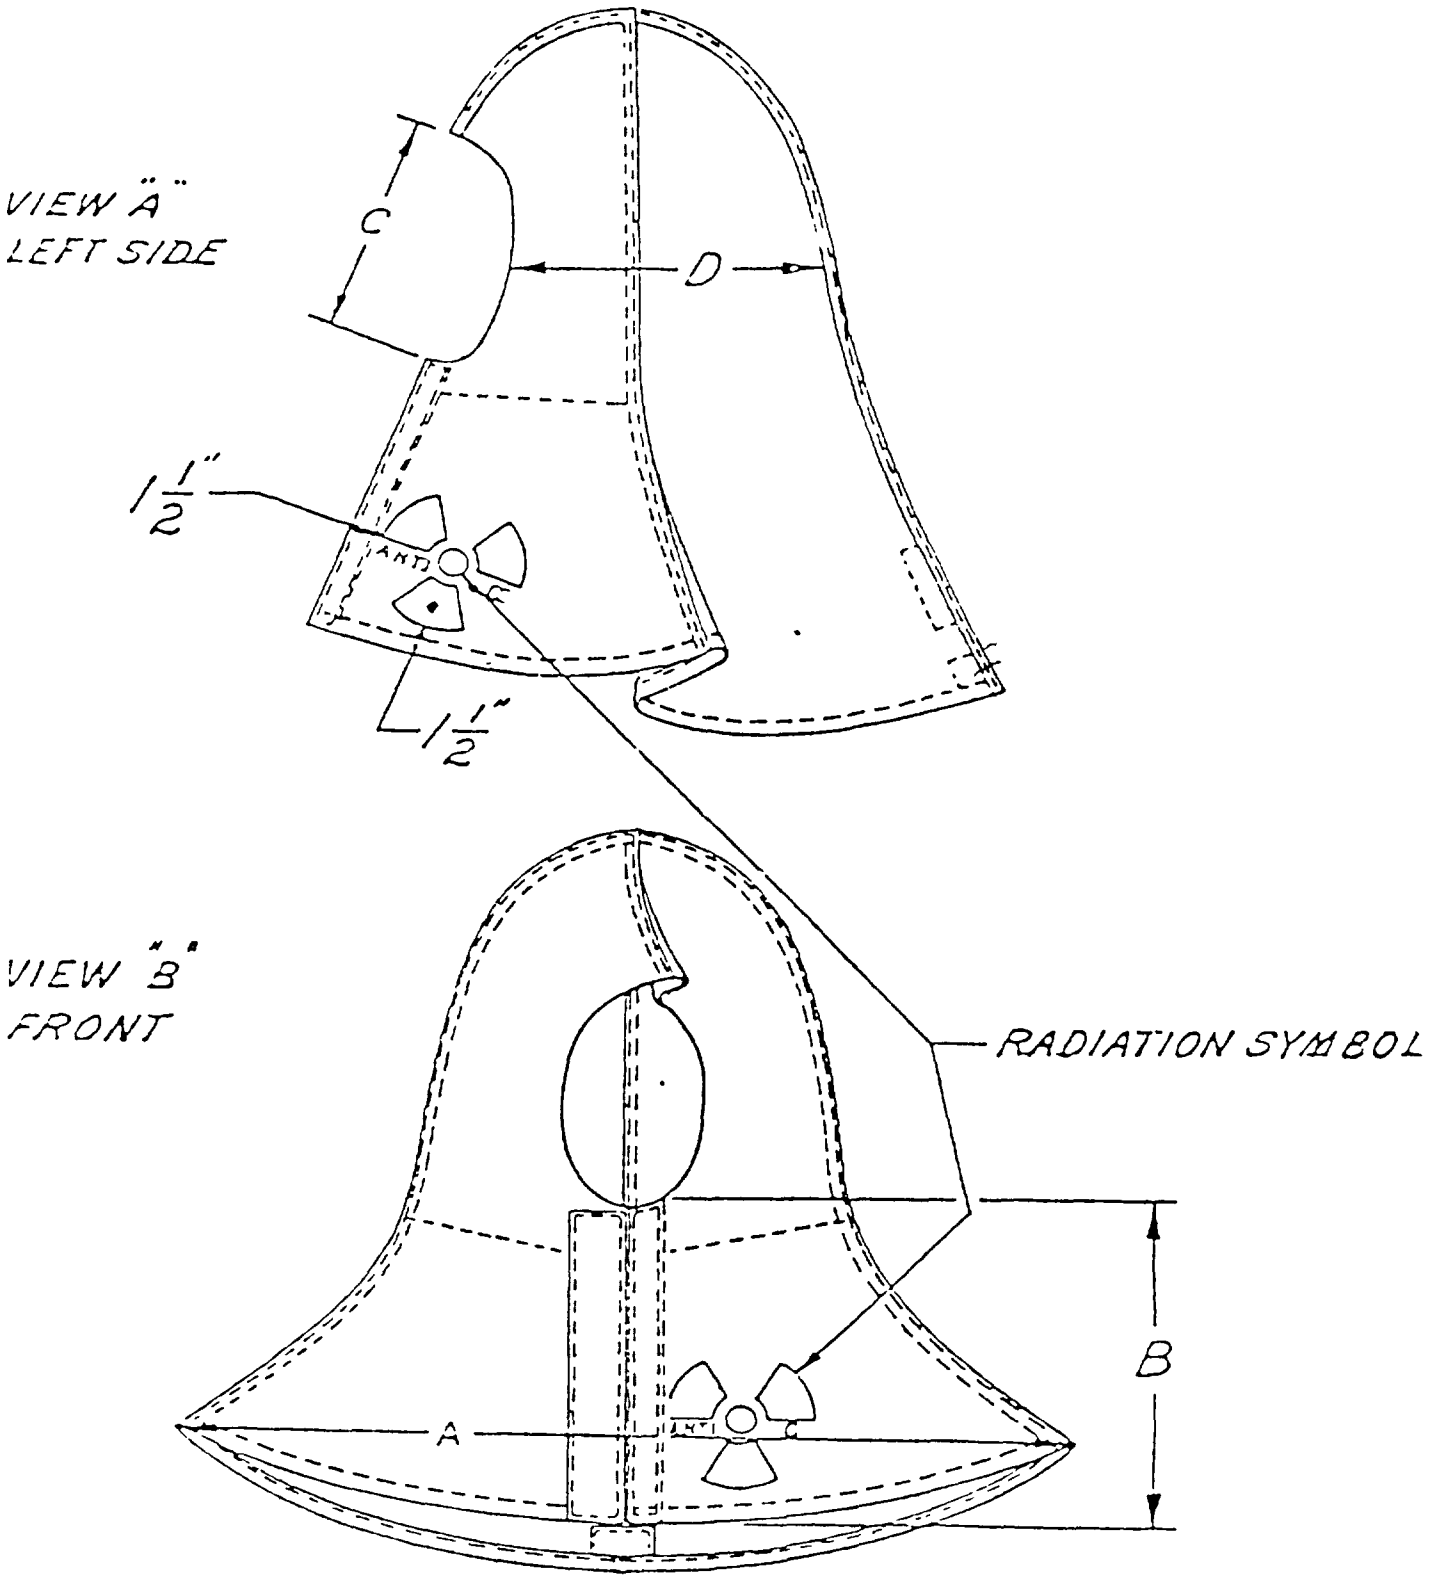


FIGURE 1, HOOD, RADIOACTIVE CONTAMINANTS PROTECTIVE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

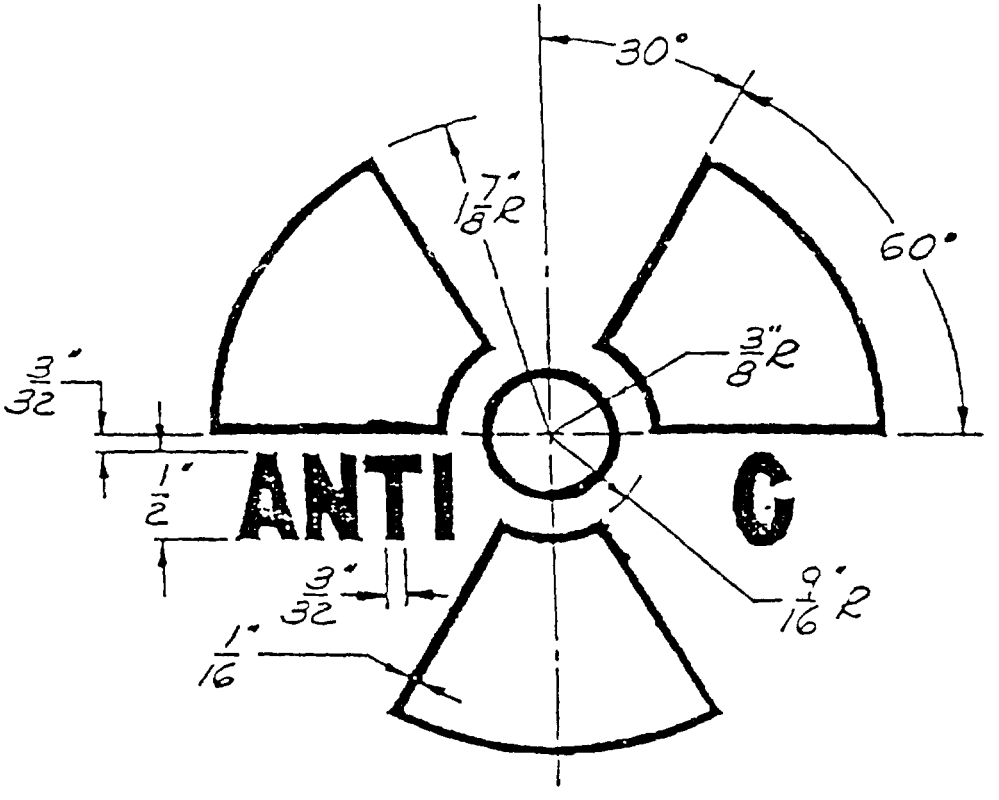


FIGURE 2, RADIATION SYMBOL

Source: https://assist.dla.mil -- Downloaded: 202640-23T06:56Z
Check the source to verify that this is the current version before use.

Custodian:
Navy - NU
Air Force - 99

Review Activity:
Navy - AS
Air Force - 82, 45

User Activity:
Navy - OS

Preparing activity:
DLA - CT

Project No. 8415-0910

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8 In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7
3. The preparing activity must provide a reply within 30 days from receipt of the form

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

I RECOMMEND A CHANGE:	1 DOCUMENT NUMBER MIL-H-82214F	2 DOCUMENT DATE (YYMMDD) 930323

3 DOCUMENT TITLE
HOOD, RADIOACTIVE CONTAMINANTS, PROTECTIVE

4 NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible Attach extra sheets as needed)*

5 REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8 PREPARING ACTIVITY

a NAME Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	b TELEPHONE (Include Area Code) (1) Commercial 215-737-8105	(2) AUTOVON 444-8105
c. ADDRESS (Include Zip Code) 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete*

Source: https://assist.dla.mil -- Downloaded: 2026-04-23T06:56Z
Check the source to verify that this is the current version before use.