MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

INDICATORS, POINTER

FSC-EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Automated Engineering
Document Preparation System,
Indicators, Pointer

MIL-STD-35-109(MI)

1. This Military Standard is approved by the U.S. Army Materiel Development and Readiness Command, Department of the Army, and is approved for use by all its activities. All other military activities are required to employ this Standard where suitable.

2. Recommended corrections, additions or deletions should be addressed to Comnander, U.S. Army Missile Command, ATTN: DRSMI-RCS, Redstone Arsenal, Alabama 35809.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

FOREWARD

1. The purpose of MIL-STD-35-109(MI) is to facilitate the preparation of Military Specification, Exceptions for Indicators. Pointer.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the basic MIL-STD-35.

3. It is important that the procedure described in the basic document (MIL-STD-35C) and subsequent revisions be followed explicitly in order for the computer to produce a document suitable for competitive procurement. Information which is standard for all dask-numbered parts has been included In the basic document at the Issuance of MIL-STD-35C. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS

SECTION	TITLE	INSTR PAGE	SRL PAGE
SECTION 1	INTRODUCTION	1	
1.1	Scope	1	
1.2	Purpose	1	
1.3	Format	1	
1.4	Military Specification, Exception Title Index	2	
1.4.1	Title	2	
1.4.2	Index	3	
SECTION 2	APPLICABLE DOCUMENTS	12	
SECTION 3	DEFINITIONS	17	
SECTION 4	GENERAL DESCRIPTION OF AEDPS	19	
SECTION 5	DETAILED DESCRIPTION OF AEDPS	21	
5.1	Introduction	21	
5.2	Specification Requirement Sheet (SRS)	21	
5.3	Specification Requirements	21	
5.4	Code 1006 Requirements and Test Methods	21	
5.5	Approved Item Name Code	22	
5.6	Dimensions and Figures	22	
5.7	Applicable Documents	22	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.8	Tabulation	26	
5.9	Design and Construction	28	111
5.9.1	Indicator Scale Range	28	111
5.9.2	Indicator Sub Scale Range	29	114
5.9.3	Port Configuration	30	116
5.9.4	Minimum Zero Adjust From Initial Point	31	117
5.9.5	Hermetic Seal	31	118
5.9.6	Case	32	118
5.9.7	Pointer	32	119
5.9.8	Cover Glass	32	119
5.9.9	Parallax	33	119
5.9.10	Bearings	33	119
5.9.11	Lubrication	33	120
5.9.12	Filling Media	33	120
5.9.13	Electrical Receptacle	34	120
5.9.14	Overload Protection	34	121
5.9.15	Maximum Weight	34	121
5.9.16	Dial Marking	34	121
5.9.17	Indicator Input	36	122
5.9.18	Indicator Power	36	122

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.9.19	Lighting Circuit Voltage	36	123
5.10	Acceleration	37	124
5.11	Cold Junction Compensator Lag	38	125
5.12	Current, Resistance Bulb	39	126
5.13	Damping	40	127
5.14	DC Resistance	41	132
5.15	Dead Spot	42	133
5.16	Dielectric Withstanding Voltage at Reduced Barometric Pressure	43	133
5.17	Dielectric Withstanding Voltage at Sea Level	44	135
5.18	Dust	46	137
5.19	Effect of Lead Length	47	139
5.20	Electromagnetic Interference	48	140
5.21	Endurance	49	141
5.22	Error, Friction	50	143
5.23	Error, Pointer Zero Position	53	146
5.24	Error, Position	54	147
5.25	Error, Scale	57	151
5.26	Fogging	61	155
5.27	Frequency Cycling	61	156

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.28	Fungus	63	158
5.29	Helium Test	64	158
5.30	Humidity	64	159
5.31	Hysteresis	67	162
5.32	Immersion	68	164
5.33	Indication, Power Off	69	165
5.34	Insulation Resistance	70	166
5.35	Leakage, Diaphragm Capsule	71	168
5.36	Life, Lamp	72	169
5.37	Lighting	73	170
5.38	Low Liquid Level arning Circuit	74	171
5.39	Magnetic Effect	74	172
5.40	Mounting Lugs	75	173
5.41	Open and Short Circuit	75	174
5.42	Operation, Reduced Voltage	76	775
5.43	Overpressure	77	176
5.44	Overspeed and Reverse	80	179
5.45	Power Consumption/Indicator Current	81	181
5.46	Press To Test Circuit	82	182

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.47	Rain	82	182
5.48	Reliability Screening (Burn-In, Aging, Conditioning, Stabilization, Load Life, Overload)	83	183
5.49	Resistance to Soldering Heat	85	185
5.50	Response	86	186
5.51	Salt Fog	87	187
5.52	Seal	88	188
5.53	Sensitivity	91	191
5.54	Shock	91	192
5.55	Solderability	94	194
5.56	Starting And Warmup, Low Temperature	95	195
5.57	Starting, Room Temperature	96	197
5.58	Surge, Voltage	97	198
5.59	Temperature - Altitude	98	200
5.60	Temperature, High	99	201
5.61	Temperature, Low	100	202
5.62	Temperature Rise, Indicator	102	203
5.63	Terminal, Strength	102	204
5.64	Thermal Shock	104	206
5.65	Unit Torque Gradient	104	206

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.66	Variation, Voltage and Frequency	105	207
5.67	Vibration	106	209
5.68	Vibration, High Frequency	107	210
5.69	Zero, Electrical	108	211
5.70	Zero Error At Low Temperature	109	212
5.71	Zero Error During Temperature Change	110	213

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM (AEDPS)

INDICATORS, POINTER

SECTION 1

INTRODUCTION

1.1 Scope

This dash-numbered part of the Automated Engineering Document Preparation System, MIL-STD-35, covers detailed requirements of Indicators, Pointer.

1.2 Purpose

The purpose of this dash-numbered part of MIL-STD-35 is to provide a requester necessary information to properly prepare a rquest for an Indicator, Pointer Military Specification Exception (MSE).

1.3 Format

The requester will find it impossible to complete an SRS using only this dash-numbered part of MIL-STD-35C. These specification requirements are not repeated in each dash-numbered part. The following list contains subjects from MIL-STD-35 which are pertinent to every dash-numbered part unless othewise excepted.

General Description of AEDPS
Part Numbering
Specification Requirement Sheet
Writing Methodology
Mandatory Specification Requirements
General Specification Requirements
Dimensions and Drawings
Applicable Documents
Materials
Finishes
Inspections
Single and Multi-item Specifications (Tabulation)
Sources
Search
General Instructions for SRL
Tables

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Military Specification, Exception Title Index

1.4.1 Title

The title of a generated MSE must be selected from one of the MSE titles listed in the Military Specification Exception Title Index (see 1.4.2). If a suitable MSE title is not found In the Index, a request should be forwarded to USAMICOM, ATTN: DRSMI-RCS, along with the desired title, and a related document. A code will be assigned and the code, title, and related document will made a part of the Index. The requester will be notified of the assigned code.

One of the six-digit characteristic value codes, listed as Codes in the Index, entered on a Specification Requirements Sheet (SRS), will specify that the title of the MSE will be the title shown with that code in the Index.

Each MSE title listed In the Index is compatible with the document(s) listed with that title under Related Document. The list of related documents may or may not be a complete listing. The information contained under Related Document Coverage is intended for the requester's reference; when more than one document is listed for a MSE title, this information will be found useful In determining which of the documents is most suitable for use as the applicable general specification. When no document is listed under Related Document, exception may be taken to the most appropriated document listed in the Index under any other MSE title.

The MSE title mayor may not be the same as the title used in DODISS, FIIG or the document to which the MSE document was written. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist a designer in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of devices. If the item selected from the AEDPS document becomes an item of supply, then the Cataloging Handbook H6 nomenclature must be used. Under each MSE title is the applicable FIIG Item Name Code from Cataloging Handbook H6 and the Federal Stock Class from the Standardization Directory (SD-1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Documents referenced in the MSE that will be listed in the Applicable Documents paragraph (2.1) of the MSE will be identified by the exact title that appears on the referenced document. Titles of MSE'S, titles from DODISS, or titles from FIIG's will not be entered in paragraph 2.1.

1.4.2 Index

MSE Title: Indicator, Angle of Attack — Code 032001
Federal Stock Class 6610
FIIG Item Name Code 05168

Related Document Number	Coverage
MIL-I-18856	28 VDC
MS28062	
MS28067	
MIL-I-83266	ARU - 29/A

MSE Title: Indicator, Electrical Tachometer — Code 032002
Federal Stock Class 6620
FIIG Item Name Code 08260

Related Document Number	Coverage
MIL-I-5573	0-110 Percent RPM , Jet or Propjet
MIL-I-7069	Percent Speed, Aircraft
MIL-I-7186	Sensitive
MIL-I-8580	0-4000 RPM
MII-I-19358	Type ERU-7/A
MIL-I-22596	0-120 Percent RPM
MS21971	
MIL-I-23832	Triple Pointer, Helicopter
MS18099	
MIL-I-25623	0-110 Percent RPM, Type MU-1
MIL-I-25686	0-4000 RPM
MIL-I-25687	ERU-2/A
MIL-I-25689	500- 4,000 RPM
MIL-I-25863	0-110 Percent RPM, ERU-5/A
MIL-I-27202	O-110 Percent RPM, ERU-6/A
MIL-I-38391	Dual Pointer

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

MSE Title: Indicator, Fault Locating — Code 032003
Federal Stock Class 5999
FIIG Item Name Code 60639

Related Document Number	Coverage
MIL-I-83287	

MSE Title: Indicator, Indicated Air Speed — Code 032004
Federal Stock Class 6610
FIIG Item Name Code 03445

Related Document Number	Coverage
MIL-I-5356	Type L-7A
MIL-I-5392	Type K-3
MIL-I-5415	General Specification
MIL-I-5416	10-150 Knots
MS28045	
MIL-I-5417	40 - 400 Knots
MS28046	
MIL-I-5418	50 - 650 Knots, Sensitive
MS28047	
MIL-I-5419	50 - 650 Knots, Maximum Allowable Speed
MS28048	
MIL-I-5721	20 - 250 Knots
MS28021	
MIL-I-8315	Airspeed and Mach Number
MIL-I-8394	50 - 700 MPH
MIL-I-19570	80 - 850 Knots
HS28095	
MIL-I-21718	40 - 400 Knots
MS25333	
MIL-I-21735	60 - 650 Knots
HS28089	
MIL-I-23671	80 - 850 Knots
MS17264	
MIL-I-25137	Type ME-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 032004
(Cont)

Related Document (Cont)

Number	Coverage
MIL-I-27197	Mach Number and Maximum Allowable Speed
MIL-I-27279	Mach Number
MIL-I-27280	AVU-10/A
MIL-I-27851	AVU-17/A
MIL-I-38135	AVU-19/A, Standby
MIL-I-83152	AVU-22/A
MIL-I-83334	AVU-23/A

MSE Title: Indicator, Liquid Quantity Code 032005
Federal Stock Class 6680
FIIG Item Name Code 03377

Related Document

Number	Coverage
MIL-I-25645	Liquid Oxygen, General Specifi cation
MIL-I-26376	GMU-11/A
MIL-I-26377	GMU-10/A
MIL-I-26380	GMU-5/A
MIL-I-26382	A/A24J-4
MIL-I-27220	A/A24J-8
MIL-I-27544	Liquid Oxygen, GMU-28/A, GMU-28A/A
MIL-I-27677	Liquid Oxygen, GMU-34/A, GMU-34A/A
MIL-I-27882	GMU-37/A
MIL-I-38021	GMU-39/A
MIL-I-38468	GMU-59/A
MIL-I-81387	Liquid Oxygen, GMU-60/A, GMU-61/A, GMU-62/A, GMU-63/A
MIL-I-81388	Liquid Oxygen, GMU-64/A, GMU-65/A, GMU-66/A, GMU/67A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

MSE Title: Indicator, Position — Code 032006
Federal Stock Class 6610
FIIG Item Name Code 16127

Related Document Number	Coverage
MIL-I-5170	Horizontal Stabilizer
MS28013	
MIL-I-5184	Wing Flaps
MS28023	
MIL-I-7057	Synchro, Aircraft, General Specification
MIL-I-7062	Control Services, General Specification
MIL-I-7063	Rudder Trim Tab
MIL-I-7064	Elevator Trim Tab
MIL-I-7065	Aileron Trim Tab
MIL-I-7066	Flaps, 0-30 Degree Marking
MS28001	
MIL-I-7067	Flaps, 0-60 Degree Marking
MS28003	
MIL-I-25931	Landing Gear
MS27202	
MIL-I-27191	Variable Nozzle
MS24572	
MIL-I-27203	Wing Flap, ALU-3/A, ALU-3A/A
MIL-I-27672	Horizontal stabilizer
MIL-I-83362	Takeoff Trim

MSE Title: Indicator, Pressure — Code 032007
Federal Stock Class 6620
FIIG Item Name Code 03378

Related Document Number	Coverage
MIL-I-5099	Cabin Air
MIL-I-5482	Aircraft
MS25470	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 032007
(Cont)

Related Document (Cent)

Number	Coverage
MIL-I-6301	0-600 PSI
MIL-I-6514	Oi1
MIL-I-6856	0-5, 0-10, 0-25 PSI
MIL-I-7057	Synchro, Aircraft, General Specification
MIL-1-7084	0-4000 PSI
MIL-I-7085	0-50 PSI
MIL-I-7086	0-100 PSI
MIL-I-7087	0-200 PSI
MIL-I-7304	Sensitive
MIL-I-7307	Type A-10
MIL-I-8138	O-35 Scale
MIL-I-8404	O-35 PSI
MIL-I-18997	General Specification
MIL-I-22054	Dual, General Purpose
MS25477	
MIL-I-23252	Nitrogren Use
MIL-I-23479	Multiple Ranges
MS17996	
MIL-I-25091	Cabin Air
MIL-I-25130	Oil, O-300 PSI
MIL-I-25437	Voltage Ratio Type, General Specification
MIL-I-25438	Type MO-2
MIL-I-25578	0-50 PSI
MIL-I-25861	Hydraulic, 0-4000 PSI
MIL-I-25862	Oil, 0-100 PSI, AGU-2/A
MIL-I-25950	Oil, O-100 PSI, EGU-1/A EGU-12/A
MIL-I-27188	Oil, 0-100 PSI, EGU-2/A
MIL-I-27189	Oil, Used With TRU-66/A Transmitter
MS24576	
MIL-I-27190	Hydraulic, 0-4000 PSI
MIL-I-38121	EGU-9/A
MIL-I-38133	Oil, EGU-10/A, EGU-11A
MIL-I-83245	Oil, A/A24J-17
MIL-I-83361	Oil, 0-100 PSI
MS28010	Synchro, Single

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

MSE Title: Indicator, Rate of Flow Code 032008
Federal Stock Class 6620
FIIG Item Name Code 16124

Related Document Number	Coverage
MIL-I-5751	Sensitive
MIL-I-5914	Fuel, Type A-16
MIL-I-6599	Fuel, Type A-19
MIL-I-7057	Synchro, Aircraft, General Specification
MIL-I-7203	Fuel, EFU-28A, EFU-29A
MIL-I-7491	Fuel, Totalizing
MIL-I-8276	Fuel, Type MA-2
MIL-I-8411	Airflow
MIL-I-9304	Fuel, 0-12,000 PPH, Type MA-6
MIL-I-15216	Steam
MIL-I-21206	Fuel, 300-5000-15000 PPH
MIL-I-22139	Fuel, 0-12,000 PPH
MIL-I-23533	Fuel, 0-12,000 PPH, EFU-21/A
MIL-I-23870	0-15 GPM
NIL-I-25324	Fuel, 0-12,000 PPH
MIL-I-25906	Fuel, 0-15,000 PPH
MIL-I-26299	0-5,000 PPH
MIL-I-27304	Fuel, EFU-15A/A
MIL-I-38120	Fuel, EFU-20/A
MIL-I-38143	Fuel, EFU-22A/A
MIL-1-81186 MS90360	Fuel, 0-5000 PPH
MIL-I-83026	Fuel, EFU-26/A
MIL-I-83241	Fuel, EFU-33/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

MSE Title: indicator, Temperature, Electrical Resistance code 032009
Federal Stock Class 6685
FIIG Item Name Code 03380

Related Document Number	Coverage
MIL-I-6533	Multi-function
MIL-I-6669	-70 Deg to +150 deg C, Multifunction
MIL-I-6681	Cylinder Head, 0-300 Deg C, Clamp Mounted
MIL-I-7070	General Specification
MIL-I-7075	-50 to +50 deg C, Air
MS28008	
MIL-1-7077	-70 deg to +150 deg C, Oil and Coolant
MIL-I-7112	Cylinder Head, O deg C to 300 deg C
MIL-1-7723	-70 deg C to +150 deg C, Dual Pointer
MS90375	
MIL-1-7749	-70 deg C to +150 deg C, EHU-18/A
MIL-I-8505	-50 deg to +300 deg C
AN5792	
MIL-I-27665	-50 deg to +50 deg C, ABU-10/A
MIL-I-27667	-70 deg to +150 deg C, EHU-16A/A, EHU-29/A
MIL-I-27674	-50 deg to +200 deg C
MIL-I-27676	EHU-21A
MIL-I-81049	Voltage Compensated, Multifunction
MS90322	
MS28004	Cylinder Head, 0-300 deg C
MS28009	Multifunction, -70 deg to +150 deg C

MSE Title: Indicator, Temperature, Thermocouple Cede 032010
Federal Stock Class 6685
FIIG Item Name Code 03395

Related Document Number	Coverage
MIL-I-7071	General Specification
MIL-1-7074	-50 deg to +300 deg C
MS28007	
MIL-I-7884	Multifunction
MS90410	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 032010
(Cont)

Related Document (Cont)

Number	Coverage
MIL-I-9343	Engine Exhaust, MJ-1
MIL-I-9443	Engine Exhaust, MJ-2
MIL-I-25026	Engine Exhaust, MJ-4
MIL-I-25852	EHU-4/A
MIL-I-27209	Self-balancing, Potentiometer Type, Multifunction
MS24569	
MIL-I-27552	Potentiometer Type
NIL-I-55196	Cylinder Temperature, Air-Cooled Engine
MIL-I-83262	Self-balancing Potentiometer, Exhaust Gas

MSE Title: Indicator, Thrust — Code 032011
Federal Stock Class 6620
FIIG Item Name Code 03381

Related Document

Number	Coverage
MIL-I-7057	Synchro, Aircraft, General Specification
MIL-I-25859	Pressure Ratio

MSE Title: Indicator, Torquemeter — Code 032012
Federal Stock Class 6620
FIIG Item Name Code 16511

Related Document

Number	Coverage
MIL-I-7057	Synchro, Aircraft, General Specification
MIL-I-22126	Engine, Turboprop
MS90323	
MIL-I-27683	Engine, Dual

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

MSE Title: Indicator, True Air Speed Code 032013
Federal Stock Class 6610
FIIG Item Name Code 03447

Related Document Number	Coverage
MIL-I-5154	Type M-5
MIL-I-6447	Type M-1A
MS28036	
MIL-I-7057	Synchro, Aircraft, General Specification
MIL-I-7231	Type N-1
MIL-I-8241	Type Q-1
MIL-I-27673	AVU-15/A

MSE Title: Indicator, Vertical Velocity Code 032014
Federal Stock Class 6610
FIIG Item Name Code 03448

Related Document Number	Coverage
MIL-I-7721	0-6000 fpm, 3 inch
MS28049	
MIL-I-18804	O-6000 fpm, 2 inch
MS28075	
MIL-I-27196	0-6000 fpm AAU-9/A
MIL-I-38139	0-6000 fpm, AAU-18/A
MIL-I-58067	Rapid Response, Acceleration Sensitive, Multirange
MS25454	
MIL-I-83128	Rapid Response, Acceleration Sensitive, AAU-25/A, AAU-26/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SECTION 2

APPLICABLE DOCUMENTS

The following documents form a part of this Standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-I-5415	Indicators; Airspeed, Pitot-Static Pressure, General Specification for
MIL-I-6447	Indicator, True Airspeed, Type M-1A
MIL-I-7057	Indicator, Synchro, Aircraft, General Specification for
MIL-I-7062	Indicators, Position, Control Surfaces, 28 Volt DC, General Specification for
MIL-I-7069	Indicators, Tachometer, Electric, Percent Speed Type, Aircraft, General Specification for
MIL-I-7070	Indicator, Temperature, Electrical Resistance, Hermetically Sealed, General Specification for
MIL-I-7071	Indicator, Temeprature, Thermocouple, Hermetically Sealed, General Specification for
MIL-I-7084	Indicator, Pressure, Hydraulic, 0-4000 PSI
MIL-I-7721	Indicator, Vertical Speed, 3-inch
MIL-I-7884	Indicators, Temperature, Thermocouple
MIL-I-8411	Indicator, Airflow, Pressurized Cabin, Type A-1
MIL-I-19358	Indicator, Tachometer, Electric, Hermetically Sealed, Type ERU-7/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS (Cont)

MILITARY

MIL-I-22054	Indicators, Pressure, Synchro, Dual. General Purpose
MIL-I-22126	Indicator, Torquemeter, Engine. Turbo-prop
MIL-I-23832	Indicator, Tachometer, Triple Pointer, Helicopter
MIL-I-25437	Indicators, Aircraft, Pressure, Voltage Ratio Type, General Specification for
MIL-L-25467	Lighting, Integral, Aircraft Instrument, General Specification For
MIL-I-25645	Indicator, Liquid Oxygen Quantity, Capa-citance Type, General Specification For
MIL-I-25687	Indicator, Electrical Tachometer, ERU-2/A
MIL-I-26299	Indicators, Rate of Flow, 0-5000 PPH, Integrally Lighted
MIL-L-27160	Lighting, Instrument, Integral, White General Specification for
MIL-I-27676	Indicator, Temperature, Electrical Resistance
MIL-I-38135	Indicator, Indicated Airspeed AVU-19/A, Standby
MIL-I-38139	Indicator, Vertical Velocity, AAU-18/A, Integrally Lighted Standby
MIL-I-38143	Indicator, Rate of Flow, Fuel
MIL-I-38391	Indicator, Electrical Tachometer, ERU-12/A 0-350 RPM (Rotor), 0-7000 RPM (Engine)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS (Cont)

MILITARY

MIL-I-81049	Indicator, Temperature, Electrical Resistance, Voltage Compensated, Multi-function
MIL-I-81387	Inculcators, Liquid Oxygen Quantity
MIL-I-81388	Indicator Repeaters, Liquid Oxygen Quantity
MIL-I-83026	indicator, Rate of Flow, Fuel EFU-26/A
MIL-I-83262	Indicator, Temperature, Thermocouple, Self-Balancing Potentiometer
MIL-I-83266	Indicator, Angle of Attack ARU-29/A
MIL-I-83334	Indicator, Indicated Airspeed AVU-23/A
MIL-I-83361	indicator, Pressure, Oil, Dual EGU-18/A, 0-100 PSI
MIL-I-83362	Indicator, Position, Takeoff Trim ALU-12/A

STANDARDS

MILITARY

MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-461	Electromagnetic Interference Characteristics Requirements for Equipment
MIL-STD-462	Electromagnetic Interference Characteristics, Measurements of
MIL-STD-810	Environmental Test Methods

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

OTHER PUBLICATIONS

ASTM E380 Metric Practice Guide

(Copies of Standards and Handbooks required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SECTION 3

DEFINITIONS

Definitions contained in MIL-STD-35 are applicable Inicators, Pointer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SECTION 4

GENERAL DESCRIPTION AEDPS

The general description of AEDPS contained in MIL-STD-35 is applicable to Indicators, Pointer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SECTION 5

DETAILED DESCRIPTION OF AEDPS

5.1 Introduction

The detailed description of AEDPS applicable to Indicators, Pointer consists of the following:

a. The detailed description of AEDPS specified in MIL-STD-35.

b. The additional detailed description contained in this section.

5.2 .Specification Requirement Sheet (SRS)

Specification Requirement Sheet (SRS) requirements described in MIL-STD-35 and at the end of this dash-numbered part are applicable to Indicators, Pointer.

5.3 Specification Requirements

All specification requirements described in MIL-STD-35 are applicable to Indicators, Pointer.

Refer to ASTM E380 for guidance in using the International System *of* Units (SI).

5.4 Code 1006 Requirements and Test Methods

Instructions for using "... per 1006 document" "and" "... per 1006 document except ___" requirements and test methods are explained in MIL-STD-35.

The test method per 1006 code and requirements per 1006 code from the same test shall not be used together. This condition would indicate no exception is being specified. If a test method code(s) has been selected, it is mandatory that a requirement code be selected; and if a requirement code has been selected, it is mandatory that a test method code(s) be selected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

5.5 Approved Item Name Code

The approved item name code to be entered on the SRS with Code 1007 is the FIIG item name code depicted with the specification title chosen from the MSE Title Index (see 1.4.2). Only the FIIG item name code number shall be entered on the SRS with Code 1007.

5.6 Dimensions and Figures

All specification requirements for dimensions and figures described in MIL-STD-35 are applicable.

The figures applicable to Indicators, Pointer are contained in Section 7.

5.7 Applicable Documents

The documents listed in the Applicable Document List of Section 5 of MIL-STD-35 and appropriate codes from Table B of MIL-STD-35 shall be entered on the SRS. In addition, the appropriate documents shown in the DOCUMENTS column below and the applicable codes from Table B of MIL-STD-35 shall be entered on the SRS when the codes listed in the CODES column are used to specify tests or requirements. Shown parenthetically in the CODES column is a reference to the applicable test or requirements. A document designation, with a code from Table B, is entered on the SRS only once.

DOCUMENTS	CODES
MIL-I-7070	3304 (Open and Short Circuit)
MIL-I-7721	3834 Zero Error at Low Temperature) 3854 Zero Error During Temperature Change)
MIL-I-7884	2034 (Cold Junction Compensator Lag)
MIL-I-19358	3424 (Overspeed and Reverse) 3724 Temperature Rise, Indicator)
MIL-L-25467	3186 (Life, Lamp) 3204 (Lighting) 3214 (Lighting)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

DOCUMENTS	CODES (Cont)
MIL-I-25645	2224 (Dead Spot) 3224 (Low Liquid Level Warning Circuit) 3476 (Press to Test Circuit)
MIL-1-25687	3604 (Starting and Warmup, Low Temperature) 3644 (Starting, Room Temperature)
MIL-L-27160	3206 (Lighting) 3216 (Lighting)
MIL-I-81049	2074 (Current, Resistance Bulb) 3334 (Operation, Reduced Voltage)
MIL-I-83026	3104 (Hysteresis)
MIL-STD-202	1375 (Terminal Strength) 1447 (Vibration, High Frequency) 1511 Insulation Resistance) 2204 DC Resistance) 4672 (Solderability) 4683 (Solderability) 4698 Resistance to Soldering Heat) 4714 Thermal Shock) 4732 (Seal) 4810 (Immersion) 4862 (DWV at Sea Level) 6300 (DWV at Reduced Barometric Pressure) 6697 (Reliability Screening)
MIL-STD-461	1954 (Electromagnetic Interference) 1974 (Electromagnetic Interference)
MIL-STD-462	1956 (Electromagnetic Interference) 1958 (Electromagnetic Interference) 1960 (Electromagnetic Interference) 1962 (Electromagnetic Interference) 1964 (Electromagnetic Interference)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

DOCUMENTS	CODES (Cont)
MIL-STD-810	1514 (Vibration) 3488 (Rain) 3704 (Temperature - Altitude) 4755 (Fungus) 4780 (Salt Fog) 4871 (Humidity) 4953 (Dust) 6218 (Temperature, High) 6232 (Temperature, Low) 6252 (Acceleration) 7312 (Shock)
Document to which exception is taken.	1006

The following codes are entered with a document designation. The document designation must be entered again on the SRS with an appropriate code from Table B of MIL-STD-35.

CODE	ITEM
1702	Port One Configuration
1712	Port Two Configuration
1752	Case
1756	Case Color
1758	Pointer(s)
1762	Pointer Color
1764	Cover Glass
1766	Cover Glass Coating
1776	Bearings
1778	Lubrication
1782	Filling Media (Helium)
1788	Filling Media (Nitrogen)
1790	Electrical Receptacle
1826	Dial Marking
1902	Indicator Input

The Test Matrix is supplied to Indicate some of the applicable documents that can be used to specify specific tests. Any document referenced In the specification title index can be used to fill the requirement "Test per (dot des)," but only if the test specified is in the referenced document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

TEST MATRIX

DOCUMENT	TEST CODE	2104 DAMPING	2244 EFFECT OF LEAD LENGTH	2304 ENDURANCE	2334 ERROR, FRICTION	2444 ERROR, POSITION	2554 ERROR, SCALE	3004 FOGGING	3024 FREQUENCY CYCLING	3084 HELIUM TEST	3144 INDICATION, POWER OFF	3164 LEAKAGE, DIAPHRAGM CAPSULE	3254 MAGNETIC EFFECT	3274 MOUNTING LUGS	3354 OVERPRESSURE	3454 POWER CONSUMPTION/IND CUR	3504 RESPONSE	3564 SENSITIVITY	3664 SURGE, VOLTAGE	3754 UNIT TORQUE GRADIENT	3774 VARIATION, V AND FREQ	3814 ZERO, ELECTRICAL	
MIL-I-5415		X		X	X	X	X					X	X	X	X								
MIL-I-6447				X	X	X	X					X	X	X	X								
MIL-I-7057			X		X	X	X	X					X							X		X	
MIL-I-7062				X	X	X	X	X					X										
MIL-I-7069					X	X	X	X					X			X							
MIL-I-7070		X	X		X	X	X						X			X	X						
MIL-I-7071					X	X	X	X		X			X										
MIL-I-7084			X	X	X	X	X	X					X							X		X	
MIL-I-7721						X	X						X	X	X								
MIL-I-7884					X	X	X						X	X									
MIL-I-8411				X	X	X	X					X	X	X	X								
MIL-I-19358				X	X	X	X			X			X			X							
MIL-I-22054			X	X	X	X	X	X		X	X		X							X		X	
MIL-I-22126				X	X		X	X		X	X		X			X	X		X		X		
MIL-I-23832				X	X	X	X	X		X			X			X							
MIL-I-25437		X	X		X	X	X	X					X										
MIL-I-25645		X						X					X				X				X		
MIL-I-26299					X	X	X	X	X				X			X	X		X		X	X	
MIL-I-27676		X			X		X				X		X			X	X	X			X		
MIL-I-38135		X			X	X	X					X	X		X								
MIL-I-38139						X	X						X		X								
MIL-I-38143		X		X	X	X	X	X					X				X				X		
MIL-I-38391				X	X	X	X	X		X			X			X							
MIL-I-81049		X	X		X	X	X	X		X			X			X	X						
MIL-I-81387		X		X			X						X				X				X	X	
MIL-I-81388			X	X			X						X									X	
MIL-I-83026		X			X	X	X	X	X				X			X	X		X		X		
MIL-I-83262			X		X	X	X	X					X				X	X	X		X	X	
MIL-I-83266					X	X	X	X			X		X										
MIL-I-83334		X			X	X	X					X	X		X								
MIL-I-83361			X		X	X	X	X					X							X	X	y	
MIL-I-83362			X		X	ˇ	X	X					X			X				X	X	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

5.8 Tabulation

All specification requirements for tabulation described in MIL-STD-35 are applicable.

In addition to dimensions from Table A, characteristics in this dash-numbered part that are candidates for tabulation are contained in the following list. Table headings are shown as they will be printed in the MSE. Only characteristic codes from Table A and this list shall be entered on the SRS with codes from the Specification Requirement Sheet Tabulation Table of MIL-STD-35.

When different units of measure are shown for a specified parameter, only one may be tabulated. For example, where there are several codes which may be used to specify weight, each of which specifies a different unit of measure, only one code may be tabulated. However, equivalent U.S. or SI units of measure may be used for a specified parameter.

TABULATION CANDIDATES FOR INDICATORS, POINTER

TOP LINE	SECOND LINE	BOTTOM LINE	CODE
MIN SCALE	RA NGE	PSI	1562
MAX SCALE	RA NGE	PSI	1564
MIN SCALE	RA NGE	KPA	1566
MAX SCALE	RA NGE	KPA	1568
MIN SCALE	RA NGE	POUNDS/HR	1570
MAX SCALE	RA NGE	POUNDS/HR	1572
MIN SCALE	RA NGE	KG/HR	1574
MAX SCALE	RA NGE	KG/HR	1576
MIN SCALE	RA NGE	DEG C	1578
MAX SCALE	RA NGE	DEG C	1580
MIN SCALE	RA NGE	FT/MIN	1582
MAX SCALE	RA NGE	FT/MIN	1584
MIN SCALE	RA NGE	METRES/S	1586
MAX SCALE	RA NGE	METRES/S	1588
MIN SCALE	RA NGE	KNOTS	1590
MAX SCALE	RA NGE	KNOTS	1592
MIN SCALE	RA NGE	MACH NO.	1594
MAX SCALE	RA NGE	MACH NO.	1596
MIN SCALE	RA NGE	LITRES	1598
MAX SCALE	RA NGE	LITRES	1600
MIN SCALE	RA NGE	CU METRES	1602

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

TABULATION CANDIDATES FOR INDICATORS, POINTER (Cont)

TOP LINE	SECOND LINE	B0TTOM LINE	CODE
MAX SCALE	RANGE	CU METRES	1604
MIN SCALE	1 RANGE	RPM	1606
MAX SCALE	1 RANGE	RPM	1608
MIN SCALE	2 RANGE	RPM	1610
MAX SCALE	2 RANGE	RPM	1612
MIN SCALE	1 RANGE	PCT ENG SP	1614
MAX SCALE	1 RANGE	PCT ENG SP	1616
MIN SCALE	2 RANGE	PCT ENG SP	1618
MAX SCALE	2 RANGE	PCT ENG SP	1620
MIN SCALE	3 RANGE	PCT ENG SP	1622
MAX SCALE	3 RANGE	PCT ENG SP	1624
MIN SCALE	RANGE	NUMBER	1626
MAX SCALE	RANGE	NUMBER	1628
MIN SUB	SCALE RNG	PSI	1630
MAX SUB	SCALE RNG	PSI	1632
MIN SUB	SCALE RNG	KPA	1634
MAX SUB	SCALE RNG	KPA	1636
MIN SUB	SCALE RNG	POUNDS/HR	1638
MAX SUB	SCALE RNG	POUNDS/HR	1640
MIN SUB	SCALE RNG	KG/HR	1642
MAX SUB	SCALE RNG	KG/HR	1644
MIN SUB	SCALE RNG	DEG C	1646
MAX SUB	SCALE RNG	DEG C	1648
MIN SUB	SCALE RNG	FT/MIN	1650
MAX SUB	SCALE RNG	FT/MIN	1652
MIN SUB	SCALE RNG	METRES/S	1654
MAX SUB	SCALE RNG	METRES/S	1658
MIN SUB	SCALE RNG	KNOTS	1660
MAX SUB	SCALE RNG	KNOTS	1662
MIN SUB	SCALE RNG	MACH NO.	1664
MAX SUB	SCALE RNG	MACH NO.	1666
MIN SUB	SCALE RNG	LITRES	1670
MAX SUB	SCALE RNG	LITRES	1672
MIN SUB	SCALE RNG	CU METRES	1674
MAX SUB	SCALE RNG	CU METRES	1676
MIN SUB	SCALE RNG	NUMBER	1698
MAX SUB	SCALE RNG	NUMBER	1700

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

5.9 Design and Construction

5.9.1 Indicator Scale Range

The Indicator scale range unit of measure is specified by entering on the SRS minimum and maximum values. It is mandatory to specify the appropriate minimum and maximum values.

The following codes and values, entered on the SRS, will specify the indicator scale range in the units shown. For subscales, except tachometer indicators, see 5.9.2.

CODE	UNITS
1562	Pounds per Square Inch, Minimum
1564	Pounds per Square Inch, Maximum
1566	Kilopascals, Minimum
1568	Kilopascals, Maximum
1570	Pounds per Hour, Minimum
1572	Pounds per Hour, Maximum
1574	Kilograms per Hour, Minimum
1576	Kilograms per Hour, Maximum
1578	Degrees Celsius, Minimum
1580	Degrees Celsius, Maximum
1582	Feet per Minute, Minimum
1584	Feet per Minute, Maximum
1586	Metres per Second, Minimum
1588	Metres per Second, Maximum
1590	Knots, Minimum
1592	Knots, Maximum
1594	Mach Number, Minimum
1596	Mach Number, Maximum
1598	Litres, Minimum
1600	Litres, Maximum
1602	Cubic Metres, Minimum
1604	Cubic Metres, Maximum
1606	(Scale 1) Revolutions per Minute, Minimum
1608	(Scale 1) Revolutions per Minute, Maximum

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CODE	UNITS (Cont)
1610	(Scale 2) Revolutions per Minute, Minimum
1612	(Scale 2) Revolutions per Minute, Maximum
1614	(Scale 1) Percent of Rated Engine Speed, Minimum
1616	(Scale 1) Percent of Rated Engine Speed, Maximum
1618	(Scale 2) Percent of Rated Engine Speed, Minimum
1620	(Scale 2) Percent of Rated Engine Speed, Maximum
1622	(Scale 3) Percent of Rated Engine Speed, Minimum
1624	(Scale 3) Percent of Rated Engine Speed, Maximum
1626	Number, Minimum
1628	Number, Maximum

5.9.2 Indicator Sub Scale Range

When a sub scale is required with the indicator, the sub scale range unit of measure is specified by entering on the SRS minimum and maximum values. It is mandatory to specify the appropriate minimum and maximum values.

The following codes and values, entered on the SRS, will specify the Indicator sub scale range in the units shown.

CODE	UNITS
1630	Pounds per Square Inch, Minimum
1632	Pounds per Square Inch, Maximum
1634	Kilopascals, Minimum
1636	Kilopascals, Maximum
1638	Pounds per Hour, Minimum
1640	Pounds per Hour, Maximum
1642	Kilograms per Hour, Minimum

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CODE	UNITS (Cont)
1644	Kilograms per Hour, Maximum
1646	Degrees Celsius, Minimum
1648	Degrees Celsius, Maximum
1650	Feet per Minute, Minimum
1652	Feet per Minute, Maximum
1654	Metres per Second, Minimun
1658	Metres per Second, Maximum
1660	Knots, Minimum
1662	Knots, Maximum
1664	Mach Number, Minimum
1666	Mach Number, Maximum
1670	Litres, Minimum
1672	Litres, Maximum
1674	Cubic Metres, Minimum
1676	Cubic Metres, Maximum
1698	Number, Minimum
1700	Number, Maximum

5.9.3 Port Configuration

Code 1702 and a document designation, entered on the SRS, will specify the port one configuration shall be in accordance with the document.

Code 1704 and a value, entered on the SRS, will specify the port one size in inches.

Code 1706 and a value, entered on the SRS, will specify the port one size in millimetres.

Code 1708 and a letter, entered on the SRS, will specify the port one style from the applicable document entered with Code 1702.

Code 1710 and a port name, entered on the SRS, will specify the port one designation, such as pitot or static.

Code 1712 and a document designation, entered on the SRS, will specify the port two configuration shall be in accordance with the document.

Code 1714 and a value, entered on the SRS, will specify the port two size in inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 1716 and a value, entered on the SRS, will specify the port two size in millimetres.

Code 1718 and a letter, entered on the SRS, will specify the port two style from the applicable document entered with Code 1712.

Code 1720 and a port name, entered on the SRS, will specify the port two designation, such as pitot or static.

5.9.4 Minimum Zero Adjust From Initial Point

When zero adjust is required, minimum limits of adjustment at either the plus limit or minus limit or both the plus and minus limits can be specified.

The following codes and values, entered on the SRS, will specify the limits, in the units shown, as follows:

CODE	UNITS
1722	Minimum Plus Adjustment in Scale Divisions
1724	Minimum Plus Adjustment in Degrees of Arc
1726	Minimum Plus Adjustment in Degrees Celsius
1728	Minimum Plus Adjustment in Feet per Minute
1730	Minimum Plus Adjustment in Metres per Second
1732	Minimum Minus Adjustment in Scale Divisions
1734	Minimum Minus Adjustment in Degrees of Arc
1736	Minimum Minus Adjustment in Degrees Celsius
1738	Minimum Minus Adjustment in Feet per Minute
1740	Minimum Minus Adjustment in Metres per Second

Code 1742 and a value, entered on the SRS, will specify the maximum pointer movement, when adjusted, in degrees Celsius.

5.9.5 Hermetic Seal

Code 1750 and an “X”, entered on the SRS, will specify hermetic seal is required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

5.9.6 Case

Code 1752 and a document designation, entered on the SRS, will specify the document which identifies the case to be used as the indicator housing.

Code 1754 and a color, entered on the SRS, will specify the color of the indicator case.

Code 1755 and a color designation, entered on the SRS, will specify the color by the color designation from the document entered with Code 1756. Code 1756 is mandatory when Code 1755 is used.

Code 1756 and a document designation, entered on the SRS, will specify the document from which the color designation is specified.

5.9.7 Pointer

Code 1758 and a document designation(s), entered on the SRS, will specify the document which identifies the pointer(s) to be used on the indicator.

Code 1760 and a color(s), entered on the SRS, will specify the pointer color(s).

Code 1761 and a color designation(s), entered on the SRS, will specify the color(s) by the color designation(s) from the document entered with Code 1762: Code 1762 is mandatory when Code 1761 is used.

Code 1762 and a document designation, entered on the SRS, will specify the document from which the color designation is specified.

5.9.8 Cover Glass

Code 1764 and a document designation, entered on the SRS, will specify the document which identifies the cover glass to be used with the indicator.

Code 1766 and a document designation, entered on the SRS, will specify the document which identifies the cover glass coating.

Code 1768 and a value, entered on the SRS, will specify the maximum distance from the dial the cover glass shall be mounted in inches.

Code 1770 and a value, entered on the SRS, will specify the maximum distance from the dial the cover glass shall be mounted in millimetres.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

5.9.9 Parallax

Code 1772 and a value, entered on the SRS, will specify the maximum distance between pointer and dial in inches.

Code 1774 and a value, entered on the SRS, will specify the maximum distance between pointer and dial in millimetres.

5.9.10 Bearings

Code 1776 and a document designation, entered on the SRS, will specify the document which identifies the bearings to be used in the indicator.

5.9.11 Lubrication

Code 1778 and a document designation, entered on the SRS, will specify the document which identifies the lubricant to be used to lubricate the indicator.

5.9.12 Filling Media

Code 1779 and a value, entered on the SRS, will specify the minimum percent of helium in the filling media.

Code 1780 and a value, entered on the SRS, will specify the maximum percent of helium in the filling media.

Code 1782 and a document designation, entered on the SRS, will specify the document applicable to the helium to be used as the indicator fill media.

Code 1784 and a value, entered on the SRS, will specify the minimum percent of nitrogen in the filling media.

Code 1786 and a value, entered on the SRS, will specify the maximum percent of nitrogen In the filling media.

Code 1788 and a document designation, entered on the SRS, will specify the document applicable to the nitrogen to be used as the indicator fill media.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

5.9.13 Electrical Receptacle

Code 1790 and a document designation(s), entered on the SRS, will specify the document applicable to the electrical receptacle(s) to be used on the indicator.

Code 1792 and a Federal Supply Code(s) for Manufacturer, entered on the SRS, will specify the receptacle manufacturer(s).

Code 1794 and a part number(s), entered on the SRS, will specify the part number(s) of the receptacle(s). Code 1794 may also be used to further specify the connector(s) referenced with Code 1790.

5.9.14 Overload Protection

Code 1798 and an “x" , entered on the SRS, will specify overload pro-section is required.

5.9.15 Maximum Weight

Code 1800 and a value, entered on the SRS, will specify the maximum weight of the indicator in ounces.

Code 1802 and a value, entered on the SRS, will specify the maximum weight of the indicator in pounds. Do not use Code 1802 with Code 1800.

Code 1804 and a value, entered on the SRS, will specify the maximum weight of the indicator In grams.

Code 1806 and a value, entered on the SRS, will specify the maximum weight of the indicator In kilograms. Do not use Code 1806 with Code 1804.

5.9.16 Dial Marking

Dial marking may be specified by entering on the SRS, applicable codes from the Indicator Dial Marking Table, Table I in Section 8.

Code 1830 and a marking, entered on the SRS, will specify a dial mark-ing, nomenclature or detail to be placed on the Indicator dial.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 1831 and a value, entered on the SRS, will specify the value, in the units specified with Code 1832, of the height or length of the marking. Code 1832 is mandatory when Code 1831 is used.

Code 1832 and either inches or millimetres, entered on the SRS, will specify the unit of measure of the height or length of the marking. Table column space restrictions require abbreviations for units of measure be used. Inches shall be entered as in., millmetres as mm. Code 1832 applies to the value entered with Code 1831.

Code 1833 and a value, entered on the SRS, will specify the value, in the units specified with Code 1834, of the width of line or gradation of the marking. Code 1834 is mandatory when Code 1833 is used.

Code 1834 and either inches or millimetres, entered on the SRS, will specify the unit of measure of the width of line or graduation of the marking. Table column space restrictions require abbreviations for units of measure be used. Inches shall be entered as in., millimetres as mm. Code 1834 applies to the value entered with Code 1833.

Code 1835 and a color, material, or finish, entered on the SRS, will specify the color, material or finish of the marking.

The remaining lines may be entered on the SRS in a similar manner to specify the indicator dial markings.

When specifying tolerances for dial marking information specified using Table I it is mandatory to specify both the plus and minus values.

Codes 1810 and 1814 and values, entered on the SRS, will specify the plus and minus tolerance for the HEIGHT OR LENGTH colunn in inches, respectively.

Codes 1812 and 1816 and values, entered on the SRS, will specify the plus and minus tolerance for the HEIGHT OR LENGTH columns in millimetres, respectively.

Codes 1818 and 1822 and values, entered on the SRS, will specify the plus and minus tolerance for the WIDTH OF LINE OR GRADUATION columns in inches, respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Codes 1820 and 1824 and values, entered on the SRS, will specify the plus and minus tolerance for the WIDTH OF LINE OR GRADUATION columns in millimetres, respectively.

Code 1826 and a document designation, entered on the SRS, will specify the document to which the dial marking shall conform.

5.9.17 Indicator Input

Code 1900 and a type of input, entered on the SRS, will specify the type of indicator input such as synchro transmitter, tachometer generator or thermocouple. If Code 1900 is used, Code 1902 is mandatory.

Code 1902 and a document designation, entered on the SRS, will specify the document to which the type of Input shall conform.

5.9.18 Indicator Power

Code 1904 and a value, entered on the SRS, will specify the nominal ac voltage required for indicator power in volts ac.

Codes 1906 and 1908 and values, entered on the SRS, will specify the plus and minus ac voltage tolerance in volts ac, respectively.

Code 1910 and a value, entered on the SRS, will specify the nominal dc voltage required for indicator power in volts dc.

Code 1912 and 1914 and values, entered on the SRS, will specify the plus and minus dc voltage tolerance in volts dc, respectively.

Code 1916 and a value, entered on the SRS, will specify the ac voltage frequency in hertz.

Code 1918 and 1920 and values, entered on the SRS, will specify the plus and minus frequency tolerance in hertz, respectively.

5.9.19 Lighting Circuit Voltage

Code 1922 and a value, entered on the SRS, will specify the lighting circuit voltage in volts ac.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Codes 1924 and 1926 and values, entered on the SRS, will specify the plus and minus ac voltage tolerance in volts ac, respectively.

Code 1928 and a value, entered on the SRS, will specify the lighting circuit voltage in volts dc.

Code 1930 and 1932 and values, entered on the SRS, will specify the plus and minus dc voltage tolerance in volts dc, respectively.

5.10 Acceleration

Code 6249 is the 1006 test code (see 5.4).

Code 6250 is the 1006 except test code (see 5.4).

To detail an acceleration test, it is mandatory to use Codes 6252, 6275, and to specify a vehicle category with Code 6240, 6241, 6242, 6243, or 6244. Other codes are optional.

Code 6252 and an "X", entered on the SRS, will specify to test in accordance with Method 513 of MIL-STD-810.

Code 6275 and a value, entered on the SRS, will specify the A level in gravity units (g). The A level is the highest possible known or unknown forward acceleration of the vehicle in which the device is to be mounted. It is used to detenmine test levels of acceleration in accordance with the vehicle category and procedure(s) selected.

Code 6240, 6241, 6242, 6243 or 6244 and an "X", entered on the SRS, will specify the vehicle category. Only one category may be specified. Codes and categories are as follows:

6240	Airplane
6241	Helicopter
6242	Manned Aerospace Vehicle
6243	Air Launched Missile
6244	Ground Launched Missile

Code 6256 and a Roman numeral, entered on the SRS, will specify the procedure number when both procedures are not required. Procedure I is a nonoperating test, whereas the device under test is operated during Procedure II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 6259 and a value, entered on the SRS, will specify the time in minutes which the device under test shall be accelerated in each direction.

Code 6271 is the 1006 requirement code (see 5.4).

Code 6272 is the 1006 except requirement code (see 5.4).

To detail acceleration requirements, it is mandatory to use Code 6273. Other codes are optional.

Code 6273 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage after test.

Code 6276 and an "X", entered on the SRS, will specify there shall be no degradation of performance.

5.11 Cold Junction Compensator Lag

Code 2030 is the 1006 test code (see 5.4).

Code 2032 is the 1006 except test code (see 5.4).

To detail a cold junction compensator lag test, it is mandatory to use Code 2034. Other codes are optional.

Code 2034 and an "X" , entered on the SRS, will specify the test shall be performed in accordance with MIL-I-7884.

Code 2036 and a value, entered on the SRS, will specify the low test temperature in degrees Celsius.

Codes 2038 and 2040 and value(s), entered on the SRS, will specify the plus and minus low test temperature tolerance in degrees Celsius, respectively.

Code 2042 and a value, entered on the SRS, will specify the low temperature exposure duration in hours.

cc 2044 and a value, entered on the SRS, will specify the maximum rate of temperature decrease in degrees Celsius per minute.

Code 2046 and a value, entered on the SRS, will specify the high test temperature in degrees Celisus.

Codes 2048 and 2050 and value(s), entered on the SRS, will specify the plus and minus temperature tolerance in degrees Celsius, respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 2052 and a value, entered on the SRS, will specify the high temperature exposure duration in hours.

Code 2054 and a value, entered on the SRS, will specify the rate of temperature increase in degrees Celsius per minute.

Code 2060 is the 1006 requirement code (see 5.4).

Code 2062 is the 1006 except requirement code (see 5.4).

Code 2064 and a value, entered on the SRS, will specify the maximum variance from readings obtained at room temperature in degrees Celsius.

5.12 Current, Resistance Bulb

Code 2070 is the 1006 test code (see 5.4).

Code 2072 is the 1006 except test code (see 5.4).

To detail a resistance bulb current test, it is mandatory to use Code 2074. Other codes are optional.

Code 2074 and an "X", entered on the SRS, will specify the test shall be performed in accordance with MIL-I-81049.

Code 2076 and a value, entered on the SRS, will specify the test load in ohms.

Codes 2078 and 2080 and value(s), entered on the SRS, will specify the plus and minus load tolerance In ohms, respectively.

Code 2084 is the 1006 requirement code (see 5.4).

Code 2086 is the 1006 except requirement code (see 5.4).

Code 2088 and a value, entered on the SRS, will specify the maximum current in milliamperes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

5.13 Damping

Code 2100 is the 1006 test code (see 5.4).

Code 2102 is the 1006 except test code (see 5.4).

To detail a damping test, it is mandatory to use Code 2104. Other codes are optional.

Code 2104 and a document designation, entered on the SRS, will specify the document by which the test will be performed (see 5.7).

Codes 2106, 2108, 211O, 2112, and 2114 and value(s), entered on the SRS, will specify the applicable value at test points 1, 2, 3, 4, and 5 in pounds per hour, respectively. Test points must be specified in ascending order. Less than 5 test points can be specified.

Codes 2116, 2118, 2120, 2122, and 2124 and value(s), entered on the SRS, will specify the applicable value at test points 1, 2, 3, 4, and 5 in percent of full scale, respectively. Test points must be specified in ascending order. Less than 5 test points can be specified.

Codes 2126, 2128, and 2130 and value(s), entered on the SRS, will specify the applicable value at test points 1, 2, and 3 in degrees Celsius, respectively. Test points must be specified in ascending order. Less than 3 test points can be specified.

Codes 2132, 2134, and 2136 and value(s), entered on the SRS, will specify the applicable value at test points 1, 2, and 3 in pounds per square inch, respectively. Test points must be specified in ascending order. Less than 3 test points can be specified.

Codes 2138, 2140, and 2142 and value(s), entered on the SRS, will specify the applicable value at test points 1, 2, and 3 in kilopascals, respectively. Test points must be specified in ascending order. Less than 3 test points can be specified.

Codes 2144, 2146, and 2148 and value(s), entered on the SRS, will specify the applicable value at test points 1, 2, and 3 in knots, respectively. Test points must be specified in ascending order. Less than 3 test points can be specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Codes 2150, 2152, and 2154 and value(s), entered on the SRS, will specify the applicable value at test points 1, 2, and 3 in metres per second, respectively. Test points must be specified in ascending order. Less than 3 test points can be specified.

Codes 2156, 2158, and 2160 and value(s), entered on the SRS, will specify the applicable value at test points 1, 2, and 3 in cubic metres per hour, respectively. Test points must be specified in ascending order. Less than 3 test points can be specified.

Code 2162 and a value, entered on the SRS, will specify the maximum double amplitude pointer movement in percent of full scale.

Code 2164 and a value, entered in the SRS, will specify the input frequency in hertz.

Code 2170 is the 1006 requirement code (see 5.4).

Code 2172 is the 1006 except requirement code (see 5.4).

Code 2174 and a value, entered on the SRS, will specify the time required for the pointer to reach the test point in seconds.

Codes 2176 and 2178, and value(s), entered on the SRS, will specify the plus and minus time tolerance in seconds, respectively.

Code 2180 and a value, entered on the SRS, will specify the minimum damping factor.

Code 2182 and a value, entered on the SRS, will specify the maximum damping factor.

5.14 DC Resistance

Code 2200 is the 1006 test code (see 5.4).

Code 2202 is the 1006 except test code (see 5.4).

To detail a dc resistance test, it is mandatory to use Code 2204. Other codes are optional.

Code 2204 and an “X”, entered on the SRS, will specify the test shall be performed in accordance with MIL-STD-202, Method 303.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 2206 and a value, entered on the SRS, will specify the limit of error of measuring apparatus, if other than one-tenth of specified tolerance, in percent.

Code 2208 and a value, entered on the SRS, will specify the test voltage in volts dc.

Code 2210 and a value, entered on the SRS, will specify the maximum period of uninterrupted test voltage application, if other than 5 seconds, in seconds.

Code 2212 is the 1006 requirement code (see 5.4).

Code 2214 is the 1006 except requirement code (see 5.4).

Code 2216 and a value, entered on the SRS, will specify the maximum resistance in ohms.

Code 2218 and a value, entered on the SRS, will specify the maximum resistance in milliohms. Do not use Code 2218 with Code 2216.

5.15 Dead Spot

Code 2220 is the 1006 test code (see 5.4).

Code 2222 is the 1006 except test code (see 5.4).

Code 2224 and an "X", entered on the SRS, will specify the test shall be performed in accordance with MIL-I-25645.

Code 2230 is the 1006 requirement code (see 5.4).

Code 2232 is the 1006 except requirement code (see 5.4).

Code 2234 and a value, entered on the SRS, will specify the maximum computed percent of full scale indication in percent. The capacitance values required to produce indicator pointer movement shall be noted and computed as a percentage of the full scale indication for which the indicator is calibrated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

5.16 Dielectric Withstanding Voltage at Reduced Barometric Pressure

Code 4883 is the 1006 test code (see 5.4).

Code 4884 is the 1006 except test code (see 5.4).

To detail a dielectric withstanding voltage test at reduced barometric pressure, Codes 6300 and 4886, and either Code 4849 or 4885, are mandatory. Other codes are optional. Information concerning them is as follows:

Code 6300 and an "X", entered on the SRS, will specify the dielectric withstanding voltage test in accordance with Method 301 of MIL-STD-202 shall be performed at reduced barometric pressure.

Code 4886 and a letter, entered on the SRS, will specify the altitude shall be as specified by test condition letter from Method 105 of MIL-STD-202.

Code 4885 and a value, entered on the SRS, will specify dc test voltage. Do not use Code 4885 with Code 4849.

Code 4849 and a value, entered on the SRS, will specify ac test voltage. Do not use Code 4849 with Code 4885.

Code 6311 and an "X", entered on the SRS, will specify the test voltage shall be applied between terminations tied together and mounting hardware.

Code 6312 and an "X", entered on the SRS, will specify the test voltage shall be applied between terminations tied together and case.

Code 6292 and an "X", entered on the SRS, will specify that the dielectric withstanding voltage shall be applied between mutually insulated parts.

Code 6293 and an "X", entered on the SRS, will specify that the dielectric withstanding voltage shall be applied between all insulated parts and ground.

Code 6294 and an "X", entered on the SRS, will specify that the dielectric withstanding voltage shall be applied between the current carrying parts and case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 4891 and a value, entered on the SRS, will specify duration in seconds of voltage application. This code is used only if duration required is other than 60 seconds.

Code 6308 and a value, entered on the SRS, will specify the required regulation of the test voltage in percent.

Code 4900 and a value, entered on the SRS, will specify the minimum kilovolt-ampere rating of the voltage source in kilovolt-amperes.

Code 4902 and a value, entered on the SRS, will specify the maximum surge current in amperes. Do not use Code 4902 with Code 6310.

Code 6310 and a value, entered on the SRS, will specify the maximum surge current in milliamperes. Do not use Code 6310 with Code 4902.

Code 4907 is the 1006 requirement code (see 5.4).

Code 4908 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 4906 is mandatory and others are optional. Information concerning them is as follows:

Code 4906 and an "X", entered on the SRS, will specify there shall be no evidence of flashover, mechanical damage, arcing, or insulation breakdown after test.

Code 4894 and a value, entered on the SRS, will specify maximum leakage current in milliamperes.

Code 4901 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance after test.

5.17 Dielectric Withstanding Voltage at Sea Level

Code 4860 is the 1006 test code (see 5.4).

Code 4861 is the 1006 except test code (see 5.4).

To detail a test method for dielectric withstanding voltage test at sea level, Code 4862 and either Code 4854 or 4855 are mandatory. Other codes are optional. Information concerning them is as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 4862 and an "X", entered on the SRS, will specify to test in accordance with Method 301 of MIL-STD-202.

Code 4854 and a value, entered on the SRS, will specify test dc voltage. Do not use Code 4854 with Code 4855.

Code 4855 and a value, entered on the SRS, will specify test ac voltage. Do not use Code 4855 with Code 4854.

Code 4842 and an "X", entered on the SRS, will specify test voltage shall be applied between terminations tied together and mounting hardware.

Code 4848 and an "X", entered on the SRS, will specify test voltage shall be applied between terminations tied together and case.

Code 4844 and an "X", entered on the SRS, will specify that *the* dielectric withstanding voltage shall be applied between mutually insulated parts.

Code 4845 and an "X", entered on the SRS, will specify that the dielectric withstanding voltage shall be applied between all insulated parts and ground.

Code 4846 and an "X", entered on the SRS, will specify that the dielectric withstanding voltage shall be applied between current carrying parts and the case.

Code 4867 and a value, entered on the SRS, will specify duration in seconds of voltage application. This code is used only if duration required is other than 60 seconds.

Code 4869 and a value, entered on the SRS, will specify the required regulation of the test voltage in percent.

Code 4870 and a value, entered on the SRS, will specify the minimum kilovolt-ampere rating of the voltage source in kilovolt-amperes. .

Code 4717 and a value, entered on the SRS, will specify the maximum surge current in amperes. Do not use Code 4717 with Code 4897.

Code 4897 and a value, entered on the SRS, will specify the maximum surge current in milliamperes. Do not use Code 4897 with Code 4717.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 4873 is the 1006 requirement code (see 5.4).

Code 4874 is the 1006 except requirement code (see 5.4).

To detail requirements for the dielectric withstanding voltage test at sea level, Code 4856 is mandatory; other codes are optional. Information concerning them is as follows:

Code 4856 and an "X", entered on the SRS, will specify there shall be no evidence of flashover, mechanical damage, arcing, or insulation breakdown after test.

Code 4875 and a value, entered on the SRS, will specify maximum leakage current in milliamperes.

Code 4847 and an "X" entered on the SRS, will specify the device shall remain within specified tolerance after test.

5.18 Dust

Code 4876 is the 1006 test code (see 5.4).

Code 4895 is the 1006 except test code (see 5.4).

To detail a dust test, it is mandatory to use Code 4953. Other codes are optional.

Code 4953 and an "X", entered on the SRS, will specify to test in accordance with Method 510 of MIL-STD-810.

Code 4872 and a number (1 or 3, or both), entered on the SRS, will specify that during the test, the test specimen shall be operating during steps 1 or 3, or both. Code 6299 is mandatory if Code 4872 is used.

Code 6299 and a value, entered on the SRS, will specify the duration of operation in hours in each specified step.

Code 1539 and an "X", entered on the SRS, will specify the specimen orientation shall be change during the test.

Code 4956 and an "X", entered on the SRS, will specify a second 6-hour test shall be required immediately following temperature stabilization in step 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 4840 and a value, entered on the SRS, will specify the chamber temperature in degrees Celsius in steps 2 and 3 when a temperature other than 63 degrees Celsius is required.

Code 4702 is the 1006 requirement code (see 5.4).

Code 4724 is the 1006 except requirement code (see 5.4).

Code 1510 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage. This code is mandatory when requirements are detailed.

Code 4801 and an "X", entered on the SRS, will specify there shall be no evidence of dust penetration.

5.19 Effect of Lead Length

Code 2240 is the 1006 test code (see 5.4).

Code 2242 is the 1006 except test code (see 5.4).

To detail an effect of lead length test, it is mandatory to use Code 2244. Other codes are optional.

Code 2244 and a document designation, entered on the SRS, will specify the document by which the test shall be performed (see 5.7).

Code 2246 and a value, entered on the SRS, will specify the initial lead length in feet.

Code 2248 and a value, entered on the SRS, will specify the initial lead length in metres.

Code 2250 and a value, entered on the SRS, will specify the test lead length in feet.

Code 2252 and a value, entered on the SRS, will specify the test lead length in metres.

Code 2254 and a value, entered on the SRS, will specify the awg wire size.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 2256 and a value, entered on the SRS, will specify the lead diameter in millimetres.

Code 2258 and a value, entered,on the SRS, will specify the initial lead resistance in ohms.

Code 2260 and a value, entered on the SRS, will specify the test lead resistance in ohms.

Code 2262 is the 1006 requirement code (see 5.4).

Code 2264 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 2265 is mandatory.

Code 2265 and an “X”, entered on the SRS, will specify that requirements are detailed as follows.

Code 2266 and a value, entered on the SRS, will specify the maximum change in indication in degrees of arc.

Code 2268 and a value, entered on the SRS, will specify the maximum change in indication in degrees Celsius.

Code 2270 and a value, entered on the SRS, will specify there shall be no change in specified scale errors.

5.20 Electromagnetic Interference

Code 1950 is the 1006 test code (see 5.4).

Code 1952 is the 1006 except test code (see 5.4).

To detail an electromagnetic interference test, it is mandatory to use Code 1953 and at least one code selected from Codes 1954, 1955, 1956, 1958, 1960, 1962, or 1964. More than one code may be used if required.

Code 1954 and a designation(s), entered on the SRS, will specify the applicable method(s) per the MIL-STD-461 Appendix. Enter the complete method designation (e.g., A-CE1). If more than one method per MIL-STD-461 is required, separate the designations by the word “and” with appropriate spaces.

Code 1955 and an “X”, entered on the SRS, will specify testing shall be perfomed in accordance with MIL-STD-462.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 1956 and a number, entered on the SRS, will specify to test in accordance with MIL-STD-462 and the applicable conducted emission (CE) test method number. Only the number (e. g., 01) is entered with Code 1956.

Code 1958 and a number, entered on the SRS, will specify to test in accordance with MIL-STD-462 and the appliable radiated emission (RE) test method number. Only the number (e.g.. 01) is entered with Code 1958.

Code 1960 and a number, entered on the SRS, will specify to test in accordance with MIL-STD-462 and the applicable conducted susceptibility (CS) test method number. Only the number (e. g., 01) is entered with Code 1960.

Code 1962 and a number, entered on the SRS, will specify to test in accordance with MIL-STD-462 and the applicable radiated susceptibility (RS) test method number. Only the number (e.g. 01) is entered with Code 1962.

Code 1964 and a number, entered on the SRS, will specify to test in accordance with MIL-STD-462 and the applicable conducted, radiated emission (CRE) test method number. Only the number (e.g, 01) is entered with Code 1964. These methods are for testing in high ambient conditions.

Code 1970 is the 1006 requirement code (see 5.4).

Code 1972 is the 1006 except requirement code (see 5.4).

Code 1974 and an “X”, entered on the SRS, will specify that the requirements shall be in accordance with the MIL-STD-461 for the test method(s) specified.

5.21 Endurance

Code 2300 is the 1006 test code (see 5.4).

Code 2302 is the 1006 except test code (see 5.4).

To detail an endurance test, it is mandatory to use Code 2304. Other codes are optional.

Code 2304 and a document designation, entered on the SRS, will Specify the documents by which the test shall be performed (see 5.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 2306 and a value, entered on the SRS, will specify the test duration in hours.

Code 2308 and a value, entered on the SRS, will specify the number of test cycles.

Code 2310 and a value, entered on the SRS, will specify the test cycle rate in cycles per minute.

Code 2307 and a value, entered on the SRS, will specify the pointer test point in percent of full scale deflection.

Code 2309 and a value, entered on the SRS, will specify the maximum pointer oscillation at a test point in plus and minus scale divisions.

Code 2312 is the 1006 requirement code (see 5.4).

Code 2314 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 2315 is mandatory.

Code 2315 and an "X", entered on the SRS, will specify that requirements are detailed as follows.

Code 2316 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage.

Code 2318 and a value, entered on the SRS, will specify the maximum change in readings in percent.

Code 2320 and an "X", entered on the SRS, will specify the indicator shall remain within specified tolerance(s).

5.22 Error, Friction

Code 2330 is the 1006 test code (see 5.4).

Code 2332 is the 1006 except test code (see 5.4).

To detail a friction error test, it is mandatory to use Code 2334. Other codes are optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 2334 and a document designation, entered on the SRS, will specify the document by which the test shall be performed (see 5.7).

To add or change test points from the test points in the document specified with Code 2334, the Friction Error Table. Table II In Section 8, is used. The test point value(s) is specified with code(s) from Column 1. The unit of measure for column 1 must be specified when the test points are detailed. Requirements are specified with codes from columns 2 through 4. The unit of measure for the requirements column must also be specified when codes from the table are used to detail requirements. When columns 3 and 4 are used, the applicable low and high temperatures may be specified.

Codes frcm column 1, TEST POINTS, with an applicable unit of measure code will specify the test points from which the friction errors shall be detemined. It is mandatory to enter Code 2366 from column 1 on the SRS if test point(s) are to be detailed.

Code 2366 and a value, entered on the SRS, will specify the first test point value. The remaining codes in the test points column may be specified in a similar manner. When column 1 codes *are* used, it is mandatory to specify a unit of measure.

One of the following codes with an ‘X”, entered on the SRS, will specify the unit of measure for the test point column. Only code may be used.

CODE	UNITS
2336	Scale divisions
2338	Percent of full scale
2340	Pounds per square inch
2342	Kilopascals
2344	Pounds per hour
2346	Kilograms per hour
2348	Degrees Celsius
2350	Feet per minute
2352	Metres per second
2354	Knots
2356	Mach number
2358	Litres
2360	Cubic metres
2362	Revolutions minute
2364	Percent of rated engine speed

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 2412 and a value, entered on the SRS, will specify the low test temperature in degrees Celsius.

Codes 2413 and 2418 and value(s), entered on the SRS, will specify the plus and minus temperature tolerance in degrees Celsius, respectively.

Code 2419 and a value, entered on the SRS, will specify the high test temperature in degrees Celsius.

Codes 2424 and 2425 and value(s), entered on the SRS, will specify the plus and minus temperature tolerance in degrees Celsius, respectively.

Code 2426 is the 1006 requirement code (see 5.4).

Code 2427 is the 1006 except requirement code (see 5.4).

To detail friction error requirements, it is mandatory to use Code 2428. Other codes are optional.

Code 2428 and an "X", entered on the SRS, will specify that requirements are detailed as follows.

Codes from Table II are entered as follows:

Code 2367 and a value, entered on the SRS, will specify the maximum friction error at room temperature.

Code 2368 and a value, entered on the SRS, will specify the maximum friction error, at the low temperature specified in the referenced document or with Code 2412, in the friction error unit of measure specified.

Code 2369 and a value, entered on the SRS, will specify the maximum friction error, at the high temperature specified in the referenced document or with Code 2419, in the friction error unit of measure specified.

The remaining lines may be entered on the SRS in a similar manner. to specify additional friction errors. When friction errors are specified, it is mandatory to specify unit of measure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

One *of* the following codes with an "X", entered on the SRS, will specify the maximum friction error unit of measure to be used with the Frction Error Table, Table II in Section 8. The unit of measure is applicable to the requirements columns, columns 2, 3, and 4. Only one code may be used.

CODE	UNITS
2370	Scale divisions
2371	Pounds per square inch
2376	Kilopascals
2377	Pounds per hour
2382	Kilograms per hour
2383	Degrees Celsius
2388	Feet per minute
2389	Metres per second
2394	Knots
2395	Mach number
2400	Litres
2401	Cubic metres
2406	Revolutions per minute
2407	Percent of rated engine speed

5.23 Error, Pointer Zero Position

Code 2510 is the 1006 test code (see 5.4).

Code 2512 is the 1006 except test code (see 5.4).

To detail a pointer zero position error test, it is mandatory to use Code 2514.

Code 2514 and an "X", entered on the SRS, will specify there shall be no applied input.

Code 2520 is the 1006 requirement code (see 5.4).

Code 2522 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 2523 is mandatory.

Code 2523 and an "X", entered on the SRS, will specify that requirements are detailed as follows.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Codes 2524 and 2526 and value(s), entered on the SRS, will specify the maximum pointer error from the zero position in plus and minus knots, respectively.

Codes 2528 and 2529 and value(s), entered on the SRS, will specify the maximum pointer error from the zero position in plus and minus scale divisions, respectively.

5.24 Error, Position

Code 2440 is the 1006 test code (see 5.4).

Code 2422 is the 1006 except test code (see 5.4).

To detail a position error test, it is mandatory to use Code 2444. Other codes are optional.

Code 2444 and a document designation, entered on the SRS, will specify the document by which the test shall be performed (see 5.7).

When a test point(s) is required, Codes 2480 through 2489 may be used as applicable. If the test points specified in the document referenced with Code 2444 are appropriate, it is not necessary to specify any test points.

Codes 2480 through 2489, and a value(s), entered on the SRS, will specify the first test point through the tenth test point values, respectively. All test points need not be specified but when used the test points shall be specified in ascending order.

One of the following codes with an "X", entered on the SRS, will specify the maximum position error unit of measure. Only one code may be used. A position error unit of measure is mandatory when a position error code(s) is used.

CODE	UNITS
2446	Scale divisions
2448	Percent of full scale
2450	Pounds per square inch
2452	Kilopascals
2454	Pounds per hour
2456	Kilograms per hour

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CODE	UNITS (Cont)
2458	Degrees Celsius
2460	Feet per minute
2462	Metres per second
2464	Knots
2466	Mach number
2468	Litres
2470	Cubic metres
2472	Revolutions per minute
2474	Percent of rated engine speed

Code 2500 is the 1006 requirement code (see 5.4).

Code 2502 is the 1006 except requirement code (see 5.4).

Codes 2490, 2492, 2494, 2496, and 2498 are available for specifying the maximum plus and minus position errors. It is necessary to specify only the number of different values required. When a position error code and value are entered on the SRS, it is mandatory to specify test points at which the value is appropriate, e.g. first, second, third, fourth. The term “All” shall be entered with code 2491 if the position error value is applicable to all test points. It is also mandatory to specify the position error unit of measure.

Code 2490 and a value, entered on the SRS, will specify a maximum plus and minus position error.

Code 2491 and a designation(s), entered on the SRS, will specify the appropriate test points at which the position error value designation with Code 2490 is applicable. The designation shall be entered on the SRS as first, second, third, as determined from the document referenced with Code 1006 or test points as specified herein.

Code 2492 and a value, entered on the SRS, will specify a maximum plus and minus position error.

Code 2493 and a designation(s), entered on the SRS, will specify the appropriate test points at which the position error value designated with Code 2492 is applicable. The designation shall be entered on the SRS as first, second, third, as determined from the document referenced with Code 1006 or test points as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 2494 and a value, entered on the SRS, will specify a maximum plus and minus position error.

Code 2495 and a designation(s), entered on the SRS, will specify the appropriate test points at which the position error value designated with Code 2494 is applicable. The designation shall be entered on the SRS as first, second, third, as determined from the document referenced with Code 1006 or test points as specified herein.

Code 2496 and a value, entered on the SRS, will specify a maximum plus and minus position error.

Code 2497 and a designation(s), entered on the SRS, will specify the appropriate test points at which the position error value designated with Code 2496 is applicable. The designation shall be entered on the SRS as first, second, third, as determined from the document referenced with Code 1006 or test points as specified herein.

Code 2498 and a value, entered on the SRS, will specify a maximum plus and minus position error.

Code 2499 and a designation(s), entered on the SRS, will specify the appropriate test points at which the position error value designated with Code 2498 is applicable. The designation shall be entered on the SRS as first, second, third as determined from the document referenced with Code 1006 or test points as specified herein.

One of the following codes with an “X”, entered on the SRS, will specify the position error test point unit of measure. Only one code may be used. A test point unit of measure code is mandatory when a test point(s) is specified.

CODE	UNITS
2445	Scale divisions
2447	Pounds per square inch
2449	Kilopascals
2451	Pounds per hour
2453	Kilograms per hour
2455	Degrees Celsius
2457	Feet per minute
2459	Metres per second
2461	Knots
2463	Mach number
2465	Litres
2467	Cubic metres
2469	Revolutions per minute
2471	Percent of rated engine

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

5.25 Error, Scale

Code 2550 is the 1006 test code (see 5.4).

Code 2552 is the 1006 except test code (see 5.4).

To detail a Scale Error test, it is mandatory to use Code 2554. Other codes are optional.

Code 2554 and a document designation, entered on the SRS, will Specify the document by which the test shall be performed (see 5.7).

To add or change test inputs and test points from the test input and test points In the document specified with Code 2554, the Scale Error Table, Table III in Section 8, is used. The test input value is specified with code(s) from column 1. The unit of measure for column 1 must be specified when the test inputs are detailed. The test point or required indication value is specified with code(s) from column 2. The unit of measure for column 2 must be specified when test points or required indications are specified. Requirements are specified with codes from column 3 through 10. The unit of measure for the requirement columns must also be specified when codes from the table are used to detail requirements. When columns 9 and 10 are used, the applicable low and high temperatures may be specified.

Code 2641 from column 1 and a value, entered on the SRS, with a test input unit of measure, will specify a test input. Additional codes from column 1 will specify additional test inputs required to produce the required indication(s) specified in column 2. Column 1 is not mandatory.

One of the following codes with an "X", entered on the SRS, will specify the column 1 test input unit of measure. The unit of measure is mandatory when a test input code(s) from column 1 is used.

CODE	UNITS
2586	Volts ac
2588	Volts dc
2590	Pounds per square inch
2592	Kilopascals
2594	Pounds per square inch differential
2596	Kilopascals differential
2598	Revolutions per minute
2602	Input resistance in ohms

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 2642 from column 2 and a value, entered on the SRS, with a test point unit of measure, will specify a test point or required indication. Additional codes from column 2 will specify additional test points or required indications from which scale errors shall be determined. Code 2642 is mandatory when test points or required indications are required.

One of the following codes with an "X", entered on the SRS, will specify the column 2 test point or required indication unit of measure. The unit of measure is mandatory when a test point or required indication code(s) from column 2 is used.

CODE	UNITS
2556	Scale divisions
2558	Percent of full scale
2560	Pounds per square inch
2562	Kilopascals
2564	Pounds per hour
2566	Kilograms per hour
2568	Degrees Celsius
2570	Feet per minute
2572	Metres per second
2574	Knots
2576	Mach number
2578	Litres
2580	Cubic metres
2582	Revolutions per minute
2584	Percent of rated engine

Code 2616 and a value, entered on the SRS, will specify the -54 degree Celsius temperature exposure duration in hours.

Code 2618 and a value, entered on the SRS, will specify the -35 degree Celsius temperature exposure duration in hours.

Code 2620 and a value, entered on the SRS, will specify the -5 degree Celsius temperature exposure duration in hours.

Code 2622 and a value, entered on the SRS, will specify the O degree Celsius temperature exposure duration in hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 2624 and a value, entered on the SRS, will specify the 71 degree Celsius temperature exposure duration in hours.

Code 2626 and a value, entered on the SRS, will specify the high temperature exposure duration in hours.

Code 2628 and a value, entered on the SRS, will specify the low temperature exposure duration in hours.

Code 2630 and a value, entered on the SRS, will specify the high test temperature in degrees Celsius applicable to column 10 requirements.

Code 2632 and a value, entered on the SRS, will specify the low test temperature in degrees Celsius applicable to column 9 requirements.

Codes 2633 and 2635 and a value(s), entered on the SRS, will specify to plus and minus high test temperature tolerance in degrees Celsius, respectively.

Codes 2634 and 2636 and values, entered on the SRS, will specify the plus and minus low test temperature tolerance in degrees Celsius, respectively.

Code 2638 is the 1006 requirement code (see 5.4).

Code 2640 is the 1006 except requirement code (see 5.4).

To detail scale error requirements, it is mandatory to use Code 2639. Other codes are optional.

Code 2639 and an “X”, entered on the SRS, will specify that requirements are detailed as follows.

The scale error requirements may be specified by entering on the SRS applicable codes from the Scale Error Table, Table III in Section 8, columns 3 through 10, and an applicable unit of measure.

Code 2643 from column 3 and a value, entered on the SRS, will specify the maximum scale error at room temperature.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 2644 from column 4 and a value, entered on the SRS, will specify the maximum scale error at -54 degrees Celsius.

Code 2645 from column 5 and a value, entered on the SRS, will specify the maximum scale error at -35 degrees Celsius.

Code 2646 from column 6 and a value, entered on the SRS, will specify the maximum scale error at -5 degrees Celsius.

Code 2647 from column 7 and a value, entered on the SRS, will specify the maximum scale error at O degrees Celsius.

Code 2648 from column 8 and a value, entered on the SRS, will specify the maximum scale error at + 71 degrees Celsius.

Code 2649 from column 9 and a value, entered on the SRS, will specify the maximum scale error at the low temperature specified in the test parameters.

Code 2650 from column 10 and a value, entered on the SRS, will specify the maximum scale error at the high temperature specified in the test parameters.

The remaining lines may be entered on the SRS in a similar manner to specify additional scale errors for added test points.

One of the following codes with an “X”, entered on the SRS, will specify the scale error unit of measure. The unit of measure is mandatory when any code in columns 3 through 10 is used.

CODE	UNITS
2557	Scale divisions
2559	Pounds per square inch
2561	Kilopascals
2563	Pounds per hour
2565	Kilograms per hour
2567	Degrees Celsius
2569	Feet per minute
2571	Metres per second
2573	Knots
2575	Mach number
2577	Litres
2579	Cubic metres
2581	Revolutions per minute
2583	Percent of rated engine speed

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

5.26 Fogging

Code 3000 is the 1006 test code (see 5.4).

Code 3002 is the 1006 except test code (see 5.4).

To detail a fogging test, it is mandatory to use Code 3004. Other codes are optional.

Code 3004 and a document designation, entered on the SRS, will specify the document by which the test shall be performed (see 5.7).

Code 3006 and a value, entered on the SRS, will specify the test temperature in degrees Celsius.

Code 3008 and a value, entered on the SRS, will specify the minimum duration at test temperature in hours.

Code 3010 is the 1006 requirement code (see 5.4).

Code 3012 is the 1006 except requirement code (see 5.4).

Code 3014 and an “X”, entered on the SRS, will specify there shall be no evidence of fogging.

5.27 Frequency Cycling

Code 3020 is the 1006 test code (see 5.4).

Code 3022 is the 1006 except test code (see 5.4).

To detail a frequency cycling test, it is mandatory to use Code 3024. Other codes are optional.

Code 3024 and a document designation, entered on the SRS, will specify the document by which the test shall be performed (see 5.7).

Code 3028 and a value, entered on the SRS, will specify the initial test voltage in volts ac.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Codes 3030 and 3032 and value(s), entered on the SRS, will specify the plus and minus ac test voltage tolerance in volts ac, respectively.

Codes 3036 and 3038 and value(s), entered on the SRS, will specify the minimum and maximum frequencies in hertz, respectively, of the test frequency range.

Code 3040 and a value, entered on the SRS, will specify the initial frequency increase duration in seconds.

Code 3042 and a value, entered on the SRS, will specify the intial frequency decrease duration in seconds.

Code 3044 and a value, entered on the SRS, will specify the second frequency Increase duration in seconds.

Code 3046 and a value, entered on the SRS, will specify the second frequency decrease duration in seconds.

Code 3048 and a value, entered on the SRS, will specify the test duration in hours.

Code 3050 and a value, entered on the SRS, will specify the test cycle rate in cycles per hour.

Code 3052 and a value, entered on the SRS, will specify the power removal duration in hours.

Code 3054 and a value, entered on the SRS, will specify the reapplied test voltage in volts ac.

Codes 3056 and 3058 and value(s), entered on the SRS, will specify the plus and minus test voltage tolerance, respectively, in volts ac.

Codes 3060 and a value, entered on the SRS, will specify the reapplied test voltage duration in hours.

Code 3062 and a value, entered on the SRS, will specify the second test cycle duration in hours.

Codes 3064 and 3066, and value(s), entered on the SRS, will specify the minimum and maximum frequency in hertz, respectively, of the second test cycle frequency range.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 3070 is the 1006 requirement code (see 5.4).

Code 3072 is the 1006 except requirement code (see 5.4).

Code 3074 and an "X", entered on the SRS, will specify the indicator shall remain within scale error at room temperature requirements.

5.28 Fungus

Code 4753 is the 1006 test code (see 5.4).

Code 4754 is the 1006 except test code (see 5.4).

To detail a fungus test, Code 4755 is mandatory. Code 4756 is optional.

Code 4755 and an "X", entered on the SRS, specifies to test in accordance with Method 508 of MIL-STD-810.

Code 4756 and a value, entered on the SRS, will specify duration of test in days (if other than 28 days).

Code 4759 is the 1006 requirement code (see 5.4).

Code 4760 is the 1006 except requirement code (see 5.4).

Code 4761 and an "X", entered on the SRS, will specify all external materials shall be nonnutrient to fungus growth or shall be suitably treated to retard fungus growth. The manufacturer shall verify by certification that all external materials are fungus resistant or shall perform the fungus test as specified. When the fungus test is performed, there shall be no evidence of fungus growth on the external surfaces. Do not use Code 4761 with Code 4762.

Code 4762 and an "X", entered on the SRS, will specify all external materials shall be nonnutrient to fungus growth or shall be suitably treated to retard fungus growth. When the fungus test specified is performed, there shall be no evidence of fungus growth to the external surfaces. Do not use Code 4762 with Code 4761.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

5.29 Helium Test

Code 3080 is the 1006 test code (see 5.4).

Code 3082 is the 1006 except test code (see 5.4).

To detail a helium test, it is mandatory to use Code 3084.

Code 3084 and a document designation, entered on the SRS, will specify the document by which the test shall be performed (see 5.7).

Code 3086 is the 1006 requirement code (see 5.4).

Code 3088 is the 1006 except requirement code (see 5.4).

Code 3090 and an “X”, entered on the SRS, will specify that helium detection is required.

5.30 Humidity

Code 4787 is the 1006 test code (see 5.4).

Code 4788 is the 1006 except test code (see 5.4).

To detail a humidity test, it is mandatory to use codes 4871 and one of the following: 4767, 6334, 6335, 6336 or 6337. Other codes are optional.

Code 4871 and an “X”, entered on the SRS, will specify to test in accordance with Method 507 of MIL-STD-810.

Code 4767 and a Roman numeral I, entered on the SRS, will specify test procedure I from Method 507 of MIL-STD-810 shall apply.

When test procedure I is specified with Code 4767, the following codes by be used to specify conditioning at high temperature before the humidity test.

Code 4777 and a value, entered on the SRS, will specify the temperature n degrees Celsius at which the device shall be conditioned. If Code 4777 s used, Code 4778 is mandatory.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 4778 and a value, entered on the SRS, will specify the duration in hours of the conditioning period.

Code 6334 and a Roman numeral II, entered on the SRS, will specify test procedure II from Method 507 of MIL-STD-810 shall apply.

When test procedure II is specified with Code 6334, the cycle time may be limited to 24 hours duration as follows:

Code 4716 and an “X", entered on the SRS, will specify that cycle duration shall be limited to 24 hours.

Code 6335 and a Roman Numeral III, entered on the SRS, will specify test procedure III from Method 507 of MIL-STD-810 shall apply.

Code 6336 and a Roman Numeral IV, entered on the SRS, will specify test procedure IV from Method 507 of MIL-STD-810 shall apply.

Code 6337 and a Roman Numeral V, entered on the SRS, will specify test procedure V from Method 507 of MIL-STD-810 shall apply.

When test procedure V is specified with Code 6337, the total number of cycles may be change as follows:

Code 4800 and a number, entered on the SRS, will specify the number of temperature cycles, if other than 20, to which the device shall be subjected at 90 to 95 percent humidity.

Code 4764 and an “X”, entered on the SRS, will specify that water purity shall be determined by the conductivity method.

Code 4916 and a number(s), entered on the SRS, will specify that operation and measurements shall be performed during the high temperature portion of the cycle number(s) entered.

Code 4919 and a number(s), entered on the SRS, will specify that insulation resistance shall be measured during the high temperature portion of the cycle number(s) entered.

Code 4920 and a number(s), entered on the SRS, will specify that the dielectric withstanding voltage test shall be performed during the high temperature portion of the cycle number(s) entered.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 1554 and a number(s), entered on the SRS, will specify that operation and measurements shall be performed during the low temperature portion of the cycle number(s) entered.

Code 1555 and a number(s), entered on the SRS, will specify that insulation resistance shall remeasured during the low temperature portion of the cycle number(s) entered.

Code 1556 and a number(s), entered on the SRS, will specify that the dielectric withstanding voltage test shalt be performed during the low temperature portion of the cycle number(s) entered.

Code 4797 is the 1006 requirement code (see 5.4).

Code 4798 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 4799 is mandatory. Other codes are optional.

Code 4799 and an “X”, entered on the SRS, will specify there shall be no evidence of corrosion or physical damage.

Code 4815 and an “X”, entered on the SRS, will specify there shall be no degradation of performance.

Code 4791 and an "X”, entered on the SRS, will specify the device shall remain within specified tolerance.

Code 1477 and an “X”, entered on the SRS, will specify there shall be no evidence of flashover, arcing, or insulation breakdown when the dielectric withstanding voltage test at sea level is performed.

Code 4795 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms when measured at high humidity.

Code 4805 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms when measured after drying.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 4813 and a value, entered on the SRS, will specify the maximum leakage current in milliamperes when dielectric withstanding voltage test at sea level is performed at high humidity.

Code 4803 and a value, entered on the SRS, will specify the maximum leakage current in milliamps when dielectric withstanding voltage test at sea level is performed after drying.

5.31 Hysteresis

Code 3100 is the 1006 test code (see 5.4).

Code 3102 is the 1006 except test code (see 5.4).

To detail a hysteresis test, it is mandatory to use Code 3104. Other codes are optional.

Code 3104 and an "X", entered on the SRS, will specify the test shall be performed in accordance with MIL-I-83026.

Codes 3106, 3108, 3110, and 3112 and value(s), entered on the SRS, will specify test points 1, 2, 3, and 4 in pounds per hour, respectively. Test points must be specified in ascending order. Less than 4 test points may be specified.

Codes 3114, 3116, 3118, and 3120 and value(s), entered on the SRS will specify test points 1, 2, 3, and 4 in kilograms per hour, respectively. Test points must be specified in ascending order. Less than 4 test points may be specified.

Codes 3113, 3115, 3117, and 3119 and value(s), entered on the SRS, will specify test points 1, 2, 3, and 4 in percent of full scale, respectively. Test points must be specified in ascending order. Less than 4 test points may be specified.

Code 3122 is the 1006 requirement code (see 5.4).

Code 3124 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 3125 is mandatory.

Code 3125 and an "X", entered on the SRS, will specify that requirements are detailed as follows.

Code 3126 and a value, entered on the SRS, will specify the reference point from which the error shall be specified in pounds per hour.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 3128 and a value, entered on the SRS, will specify the reference point from which the error shall be specified in kilograms per hour.

Code 3129 and a value, entered on the SRS, will specify the reference point from which the error shall be specified in scale divisions.

Code 3130 and a value, entered on the SRS, will specify the maximum error below the reference point in pounds per hour.

Code 3132 and a value, entered on the SRS, will specify the maximum error below the reference point in kilograms per hour.

Code 3133 and a value, entered on the SRS, will specify the maximum error below the reference point in scale divisions.

Code 3134 and a value, entered on the SRS, will specify the maximum error above reference point in pounds per hour.

Code 3136 and a value, entered on the SRS, will specify the maximum error above the reference point in kilograms per hour.

Code 3137 and a value, entered on the SRS, will specify the maximum error above the reference point in scale divisons.

5.32 Immersion

Code 4808 is the 1006 test code (see 5.4).

Code 4809 is the 1006 except test code (see 5.4).

To detail an immersion test, Codes 4810 and 4811 are mandatory. Other codes are optional.

Code 4810 and an “X”, entered on the SRS, will specify to test in cordance with Method 101 of MIL-STD-202.

Code 4811 and a letter, entered on the SRS, will specify the applicable test condition letter.

Code 4002 and a value, entered on the SRS, will specify the test media high temperature in degrees Celsius.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Codes 4004 and 4006 and values, entered on the SRS, will specify the plus and minus media temperature tolerance in degrees Celsius.

Code 4818 is the 1006 requirement code (see 5.4).

Code 4819 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 4820 is mandatory; other codes are optional.

Code 4820 and an "X", entered on the SRS, will specify no evidence of physical damage.

Code 4866 and an "X", entered on the SRS, will specify there shall be no evidence of moisture penetration.

5.33 Indication, Power Off

Code 3140 is the 1006 test code (see 5.4).

Code 3142 is the 1006 except test code (see 5.4).

To detail a power off indication test, it is mandatory to use Code 3144. Other codes are optional.

Code 3144 and a document designation, entered on the SRS, will specify the document by which the test shall be performed (see 5.7).

Code 3146 and a value, entered on the SRS, will specify the number of test cycles.

Code 3148 and a value, entered on the SRS, will specify the duration of the power interruption in seconds.

Code 3150 is the 1006 requirement code (see 5.4).

Code 3152 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 3153 is mandatory.

Code 3153 and an "X", entered on the SRS, will specify that requirements are detailed as follows.

Code 3154 and an "X", entered on the SRS, will specify the power off indication shall be visible with no power applied.

Code 3156 and an "X", entered on the SRS, will specify no part of the power off indicator shall be visible when power is applied.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

5.34 Insulation Resistance

Code 1370 is the 1006 test code (see 5.4).

Code 1371 Is the 1006 except test code (see 5.4).

To detail an Insulation resistance test, it is mandatory that Codes 1511 and Code 1378 or Code 1373 be entered on the SRS. Other codes are optional. Information concerning these codes is as follows:

Code 1511 and an "X" entered on the SRS, will specify the insulation resistance test method shall be as specified in Method 302 of MIL-STD-202.

Code 1378 and a letter, entered on the SRS, will specify the applicable test condition letter from Method 302 of MIL-STD-202.

Code 1373 and a value, entered on the SRS, will specify the test voltage in volts dc.

Code 1376 and a value, entered on the SRS, will specify the electrification time in seconds if other than two minutes.

Code 1377 and a value, entered on the SRS, will specify the maximum measurement error in percent permitted at the insulation resistance value required if other than 10 percent.

Code 1497 and an "X", entered on the SRS, will specify the points of application of test voltage shall be between terminations tied together and mounting hardware.

Code 1498 and an "X", entered on the SRS, will specify the points of application of test voltage shall be between terminations tied together and case.

Code 1522 and an "X", entered on the SRS, will specify that insulation resistance shall be measured between mutually insulated parts.

Code 1523 and an "X", entered on the SRS, will specify that insulation resistance shall be measured between all insulated parts and ground.

Code 1524 and an "X", entered on the SRS, will specify that insulation resistance shall be measured between current carrying parts and the case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 1372 and a value, entered on the SRS, will specify the test temperature In degrees Celsius if other than as specified in MIL-STD-202 standard test conditions, or the first test temperature if the insulation resistance test is to be performed at two temperatures.

Code 1381 and a value, entered on the SRS, will specify the second test temperature in degrees Celsius when the Insulation resistance test is to be performed at two temperatures.

Code 1383 and a value, entered on the SRS, will specify plus minus test temperature tolerance in degrees Celsius.

Code 1379 is the 1006 requirement code (see 5.4).

Code 1380 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 1407 is mandatory. Other codes are optional.

Code 1407 and an “X”, entered on the SRS, will specify that there shall be no evidence of physical damage.

Code 1384 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms at the first temperature specified with Code 1372.

Code 1387 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms at the second test temperature specified with Code 1381.

Code 1388 and an “X”, entered on the SRS, will specify the device shall remain within specified tolerance.

Code 1386 and a value, entered on the SRS, will specify the minimum insulation resistance in megohms when no temperature is specified with Codes 1372 or 1381.

5.35 Leakage, Diaphragm Capsule

Code 3160 is the 1006 test code (see 5.4).

Code 3162 is the 1006 except test code (see 5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

To detail a diaphragm capsule leakage test, it is mandatory to use Code 3164. Other codes are optional.

Code 3164 and a document designation, entered on the SRS, will specify the document by which the test shall be perfomred (see 5.7).

Code 3166 and a value, entered on the SRS, will specify the percentage of full scale deflection of the test point if other than full scale in percent.

Code 3168 and a value, entered on the SRS, will specify the pressure holding duration in minutes.

Code 3170 is the 1006 requirement code (see 5.4).

Code 3172 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 3173 is mandatory.

Code 3173 and an "X", entered on the SRS, will specify that requirements are detailed as follows.

Code 3174 and a value, entered on the SRS, will specify the maximum pointer position change in miles per hour.

Code 3176 and a value, entered on the SRS, will specify the maximum pointer position change in knots.

Code 3178 and a value, entered on the SRS, will specify the maximum pointer position change in metres per second.

Code 3180 and a value, entered on the SRS, will specify the maximum pointer position change in math number.

5.36 Life, Lamp

Code 3182 is the 1006 test code (see 5.4).

Code 3184 is the 1006 except test code (see 5.4).

To detail a lamp life test, it is mandatory to use Code 3186. Other codes are optional.

Code 3186 and an "X", entered on the SRS, will specify the test shall be performed in accordance with MIL-L-25467.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 3188 and a value, entered on the SRS, will specify the power applied duration of the test cycle in minutes.

Code 3190 and a value, entered on the SRS, will specify the power off duration of the test cycle in minutes.

Code 3192 is the 1006 requirement code (see 5.4).

Code 3194 is the 1006 except requirement code (see 5.4).

Code 3196 and a value, entered on the SRS, will specify the minimum lamp life in hours.

5.37 Lighting

Code 3200 is the 1006 test code (see 5.4).

Code 3202 is the 1006 except test code (see 5.4).

To detail a lighting test, it is mandatory to use Code 3204 or 3206. Do not use both.

Code 3204 and an "X", entered on the SRS, will specify the test shall be performed in accordance with MIL-L-25467.

Code 3206 and an "X", entered on the SRS, will specify the test shall be performed in accordance with MIL-L-27160.

Code 3210 is the 1006 requirement code (see 5.4).

Code 3212 is the 1006 except requirement code (see 5.4).

Code 3214 and an "X", entered on the SRS, will specify the requirements shall be in accordance with MIL-L-25467.

Code 3216 and an "X", entered on the SRS, will specify the requirements shall be in accordance with MIL-L-27160.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

5.38 Low Liquid Level Warning Circuit

Code 3220 is the 1006 test code (see 5.4).

Code 3222 is the 1006 except test code (see 5.4).

Code 3224 and an "X", entered on the SRS, will specify the test shall be performed in accordance with MIL-I-25645.

Code 3230 is the 1006 requirement code (see 5.4).

Code 3232 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 3233 is mandatory.

Code 3233 and an "X", entered on the SRS, will specify that requirements are detailed as follows.

Code 3234 and a value, entered on the SRS, will specify the point the warning device will activate in percent of full scale deflection.

Code 3236 and 3238 and value(s), entered on the SRS, will specify plus and minus deflection tolerance in percent, respectively.

Code 3240 and a value, entered on the SRS, will specify the point the warning device will deactivate in percent of full scale deflection.

Code 3242 and 3244 and a value(s), entered on the SRS, will specify the plus and minus deflection tolerance in percent, respectively.

5.39 Magnetic Effect

Code 3250 is the 1006 test code (see 5.4).

Code 3252 is the 1006 except test code (see 5.4).

Code 3254 and a document designation, entered on the SRS, will specify the document by which the test shall be performed (see 5.7).

Code 3260 is the 1006 requirement code (see 5.4).

Code 3262 is the 1006 except requirement code (see 5.4).

Code 3264 and a value, entered on the SRS, will specify the maximum compass deflection in degrees.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

5.40 Mounting Lugs

Code 3270 is the 1006 test code (see 5.4).

Code 3272 is the 1006 except test code (see 5.4).

To detail a mounting lugs test, it is mandatory to use Code 3274. Other codes are optional.

Code 3274 and a document designation, entered on the SRS, will specify the document by which the test shall be performed (see 5.7).

Code 3276 and a value, entered on the SRS, will specify the test load in pounds.

Code 3278 and a value, entered on the SRS, will specify the test load in kilograms.

Code 3280 and a value, entered on the SRS, will specify the load duration in seconds.

Code 3282 and a value, entered on the SRS, will specify the load duration in minutes.

Code 3284 is the 1006 requirement code (see 5.4).

Code 3286 is the 1006 except requirement code (see 5.4).

Code 3288 and an “X”, entered on the SRS, will specify there shall be no fracture or physical damage.

5.41 Open and Short Circuit

Code 3300 is the 1006 test code (see 5.4).

Code 3302 is the 1006 except test code (see 5.4).

To detail an open and short circuit test, it is mandatory to use Code 3304. Other codes are optional.

Code 3304 and an “X”, entered on the SRS, will specify the test shall be performed in accordance with MIL-I-7070.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 3306 and a value, entered on the SRS, will specify the number of open circuit tests.

Code 3308 and a value, entered on the SRS, will specify the number of short circuit tests.

Code 3310 and a value, entered on the SRS, will specify the duration of the open circuit in seconds.

Code 3312 and a value, entered on the SRS, will specify the duration of the open circuit in minutes.

Code 3314 and a value, entered on the SRS, will specify the duration of the short circuit in seconds.

Code 3316 and a value, entered on the SRS, will specify the duration of the short circuit in minutes.

Code 3318 is the 1006 requirement code (see 5.4).

Code 3320 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 3321 is mandatory.

Code 3321 and an "X", entered on the SRS, will specify that requirements are detailed as follows.

Code 3322 and an "X", entered on the SRS, will specify parts shall conform to scale error requirements.

Code 3324 and an "X", entered on the SRS, will specify there shall be no degradation of performance.

5.42 Operation, Reduced Voltage

Code 3330 is the 1006 test code (see 5.4).

Code 3332 is the 1006 except test code (see 5.4).

To detail a reduced voltage operation test, it is mandatory to use Code 3334. Other codes are optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 3334 and an "X", entered on the SRS, will specify the test shall be performed in accordance with MIL-I-81049.

Code 3336 and a value, entered on the SRS, will specify the test voltage in volts dc.

Code 3338 and 3340 and value(s). entered on the SRS, will specify the plus and minus voltage tolerance in volts dc, respectively.

Code 3342 is the 1006 requirement code (see 5.4).

Code 3344 is the 1006 except requirement code (see 5,4).

To detail requirements, Code 3345 is mandatory.

Code 3345 and an "X", entered on the SRS, will specify that require-*ments are* detailed as follows.

Code 3346 and a value, entered on the SRS, will specify the maximum reduced voltage operation error in degrees Celsius.

Code 3348 and a value, entered on the SRS, will specify the maximum reduced voltage operation error in scale divisions.

5.43 Overpressure

Code 3350 is the 1006 test code (see 5.4).

Code 3352 is the 1006 except test code (see 5.4).

To detail an overpressure test, it is mandatory to use Code 3354. Other codes are optional.

Code 3354 and a document designation, entered on the SRS, will specify the document by which the test shall be performed (see 5.7).

When a test point(s) is required, it is mandatory to specify a value(s). Codes 3390 through 3399 may be used as applicable. If the test points specified in the document referenced with Code 3354 are appropriate, it is not necessary to specify any test points.

Codes 3390 through 3399 and a value(s), entered on the SRS, will specify the first test point through the tenth test point values, respectively. All test points need not be specified but when used, the test points shall be specified in ascending order.

When test points are specified, it is mandatory to specify a test point unit of measure. Only one code may be selected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 3356 and an “X”, entered on the SRS, will specify the test point unit of measure as knots.

Code 3358 and an “X”, entered on the SRS, will specify the test point unit of measure as feet per minute.

Code 3360 and an “X”, entered on the SRS, will specify the test point unit of measure as metres per second.

Code 3362 and a value, entered on the SRS, will specify the pitot pressure in inches of water.

Code 3364 and a value, entered on the SRS, will specify the pitot pressure in inches of mercury.

Code 3366 and a value, entered on the SRS, will specify the pitot pressure in kilopascals.

Code 3368 and a value, entered on the SRS, will specify the static pressure in inches of water.

Code 3370 and a value, entered on the SRS, will specify the static pressure in kilopascals.

Code 3372 and a value, entered on the SRS, will specify the maximum rate of altitude change in feet per minute.

Code 3374 and a value, entered on the SRS, will specify the maximum rate of altitude change in metres per second.

Code 3376 and a value, entered on the SRS, will specify the pressure holding duration in minutes.

Code 3378 is the 1006 requirement code (see 5.4).

Code 3380 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 3379 is mandatory.

Code 3379 and an “X”, entered on the SRS, will specify that requirements are detailed as follows.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Codes 3400, 3402, 3404, 3406 and 3408 are available for specifying the maximum overpressure errors. It is necessary to specify only the number of different values required. When an overpressure code and value are entered on the SRS, it is mandatory to specify test points at which the value is appropriate, e.g. first, ,second, third, fourth. The term “ALL: shall be entered on the SRS if the overpressure error is applicable to all test points.

Code 3400 and a value, entered on the SRS, will specify a maximum plus and minus overpressure error.

Code 3401 and a designation(s), entered on the SRS, will specify the appropriate test points at which the overpressure error value designated with Code 3400 is applicable. The designation shall be entered on the SRS as first, second, third as determined from the document referenced with Code 1006 or test points as specified herein.

Code 3402 and a value, entered on the SRS, will specify a maximum plus and minus overpressure error.

Code 3403 and a designation(s), entered on the SRS, will specify the appropriate test points at which the overpressure error value designated with Code 3402 is applicable. The designation shall be entered on the SRS as first, second, third as determined from the document referenced with Code 1006 or test points as specified herein.

Code 3404 and a value, entered on the SRS, will specify a maximum plus and minus overpressure error.

Code 3405 and a designation(s), entered on the SRS, will specify the appropriate test points at which the overpressure error value designated with Code 3404 is applicable. The designation shall be entered on the SRS as first, second, third as determined from the document referenced with Code 1006 or test points as specified herein.

Code 3406 and a value, entered on the SRS, will specify a maximum plus and minus overpressure error.

Code 3407 and a designation(s), entered on the SRS, will specify the appropriate test points at which the overpressure error value designated with Code 3406 is applicable. The designation shall be entered on the SRS as first, second, third as determined from the document referenced with Code 1006 or test points as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 3408 and a value, entered on the SRS, will specify a maximum plus and minus overpressure error.

Code 3409 and a designation(s), entered on the SRS, will specify the appropriate test points at which the overpressure error value designated with Code 3408 is applicable. The designation shall be entered on the SRS as first, second, third as determined from the document referenced with Code 1006 or test points as specified herein.

When overpressure error(s) are specified, it is mandatory to specify an overpressure error unit of measure. Only one code may be selected.

Code 2950 and an "X", entered on the SRS, will specify the maximum overpressure error unit of measure as knots.

Code 2952 and an "X", entered on the SRS, will specify the maximum repressure error unit of measure as feet per minute.

Code 2954 and an "X", entered on the SRS, will specify the maximum overpressure error unit of measure as metres per second.

Code 3382 and an "X", entered on the SRS, will specify the item shall not exceed scale error requirements.

Code 3384 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage.

5.44 Overspeed and Reverse

Code 3420 is the 1006 test code (see 5.4).

Code 3422 is the 1006 except test code (see 5.4).

To detail an overspeed and reverse test, it is mandatory to use Code 3424. Other codes are optional.

Code 3424 and an "X", entered on the SRS, will specify the test shall be performed in accordance with MIL-I-19358.

Code 3426 and a value, entered on the SRS, will specify the forward generator shaft speed in revolutions per minute.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 3428 and a value, entered on the SRS, will specify the reverse generator shaft speed in revolutions per minute.

Code 3430 and a value, entered on the SRS, will specify the duration of forward rotation *in* minutes.

Code 3432 and a value, entered on the SRS, will specify the duration of reverse rotation in minutes.

Code 3440 is the 1006 requirement code (see 5.4).

Code 3442 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 3443 is mandatory.

Code 3443 and an "X", entered on the SRS, will specify that requirements are detailed as follows.

Code 3444 and a value, entered on the SRS, will specify the maximum change in readings from reference points in percent.

Code 3446 and a value, entered on the SRS, will specify the maximum change in readings from reference points in revolutions per minute.

5.45 Power Consumption/Indicator Current

Code 3450 is the 1006 test code (see 5.4).

Code 3452 is the 1006 except test code (see 5.4).

To detail a power consumption/indicator current test, it is mandatory to use Code 3454. Other codes are optional.

Codes 3454 and a document designation, entered on the SRS, will specify the document by which the test shall be performed (see 5.7).

Code 3456 and a value, entered on the SRS, will specify the test voltage in volts dc.

Code 3458 and a value, entered on the SRS, will specify the test voltage in volts ac.

Code 3459 and a value, entered on the SRS, will specify the ac voltage frequency in hertz.

Code 3460 is the 1006 requirement code (see 5.4).

Code 3462 is the 1006 except requirement code (see 5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

To detail requirements, Code 3463 is mandatory.

Code 3463 and an "X", entered on the SRS, will specify that requirements are detailed as follows.

Code 3464 and a value, entered on the SRS, will specify the maximum power consumption in volt-amperes.

Code 3466 and a value, entered on the SRS, will specify the maximum power consumption in watts.

Code 3468 and a value, entered on the SRS, will specify the maximum current in amperes.

Code 3470 and a value, entered on the SRS, will specify the maximum current in milliamperes.

5.46 Press To Test Circuit

Code 3472 is the 1006 test code (see 5.4).

Code 3474 is the 1006 except test code (see 5.4).

Code 3476 and a value, entered on the SRS, will specify the test shall be performed in accordance with MIL-I-25645.

Code 3478 is the 1006 requirement code (see 5.4).

Code 3480 is the 1006 except requirement code (see 5.4).

Code 3482 and an "X", entered on the SRS, will specify the pointer hall move to the zero indication or below.

47 Rain

Code 3484 is the 1006 test code (see 5.4).

Code 3486 is the 1006 except test code (see 5.4).

To detail a rain test, it is mandatory to use Code 3488. Other codes are optional.

Code 3488 and a Roman numeral, entered on the SRS, will specify the procedure of MIL-STD-81O, Method 506 by which the test shall be performed.

Code 3490 and an "X", entered on the SRS, will specify that operation during testing is required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 3492 and a value, entered on the SRS, will specify the duration of operation in minutes.

Code 3494 is the 1006 requirement code (see 5.4).

Code 3496 is the 1006 except requirement code (see 5.4).

Code 3498 and an “X”, entered on the SRS, will specify there shall be no evidence of water penetration.

5.48 Reliability Screening (Burn-In, Aging, Conditioning, Stabilization, Load Life, Overload}

The established reliability military specifications, Group A inspection, include tests that are designed to apply appropriate stresses and inspections *at a* level which will not jeopardize usage or shorten the life of acceptable parts, but which will reveal defects and accelerate failure mechanisms that are detectable by inspection or parameter measurement. This stress testing is entitled voltage aging, conditioning, voltage conditioning conditioning, high voltage stabilization, overload, load-life, burn-in, etc., in the various specifications. For the purposes of MIL-STD-35, the term “Reliability Screening” has been chosen to encompass all the above titles. The voltage code can be assigned a value of zero to affect a bake. The temperature code can be assigned a value of 25 degrees Celsius to affect a voltage stabilization.

Code 6695 is the 1006 test code (see 5.4).

Code 6696 is the 1006 except test code (see 5.4).

To detail a reliability screening test, Code 6697 is mandatory; either *Code* 6698 or 6699 is mandatory, Codes 6700 and 6701 are mandatory and other codes *are* optional. Information concerning them is as follows:

Code 66974 and an "X”, entered on the SRS, will specify to test in accordance with Method 108 of MIL-STD-202.

Code 6698 and a letter, entered on the SRS, will specify the test condition letter which specifies duration. Do not use Code 6698 with Code 6699.

Code 6699 and a value, entered on the SRS, will specify the test duration in hours. Do not use Code 6699 with Code 6698.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 6710 and an “X”, entered on the SRS, will specify that power shall be applied for 1.5 hours, and off for 0.5 hours. Do not use Code 6710 with Code 6713.

Code 6713 and an “X”, entered on the SRS, will specify that power shall be applied continuously for the duration of the test.

Code 6700 and a value, entered on the SRS, will specify the test temperature in degrees Celsius.

Code 6701 and a value, entered on the SRS, will specify the plus or minus temperature tolerance in degrees Celsius.

Code 6923 and an “X” , entered on the SRS, will specify the device all be mounted such that the temperature of one does not Influence the operature of any other deivice and there shall be no undue draft on the device.

Code 2014 and a value, entered on the SRS, will specify the input signal in percent of full scale deflection.

Code 6922 and a value, entered on the SRS, will specify the measurement interval in hours at which measurements are to be taken.

Code 6928 is the 1006 requirement code (see 5.4).

Code 6929 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 6930 and an “X”, entered on the SRS, will specify no evidence of physical damage. This code is mandatory when requirements are to be detailed after the reliability screening test.

Code 6937 and an “X” , entered on the SRS, will specify the device shall remain within specified tolerance.

Code 2024 and an “X”, entered on the SRS, will specify no pointer oscillation or erratic movement.

Code 2026 and an “X”, entered on the SRS, will specify no change in response after test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 2026 and an "X", entered on the SRS, will specify the device shall remain within scale error tolerance at room temperature.

5.49 Resistance to Soldering Heat

Code 4688 is the 1006 test code (see 5.4).

Code 4689 is the 1006 except test code (see 5.4).

To detail a resistance to soldering heat test, it is mandatory to use Codes 4698 and 4691. Other codes are optional.

Code 4698 and an "X", entered on the SRS, will specify to test in accordance with Method 210 of MIL-STD-202.

Code 4691 and a letter, entered on the SRS, will specify the applicable test condition letter.

Code 4694 and a value, entered on the SRS, will specify the quantity of terminations on each device to be tested. This code is only used when all terminations are not tested.

Code 4692 and a value, entered on the SRS, will specify the depth in inches of immersion in solder.

Code 4669 and a value, entered on the SRS, will specify the depth in millimetres of immersion in solder.

Code 4671 and an "X", entered on the SRS, will specify immersion in flux prior to immersion in solder is permitted.

Code 4989 and an "X", entered on the SRS, will specify that special preparations are permitted, such as lead straightening or orientation.

Code 4695 and a value, entered on the SRS, will specify the cooling time in minutes before final measurements are made.

Code 4699 is the 1006 requirement code (see 5.4).

Code 4700 is the 1006 except requirement code (see 5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 4701 and an "X", entered on the SRS, will specify no evidence of physical damage. This code is mandatory when requirements are to be detailed after the resistance to soldering heat test.

Code 4718 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

Code 4721 and an "X", entered on the SRS, will specify that there shall be no degradation of performance.

5.50 Response

Code 3500 is the 1006 test code (see 5.4).

Code 3502 is the 1006 except test code (see 5.4).

To detail a response test, it is mandatory to use Code 3504. Other codes are optional.

Code 3504 and a document designation, entered on the SRS, will specify the document by which the test shall be performed (see 5.7).

Codes 3506, 3508, 3510, 3512, and 3514 and value(s), entered on the SRS, will specify test point 1, 2, 3, 4, and 5 in percent of full scale deflection.

Code 3516 is the 1006 requirement code (see 5.4).

Code 3518 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 3519 is mandatory.

Code 3519 and an "X", entered on the SRS, will specify that requirements are detailed as follows.

Code 3520 and a value, entered on the SRS, will specify the maximum response time with an increasing indication in seconds.

Code 3522 and a value, entered on the SRS, will specify the maximum response time with a decreasing indication in seconds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

5.51 Salt Fog

Code 4776 is the 1006 test code (see 5.4).

Code 4779 is the 1006 except test code (see 5.4).

To detail a salt fog test, it is mandatory to use Code 4780. Other codes are optional.

Code 4780 and an "X", entered on the SRS, will specify to test in accordance with Method 509 of MIL-STD-810.

Code 4786 and a value, entered on the SRS, will specify the salt solution required in percent. Use Code 4786 only if a change from 5 percent salt solution is required.

Code 4783 and a value, entered on the SRS, will specify the duration of salt fog exposure in hours. Use Code 4783 only if a change from 48 hours of exposure is required.

Code 4775 and a value, entered on the SRS, will specify the drying period in hours. Use Code 4775 only if a change from 48 hours of drying period is required.

Code 6245 and an "X", entered on the SRS, will specify that the device under test shall be required to operate only after the drying period.

Code 6246 and an "X", entered on the SRS, will specify that the device under test shall be required to operate after exposure.

Code 6247 and an "X", entered on the SRS, will specify that the device under test must operate after exposure and after drying.

Code 6248 and an "X", entered on the SRS, will specify that the device under test must operate after 24 hours exposure while still in the salt fog chamber.

Code 4997 is the 1006 requirement code (see 5.4).

Code 4998 is the 1006 except requirement code (see 5.4).

Code 4999 and an "X", entered on the SRS will specify there shall be no evidence of corrosion, physical damage or degradation of performance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

5.52 Seal

Code 4733 is the 1006 test code (see 5.4).

Code 4734 is the 1006 except test code (see 5.4).

To detail a seal test, Codes 4732 and a test condition letter code are mandatory. Other codes are optional unless test condition letter C is specified. If test condition letter C is used, leak rate sensitivity and a procedure number must be specified also.

Code 4732 and an "X", entered on the SRS, will specify to test in accordance with Method 112 of MIL-STD-202.

Code 4737 and the letter A, entered on the SRS, will specify that test condition letter A shall apply.

If test condition letter A is specified, Codes 4738 or 4739, or both, may be used if exception to the parameters in the specified test condition letter are required. These codes and information conerning them are as follows:

Code 4738 and a media description, entered on the SRS, will specify the media to be used for the immersion bath.

Code 4739 and a value, entered on the SRS, will specify the minimum bath temperature in degrees Celsius.

Code 6320 and the letter B, entered on the SRS will specify that test condition letter B shall apply.

If test condition letter B is specified, Codes 6321 or 6322, or both, may be used if exception to the parameters in the specified test condition letter are required. These codes and information concerning them are as follows:

Code 6321 and a media description, entered on the SRS, will specify the media to be used for the immersion bath.

Code 6322 and a value, entered on the SRS, will specify the minimum bath temperature in degrees Celsius.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 6323 and a letter C, entered on the SRS, will specify that test condition letter C shall apply.

If test condition letter C is specified, Code 4741 and a procedure number code are mandatory. Other codes are optional. Information concerning them is as follows:

Code 4741 and a value, entered on the SRS, will specify the leak rate sensitivity setting in atm cm^3/s for the applicable leak detector in accordance with the procedure specified.

Code 4740 and a Roman numeral I, entered on the SRS, will specify that procedure I as specified in test condition letter C, Method 112 of MIL-STD-202 shall apply.

Code 4742 or 4736, or both and a value(s), entered on the SRS, will specify the backfill pressure in pounds per square inch or kilopascals, respectively.

Code 6324 and a Roman numeral II, entered on the SRS, will specify that procedure II as specified in test condition letter C, Method 112 ofMIL-STD-202 shall apply.

Code 6325 or 6326, or both and a value(s), entered on the SRS, will specify the backfill pressure in pounds per square inch or kilopascals, respectively.

Code 4749 and a number, entered on the SRS, will specify the number of pressure cycles applicable to procedure II of test condition letter C when pressure cycling is required.

Code 6328 and a Roman numeral III, entered on the SRS, will specify that procedure III as specified in test condition letter C, Method 112 of MIL-STD-202 shall apply.

Code 4750 and a letter, entered on the SRS, will specify the gross leak *test* condition letter applicable after completion of procedure III, test condition C, Method 112 of MIL-STD-202.

Code 6329 and a Roman numeral IV, entered on the SRS, will specify that procedure IV as specified in test condition letter C, Method 112 of MIL-STD-202 shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 4751 and a value, entered on the SRS, will specify the pressure in torr to which the chamber is to be evacuated for procedure IV of test condition C, Method 112 of MIL-STD-202.

Code 4735 and a value, entered on the SRS, will specify the pressure in kilopascals to which the chamber is to be evacuated for procedure IV, test condition C, Method 112 of MIL-STD-202.

Code 4752 and a value, entered on the SRS, will specify the duration in minutes of reduced pressure for procedure IV, test condition C, Method 112 of MIL-STD-202.

Code 6330 and a letter, entered on the SRS, will specify the gross leak test condition letter applicable after completion of procedure IV, test condition C, Method 112 of MIL-STD-202.

Code 6331 and a letter D, entered on the SRS, will specify that test condition letter D shall apply.

Code 4743 and an "X", entered on the SRS, will specify any suitable mounting fixture may be used for test condition letter D, Method 112 of MIL-STD-202.

Code 6332 and a letter E, entered on the SRS, will specify that test condition letter E shall apply.

Code 6333 and an "X", entered on the SRS, will specify any suitable mounting fixture may be used for test condition letter E, Method 112 of MIL-STD-202.

Code 4744 is the 1006 requirement code (see 5.4).

Code 4745 is the 1006 except requirement code (see 5.4).

Code 4746 and an "X", entered on the SRS, will specify the leak rate measured shall be not greater than the leak rate sensitivity specified. This code is intended for use when test condition letter C is specified, but may be used with any test condition letter, Method 112 of MIL-STD-202.

Code 4748 and an "X", entered on the SRS, will specify there shall be no bubbles indicative of leakage. This code is applicable to all test condition letters.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

5.53 Sensitivity

Code 3560 is the 1006 test code (see 5.4).

Code 3562 is the 1006 except test code (see 5.4).

To detail a sensitivity test, it is mandatory to use Code 3564. Other codes are optional.

Code 3564 and a document designation, entered on the SRS, will specify the document by which the test shall be performed (see 5.7).

Code 3566 and a value, entered on the SRS, will specify the test point in degrees Celsius.

Code 3568 and a value, entered on the SRS, will specify the temperature change in degrees Celsius for which an equivalent input must be supplied.

Code 3570 and a value, entered on the SRS, will specify the change in input resistance in ohms.

Code 3572 is the 1006 requirement code (see 5.4).

Code 3574 is the 1006 except requirement code (see 5.4).

Code 3576 and a value, entered on the SRS, will specify the indication resulting from test input in degrees Celsius.

Code 3578 and 3580, and value(s), entered on the SRS, will specify the plus and minus indication tolerance in degrees Celsius, respectively.

5.54 Shock

Code 7310 is the 1006 test code (see 5.4).

Code 7311 is the 1006 except test code (see 5.4).

To detail a shock test, it is mandatory to use Code 7312 and to specify a procedure number. When procedures I, III or IV are specified, codes to specify the applicable figure, amplitude and duration are mandatory. Other codes are optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 7312 and an “X”, entered on the SRS, will specify to test in accordance with Method 516 of MIL-STD-810.

Code 7313 and a Roman numeral I, entered on the SRS, will specify that procedure number I from Method 516 of MIL-STD-81O shall apply. When code 7313 is used, it is mandatory to use code 7317 or 7318, and Codes 7305 and 7306.

Code 7317 and an "X" , entered on the SRS, will specify that Figure 516-1 applies for determination of amplitude and duration of the sawtooth pulse.

Code 7318 and an “X”, entered on the SRS, will specify that Figure 516-2 applies for determination of amplitude and duration of the sine pulse.

Code 7305 and a letter, entered on the SRS, will specify the peak amplitude of the shock pulse in g's. The choice is letters A or B as shown in Figures 516-1 or 516-2.

Code 7306 and a letter, entered on the SRS, will specify the nominal duration of the shock pulse in milliseconds. The choice is letters C or D as shown in Figure 516-1 or 516-2.

Code 6327 and a Roman numeral II, entered on the SRS, will specify that procedure number II from Method 516 of MIL-STD-81O shall apply.

Code 6338 and a Roman numeral III, entered on the SRS, will specify that procedure number III from Method 516 of MIL-STD-81O shall apply. When Code 6338 is used, it is mandatory to use Code 6339 or 6340, and Codes 6341 and 6242.

Code 6339 and an “X” , entered on the SRS, will specify that Figure 516-1 applies for determination of amplitude and duration of the sawtooth pulse.

Code 6340 and an “X”, entered on the SRS, will specify that Figure 516-2 applies for determination of amplitude and duration of the sine pulse.

Code 6341 and a letter, entered on the SRS, will specify the peak amplitude of the shock pulse in g's. The choice is letters A or B as shown in Figures 516-1 or 516-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 6342 and a letter, entered on the SRS, will specify the nominal duration of the shock pulse in milliseconds. The choice is letters C or D as shown in Figure 516-1 or 516-2.

Code 6343 and a Roman numeral IV, entered on the SRS, will specify that procedure number IV from Method 516 of MIL-STD-810 shall apply. When Code 6343 is used, it is mandatory to use Code 6344 or 6345 and Codes 6346 and 6347.

Code 6344 and an "X", entered on the SRS, will specify that Figure 516-1 applies for determination of amplitude and duration of the sawtooth pulse.

Code 6345 and an "X", entered on the SRS, will specify that Figure 516-2 applies for determination of amplitude and duration of the sine pulse.

Code 6346 and a letter, entered on the SRS, will specify the peak amplitude of the shock pulse in g's. The choice is letters A or B as shown in Figures 516-1 or 516-2.

Code 6347 and a letter, entered *on* the SRS, will specify the nominal duration of the shock pulse in milliseconds. The choice is letters C or D as shown in Figure 516-1 or 516-2.

Code 6348 and a Roman numeral V, entered on the SRS, will specify that procedure number V from Method 516 of MIL-STD-81O shall apply.

Code 6349 and a Roman numeral VI, entered on the SRS, will specify that procedure number VI from Method 516 of MIL-STD-810 shall apply.

Code 7307 and a value, entered on the SRS, will specify the test temperature in degrees Celsius when other than ambient temperature is required.

Code 7308 and a value, entered on the SRS, will specify the temperature tolerance in degrees Celsius. Use Code 7308 only if Code 7307 has been used.

Code 7309 and an "X", entered on the SRS, will specify that operation of the device during the test is required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 7314 is the 1006 requirement code (see 5.4).

Code 7315 is the 1006 except requirement code (see 5.4).

To detail shock requirements, it is mandatory to use Code 7316. Other code is optional.

Code 7316 and an “X”, entered on the SRS, will specify there shall be no evidence of physical damage.

Code 1515 and an "X”, entered on the SRS, will specify there shall be no degradation of performance.

5.55 Solderability

Code 4661 is the 1006 test code (see 5.4).

Code 4662 is the 1006 except test code (see 5.4).

To detail a solderability test, it is mandatory to use Code 4683. Other codes are optional.

Code 4683 and an "X", entered on the SRS, will specify to test in accordance with Method 208 of MIL-STD-202.

Code 4666 and a value (quantity), entered on the SRS, will specify the quantity of terminations on each device to be tested. This code is only used when all terminations are not tested.

Code 4667 and a value, entered on the SRS, will specify the depth in inches of immersion in flux and solder. This code and value are l ntered when the required depth of immersion is to be other than to within 0.05 inch of the body.

Code 4663 and a value, entered on the SRS, will specify the depth in millimetres of immersion in flux and solder.

Code 4664 and a value, entered on the SRS, will specify the standard wrap wire, as defined in Method 208 of MIL-STD-202, is to be wrapped this number of inches from the body of the device.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 4665 and a value, entered on the SRS, will specify the standard wrap wire, as defined in Method 208 of MIL-STD-202, is to be wrapped this number of millimetres from the body of the device.

Code 6205 and an "X", entered on the SRS, will specify that special preparations are permitted, such as lead straightening or orientation.

Code 4673 is the 1006 requirement code (see 5.4).

Code 4674 is the 1006 except requirement code (see 5.4).

Code 4675 and an "X", entered on the SRS, will specify no evidence of physical damage. This code is mandatory when requirements are detailed. Other codes are optional.

Code 4672 and an "X", entered on the SRS, will specify the device shall meet the evaluation criteria specified in Method 208 of MIL-STD-202.

Code 4677 and an "X", entered on the SRS, will specify the device shall remain within specified tolerance.

5.56 Starting And Warmup, Low Temperature

Code 3600 is the 1006 test code (see 5.4).

Code 3602 is the 1006 except test code (see 5.4).

To detail a low temperature starting and warmup test, it is mandatory to use Code 3604. Other codes are optional.

Code 3604 and an "X", entered on the SRS, will specify the test shall be performed in accordance with MIL-I-25687.

Code 3606 and a value, entered on the SRS, will specify the test temperature in degrees Celsius.

Code 3608 and 3610, and value(s), entered on the SRS, will specify the plus and minus test temperature tolerance in degrees Celsius, respectively.

Code 3612 and a value, entered on the SRS, will specify the temperature exposure duration in hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 3614 and a value, entered on the SRS, will specify the applied voltage in volts ac.

Code 3616 and a value, entered on the SRS, will specify the maximum input frequency in cylces per minute.

Code 3618 and a value, entered on the SRS, will specify the warmup test generator speed in revolutions per minute.

Code 3620 and a value, entered on the SRS, will specify the warmup exposure duration in hours.

Code 3622 and a value, entered on the SRS, will specify the warmup test point in revolutions per minute.

Code 3624 and a value, entered on the SRS, will specify the warmup test point in percent of full scale.

Code 3626 is the 1006 requirement code (see 5.4).

Code 3628 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 3629 is mandatory.

Code 3629 and an "X", entered on the SRS, will specify that requirements are detailed as follows.

Code 3630 and a value, entered on the SRS, will specify the maximum reading when synchronous speed is attained in revolutions per minute.

Code 3632 and a value, entered on the SRS, will specify the minimum reading in percent revolutions per minute.

Code 3634 and a value, entered on the SRS, will specify the maximum duration to reach warmup test point in seconds.

5.57 Starting, Room Temperature

Code 3640 is the 1006 test code (see 5.4).

Code 3642 is the 1006 except test code (see 5.4).

To detail a room temperature starting test, it is mandatory to use Code 3644. Other codes are optional.

Code 3644 and an "X", entered on the SRS, will specify to test shall be performed in accordance with MIL-I-25687.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 3646 and a value, entered on the SRS, will specify the applied voltage in volts ac.

Code 3648 and a value, entered on the SRS, will specify the maximum input frequency in cycles per minute.

Code 3650 is the 1006 requirement code (see 5.4).

Code 3652 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 3653 is mandatory.

Code 3653 and an "X", entered on the SRS, will specify that requirements are detailed as follows.

Code 3654 and a value, entered on the SRS, will specify the minimum reading in percent revolutions per minute.

Code 3656 and a value, entered on the SRS, will specify the minimum reading in revolutions per minute.

Code 3658 and a value, entered on the SRS, will specify the maximum reading in revolutions per minute.

5.58 Surge, Voltage

Code 3660 is the 1006 test code (see 5.4).

Code 3662 is the 1006 except test code (see 5,4).

To detail a voltage surge test, it is mandatory to use Code 3664. Other codes are optional.

Code 3664 and a document designation, entered on the SRS, will specify the document by which the test shall be performed (see 5.7).

Code 3666 and a value, entered on the SRS, will specify the first voltage surge in volts rms.

Code 3668 and 3670 and value(s), entered on the SRS, will specify the first surge plus and minus voltage tolerance in volts rms, respectively.

Code 3671 and a value, entered on the SRS, will specify the surge voltage frequency in hertz.

Code 3672 and a value, entered on the SRS, will specify the duration of the first surge in seconds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 3674 and 3676 and value(s), entered on the SRS, will specify the first surge plus and minus duration tolerance in seconds, respectively.

Code 3678 and a value, entered on the SRS, will specify the number of surges at the first surge parameters.

Code 3680 and a value, entered on the SRS, will specify the second voltage surge in volts rms.

Code 3682 and 3684 and value(s), entered on the SRS, will specify the second surge plus and minus voltage tolerance in volts rms, respectively.

Code 3685 and a value, entered on the SRS, will specify the surge voltage frequency in hertz.

Code 3686 and a value, entered on the SRS, will specify the duration of the second surge in seconds.

Code 3688 and 3690 and value(s), entered on the SRS, will specify the second surge plus and minus duration tolerance in seconds, respectively.

Code 3692 and a value, entered on the SRS, will specify the number of surges at the second surge parameters.

Code 3694 is the 1006 requirement code (see 5.4).

Code 3696 is the 1006 except requirement code (see 5.4).

Code 3698 and an “X”, entered on the SRS, will specify the item shall conform to scale error at room temperature requirement.

5.59 Temperature - Altitude

Code 3700 is the 1006 test code (see 5.4).

Lode 3702 is the 1006 except test code (see 5.4).

To detail a temperature-altitude test, it is mandatory to use Code 3704. Other codes are optional.

Code 3704 and an “X”, entered on the SRS, will specify the test shall be performed in accordance with MIL-STD-810, Method 504.

Code 3706 and a number, entered on the SRS, will specify the equipment category number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 3705 and a value, entered the SRS will specify the climb and descent rate in feet per minute.

Code 3707 and a value, entered on the SRS, will specify the climb and descent rate in metres per second.

Code 3708 is the 1006 requirement code (see 5.4).

Code 3710 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 3711 is mandatory.

Code 3711 and an "X", entered on the SRS, will specify that requirements are detailed as follows.

Code 3712 and an "X", entered on the SRS, will specify the item shall remain within specified tolerance(s).

Code 3714 and an "X", entered on the SRS. will specify there shall be no evidence of damage.

Code 3716 and an "X", entered on the SRS. will specify the item shall remain within scale error requirements.

5.60 Temperature, High

Code 6216 is the 1006 test code (see 5.4).

Code 6217 is the 1006 except test code (see 5.4).

To detail a high temperature test, it is mandatory to use Codes 6218 and 6219. Other codes are optional.

Code 6218 and an "X". entered on the SRS, will specify to test in accordance with Method 501 of MIL-STD-81O.

Code 6219 and a Roman numeral, entered on the SRS, will specify the applicable procedure number.

Code 6220 and a value, entered on the SRS, will specify the storage temperature in degrees Celsius. This code is only used when a temperatin other than 71 degress Celsius is required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 6221 and a value, entered on the SRS, will specify the duration in hours of the high temperature storage. This code is only used when a storage other than 48 hours is required.

Code 6222 and a value, entered on the SRS, will specify the highest operating temperature in degrees Celsius at which the device under test is designed to operate.

Code 6224 and a value, entered on the SRS, will specify the operating time in minutes at the temperature specified with Code 6222. Do not use Code 6224 with Code 6225.

Code 6225 and a value, entered on the SRS, will specify the operating time in hours at the temperature specified with Code 6222. Do not use Code 6225 with Code 6224.

Code 6227 is the 1006 requirement code (see 5.4).

Code 6228 is the 1006 except requirement code (see 5.4).

To detail high temperature requirements, it is mandatory to use Code 6229.

Code 6229 and an “X”, entered on the SRS, will specify there shall be no evidence of physical damage after exposure to high temperature.

Code 4012 and an “X”, entered on the SRS, will specify item shall remain within specified tolerance(s).

Code 4014 and an “X”, entered on the SRS, will specify there shall be no sticking of movable parts.

Code 4016 and a value, entered on the SRS, will specify the percentage increase of all error requirements as a result of the test.

5.61 Temperature, Low

Code 6230 is the 1006 test code (see 5.4).

Code 6231 is the 1006 except test code (see 5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

To detail a low temperature test, it is mandatory to use Code 6232. Other codes are optional.

Code 6232 and an "X", entered on the SRS, will specify to test in accordance with Method 502 of MIL-STD-810.

Code 6234 and a value, entered on the SRS, will specify the storage temperature in degrees Celsius. This code is only used when a temperature other than -57 degrees Celsius is required.

Code 6235 and a value, entered on the SRS, will specify the duration in hours of the low temperature storage. This code is only used when a storage other than 24 hours is required.

Code 6236 and a value, entered on the SRS, will specify the lowest operating temperature in degrees Celsius at which the device under test is designed to operate.

Code 6237 and a value, entered on the SRS, will specify the chamber air velocity in feet per second where the heat transfer rate from the surface of the test item is important.

Code 6238 and a value, entered on the SRS, will specify the chamber air velocity in metres per second where the heat transfer rate from the surface of the test item is important.

Code 6315 or 6316 and a value, entered on the SRS, will specify the operation time at low temperature in minutes and hours, respectively. Do not use these codes together.

Code 6317 is the 1006 requirement code (see 5.4).

Code 6318 is the 1006 except requirement code (see 5.4).

To detail low temperature requirements, it is mandatory to use Code 6319.

Code 6319 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage.

Code 4018 and an "X", entered on the SRS, will specify the item shall remain within specified tolerance(s).

Code 4020 and an "X", entered on the SRS, will specify there shall be no sticking of movable parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 4022 and a value, entered on the SRS, will specify the percentage increase of all error requirements as a result of the test.

5.62 Temperature Rise, Indicator

Code 3720 is the 1006 test code (see 5.4).

Code 3722 is the 1006 except test code (see 5.4).

To detail an indicator temperature rise test, it is mandatory to use Code 3724. Other codes are optional.

Code 3724 and an "X", entered on the SRS, will specify the test shall be performed in accordance with MIL-I-19358.

Code 3726 and a value, entered on the SRS, will specify the test voltage in volts ac.

Codes 3728 and 3730, and value(s), entered on the SRS, will specify the plus and minus voltage tolerance in volts ac, respectively.

Code 3732 and a value, entered on the SRS, will specify the test voltage frequency in cycles per minute.

Code 3734 and a value, entered on the SRS, will specify the test duration in hours.

Code 3736 is the 1006 requirement code (see 5.4).

Code 3738 is the 1006 except requirement code (see 5.4).

Code 3740 and a value, entered on the SRS, will specify the maximum temperature rise in degrees Celsius.

5.63 Terminal Strength

Code 1409 is the 1006 test code (see 5.4).

Code 1410 is the 1006 except test code (see 5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 1375 and an “X”, entered on the SRS, will specify to test in accordance with Method 211 of MIL-STD-202. This code is mandatory if the test method is to be detailed. Other codes are optional.

There are eight additional codes to detail the test method. One or more may be entered with a value to specify the test condition letter(s) and applicable value(s). Information concerning them is as follows:

Code 1411 or Code 1419, or both and a value(s), entered on the SRS, will specify test condition letter A and the force in pounds or newtons, respectively.

Code 1412 and a value, entered on the SRS, will specify test condition letter B and the number (quantity) of bends.

Code 1413 or Code 1420, or both and a value(s), entered on the SRS, will specify test condition letter C and the weight in pounds or kilograms, respectively.

Code 1414 and an “X”, entered on the SRS, will specify test condition letter D applies.

Code 1416 or Code 1421, or both and a value(s), entered on the SRS will specify test condition letter E and the torque in pound-inches or newton-metres, respectively, to be applied.

Code 1417 is the 1006 requirement code (see 5.4).

Code 1418 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 1433 and an “X”, entered on the SRS will specify no evidence of physical damage. This code is mandatory when requirements are to be detailed after the terminal strength test.

Code 6296 and an “X”, entered on the SRS, will specify the device shall remain within specified tolerance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

5.64 Thermal Shock

Code 4712 is the 1006 test code (see 5.4).

Code 4713 is the 1006 except test code (see 5.4).

To detail a thermal shock test, it is mandatory to use Code 4714 and 4715.

Code 4714 and an "X", entered on the SRS, will specify to test in accordance with Method 107 of MIL-STD-202.

Code 4715 and a letter, entered on the SRS, will specify the applicable test condition letter.

Code 4720 is the 1006 requirement code (see 5.4).

Code 4722 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 4723 and an "X", entered on the SRS, will specify no evidence of physcial damage. This code is mandatory when requirements are to be detailed after the thermal shock test.

Code 4726 and an "X" , entered on the SRS, will specify the device shall remain within specified tolerance.

5.65 Unit Torque Gradient

Code 3750 is the 1006 test code (see 5.4).

Code 3752 is the 1006 except test code (see 5.4).

To detail a unit torque gradient test, it is mandatory to use Code 3754. Other code is optional.

Code 3754 and a document designation, entered on the SRS, will specify the document by which the test shall be performed (see 5.7).

Code 3756 and a value, entered on the SRS, will specify the displacement in degrees.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 3758 is the 1006 requirement code (see 5.4).

Code 3760 is the 1006 except requirement code (see 5.4).

Code 3762 and a value, entered on the SRS, will specify the minimum torque per degree of displacement in milligram-millimetres.

5.66 Variation, Voltage and Frequency

Code 3770 is the 1006 test code (see 5.4).

Code 3772 is the 1006 except test code (see 5.4).

To detail a voltage and frequency variation test, it is mandatory to use Code 3774. Other codes are optional.

Code 3774 and a document designation, entered on the SRS, will specify the document by which the test shall be performed (see 5.7).

When a test point voltage is specified, it is mandatory to specify the frequency. It is necessary to specify only the number of test points required.

Codes 3776 and 3778, and value(s), entered on the SRS, will specify a test point voltage and frequency in volts ac and hertz, respectively.

Codes 3780 and 3782, and value(s), entered on the SRS, will specify a test point voltage and frequency in volts ac and hertz, respectively.

Codes 3784 and 3786, and value(s), entered on the SRS, will specify a test point voltage and frequency in volts ac and hertz, respectively.

Codes 3788 and 3790, and value(s), entered on the SRS, will specify a test point voltage and frequency in volts ac and hertz, respectively.

Codes 3792 and 3794, and value(s), entered on the SRS, will specify a test point voltage and frequency In volts ac and hertz, respectively.

Codes 3796 and 3798, and value(s), entered on the SRS, will specify a test point voltage and frequency in volts ac and hertz, respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 3800 is the 1006 requirement code (see 5.4).

Code 3802 is the 1006 except requirement code (see 5.4).

Code 3804 and an "X", entered on the SRS, will specify the item shall remain within specified tolerance(s).

5.67 Vibration

Code 1521 is the 1006 test code (see 5.4).

Code 1505 is the 1006 except test code (see 5.4).

To detail the vibration test, Codes 1514 and 1518 are mandatory. Other codes are optional.

Code 1514 and an "X", entered on the SRS, will specify to test in accordance with Method 514 of MIL-STD-810.

Code 1518 and a Roman numeral, entered on the SRS, will specify the applicable procedure number selected from Method 514 of MIL-STD-810.

Code 1540 and an alpha or alphanumeric designation, entered on the SRS, will specify the equipment category of the test item as specified in Method 514 of MIL-STD-810.

Code 1525 and a letter(s), entered on the SRS, will specify the applicable test vibration curve(s). When more than one curve is required, they will be entered sequentially separated by a comma and a space. Test curves are not applicable to procedures IX, XI, XII, and XIII.

Code 1532 and a number, entered on the SRS, will specify the applicable table selected from Method 514 of MIL-STD-810.

Code 1559 and a number, entered on the SRS, will specify the applicable figure selected from Method 514 of MIL-STD-810.

Code 1424 and an "X", entered on the SRS, will specify that operation of the device under test is not required during the vibration exposure.

Code 1542 and a value, entered on the SRS, will specify the test temperature in degrees Celsius. This code is used only when the test is to be conducted at a temperature other than room ambient.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 1543 and a value, entered on the SRS, will specify the temperature tolerance in degrees Celsius.

Code 1544 and a value, entered on the SRS, will specify the time in hours that the device under test is exposed to the temperature specified with Code 1542.

Code 4680 is the 1006 requirement code (see 5.4).

Code 4681 is the 1006 except requirement code (see 5.4).

To detail requirements during and after the vibration test, Code 4682 is mandatory. Other codes are optional.

Code 4682 and an "X", entered on the SRS, will specify there shall be no evidence of physical damage.

Code 1538 and an "X", entered on the SRS, will specify that the device under test shall remain within specified tolerance.

5.68 Vibration, High Frequency

Code 1445 is the 1006 test code (see 5.4).

Code 1446 is the 1006 except test code (see 5.4).

To detail the high frequency vibration test, Code 1447 and Code 1448 are mandatory. Other codes are optional.

Code 1447 and an "X", entered on the SRS, will specify to test in accordance with Method 204 of MIL-STD-202.

Code 1448 and a letter, entered on the SRS, will specify the applicable test condition letter as selected from Method 204 of MIL-STD-202.

Code 6200 and a value, entered on the SRS, will specify the percent of rated load to be applied during test.

There are two codes available to specify the method of mounting. Only one may be used. Information concerning them is as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 4709 and an “X” , entered on the SRS, will specify any suitable mounting method may be used.

Code 4708 and an “X” , entered on the SRS, will specify normal usage mounting means shall be used.

There are two codes available to specify the method of determining mechanical resonance. Only one of the codes may be entered. Information concerning them is as follows:

Code 1533 and an “X”, entered on the SRS, will specify mechanical resonance shall be monitored visually by means of a strobotac.

Code 1534 and an "X" , entered on the SRS, will specify mechanical resonance shall be monitored by electrical output indicators.

Code 1454 is the 1006 requirement code (see 5.4).

Code 1455 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 1456 and an “X”, entered on the SRS, will specify no evidence of physcial damage. This code is mandatory when requirements are to be detailed after the high frequency vibration test.

Code 1469 and an “X”, entered on the SRS, will specify the device shall remain within specified tolerance.

5.69 Zero, Electrical

Code 3810 is the 1006 test code (see 5.4).

Code 3812 is the 1006 except test code (see 5.4).

To detail an electrical zero test, it is mandatory to use Code 3814. Other code is optional.

Code 3814 and a document designation, entered on the SRS, will specify the document by which the test shall be performed (see 5.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 3816 and a value, entered on the SRS, will specify the pointer displacement in degrees.

Code 3820 is the 1006 requirement code (see 5.4).

Code 3822 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 3823 is mandatory.

Code 3823 and an “X”, entered on the SRS, will specify that requirements are detailed as follows.

Code 3824 and a value, entered on the SRS, will specify the maximum distance of pointer from zero reference point in inches.

Code 3826 and a value, entered on the SRS, will specify the maximum distance of pointer from zero reference point in millimetres.

5.70 Zero Error At Low Temperature

Code 3830 is the 1006 test code (see 5.4).

Code 3832 is the 1006 except test code (see 5.4).

To detail a zero error at low temperature test, it is mandatory to use Code 3834. Other codes are optional.

Code 3834 and an “X”, entered on the SRS, will specify the test shall be performed in accordance with MIL-I-7721.

Code 3836 and a value, entered on the SRS, will specify the nominal test temperature in degrees Celsius.

Code 3838 and a value, entered on the SRS, will specify the minimum exposure duration in hours.

Code 3840 is the 1006 requirement code (see 5.4).

Code 3842 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 3843 is mandatory.

Code 3843 and an “X”, entered on the SRS, will specify that requirements are detailed as follows.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Code 3844 and a value, entered on the SRS, will specify the maximum zero error in feet per minute.

Code 3846 and a value, entered on the SRS, will specify the maximum zero error in metres per second.

5.71 Zero Error During Temperature Change

Code 3850 is the 1006 test code (see 5.4).

Code 3852 is the 1006 except test code (see 5.4).

To detail a zero error during temperature change test, it is mandatory to use Code 3854. Other code is optional.

Code 3854 and an "X", entered on the SRS, will specify the test shall be performed in accordance with MIL-I-7721.

Code 3856 and a value, entered on the SRS, will specify the observation duration in hours.

Code 3860 is the 1006 requirement code (see 5.4).

Code 3862 is the 1006 except requirement code (see 5.4).

To detail requirements, Code 3863 is mandatory.

Code 3863 and an "X", entered on the SRS, will specify that requirements are detailed as follows.

Code 3864 and a value, entered on the SRS, will specify the maximum reading during first test interval in feet per minute.

Code 3866 and a value, entered on the SRS, will specify the maximum reading during first test interval in metres per second.

Code 3868 and a value, entered on the SRS, will specify the maximum reading during remainder of observation duration in feet per minute.

Code 3870 and a value, entered on the SRS, will specify the maximum reading during remainder of observation duration in metres per second.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
1.3	Enter on the SRS requirements from MIL-STD-35	
5.9	Design and Construction	
5.9.1	Indicator Scale Range	
	Pounds per square inch	
	*Minimum (psi)	1562
	*Maximum (psi)	1564
	Kilopascals	
	*Minimum (kPa)	1566
	*Maximum (kPa)	1568
	Pounds per hour	
	*Minimum (lb/hr)	1570
	*Maximum (lb/hr)	1572
	Kilograms per hour	
	*Minimum (kg/hr)	1574
	*Maximum (kg/hr)	1576
	Degrees Celsius	
	*Minimum (deg C)	1578
	*Maximum (deg C)	1580

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.9.1 (Cont)	Indicator Scale Range (Cont)	
	Feet per minute	
	*Minimum (ft/min)	1582
	*Maximum (ft/min)	1584
	Metres per second	
	*Minimum (m/s)	1586
	*Maximum (m/s)	1588
	Knots	
	*Minimum (knots)	1590
	*Maximum (knots)	1592
	Mach number	
	*Minimum (Mach)	1594
	*Maximum (Mach)	1596
	Litres	
	*Minimum (1)	1598
	*Maximum (1)	1600

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.9.1 (Cont)	Indicator Scale Range (Cont)	
	Cubic metres	
	*Minimum (m^3)	1602
	*Maximum (m^3)	1604
	Revolutions per minute	
	Scale 1	
	*Minimum (rpm)	1606
	*Maximum (rpm)	1608
	Scale 2	
	*Minimum (rpm)	1610
	*Maximum (rpm)	1612
	Percent of rated engine speed	
	Scale 1	
	*Minimum (pet)	1614
	*Maximum (pet)	1616
	Scale 2	
	*Minimum (pet)	1618
	*Maximum (pet)	1620

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.9.1 (Cont)	Percent of rated engine speed (Cont)	
	Scale 3	
	*Minimum (pet)	1622
	*Maximum (Pet)	1624
	Number	
	*Minimum (no.)	1626
	l Maximum (no.)	1628
5.9.2	Indicator Sub Scale Range	
	Pounds per square inch	
	*Minimum (psi)	1630
	*Maximum (psi)	1632
	Kilopascals	
	*Minimum (kPa)	1634
	*Maximum (kPa)	1636
	Pounds per hour	
	l Minimum (lb/hr)	1638
	*Maximum (lb/hr)	1640

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.9.2 (Cont)	Indicator Sub Scale Range (Cont)	
	Kilograms per hour	
	*Minimum (kg/hr)	1642
	*Maximum (kg/hr)	1644
	Degrees Celsius	
	*Minimum (deg C)	1646
	*Maximum (deg C)	1648
	Feet per minute	
	*Minimum (ft/min)	1650
	*Maximum (ft/min)	1652
	Metres per second	
	*Minimum (m/s)	1654
	*Maximum (m/s)	1658
	Knots	
	*Minimum (knots)	1660
	*Maximum (knots)	1662

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.9.2 (Cont)	Indicator Sub Scale Range (Cont)	
	Mach number	
	*Minimum (mach)	1664
	*Maximum (mach)	1666
	Litres	
	*Minimum (l)	1670
	*Maximum (l)	1672
	Cubic metres	
	*Minimum (m^3)	1674
	*Maximum (m^3)	1676
	Number	
	*Minimum (no.)	1698
	*Maximum (no.)	1700
5.9.3	Port Configuration	
	Port 1	
	Document (dot des)	1702
	Size	
	(in.)	1704
	(mm)	1706

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC C	
	NAME	CODE
5.9.3 (Cont)	Port 1 (Cont)	
	Style (letter)	1708
	Designation (name)	1710
	Port 2	
	Document (dot des)	1712
	Size	
	(in.)	1714
	(mm)	1716
	Style (letter)	1718
	Designation (name)	1720
5.9.4	Minimum Zero Adjust from Initial Point	
	Plus (select one)	
	Scale divisions (no.)	1722
	Degrees of arc (no.)	1724
	(deg C)	1726
	(fpm)	1728
	(m/s)	1730

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.9.4 (Cont)	Minimum Zero Adjust from Initial Point (Cont)	
	Minus (select one)	
	Scale divisions (no.)	1732
	Degrees of arc (no.)	1734
	(deg C)	1736
	(fpm)	1738
	(m/s)	1740
	Maximum movement	
	(deg C)	1742
5.9.5	Hermetic seal	
	Hermetic seal required.	1750
5.9.6	Case	
	Case per (dot des)	1752
	Color (name)	1754
	Color (designation)	1755
	*Color document (dot des)	1756

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.9.7	Pointer	
	Pointer(s) per (dot des)	1758
	Color (name)	1760
	Color (designation)	1761
	*Color document (dot des)	1762
5.9.8	Cover glass	
	Cover glass per (dot des)	1764
	Cover glass coating (dot des)	1766
	Cover glass mounting (maximum distance from dial)	
	(in.)	1768
	(mm)	1770
5.9.9	Parallax	
	Maximum distance between pointer and dial	
	(in.)	1772
	(mm)	1774
5.9.10	Bearings	
	Bearings per (dot des)	1776

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.9.11	Lubrication	
	Lubrication per (dot des)	1778
5.9.12	Filling media	
	Helium	
	Minimum (pct)	1779
	Maximum (pct)	1780
	(dot des)	1782
	Nitrogen	
	Minimum (pct)	1794
	Maximum (pct)	1786
	(dot des)	1788
5.9.13	Electrical Receptacle	
	Electrical receptacle(s)	
	(dot des)	1790
	Vendor identification(s) (FSCM)	1792
	Part number(s)	1794

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.9.14	Overload Protection	
	Overload protection required	1798
5.9.15	Maximum weight	
	(oz)	1800
	(lb)	1802
	(g)	1804
	(kq)	1806
5.9.16	Dial marking (select one)	
	(dot des)	1826
	Per Table I	Table I
	Tolerance for HEIGHT OR LENGTH column of Table I	
	*Plus (select one)	
	(in.)	1810
	(mm)	1812
	*Minus (select one)	
	(in.)	1814
	(mm)	1816

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.9.16 (Cont)	Dial Marking (Cont)	
	Tolerance for WIDTH OF LINE OR GRADUATION column of Table I.	
	*Plus (select one)	
	(in.)	1818
	(m)	1820
	*Minus (select one)	
	(in.)	1822
	(mm)	1824
5.9.17	Indicator Input	
	(Type)	1900
	*(dot des)	1902
5.9.18	Indicator Power	
	Volts ac (Vac)	1904
	Plus ac voltage tolerance (Vac)	1906
	Minus ac voltage tolerance (Vac)	1908

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.9.18 (Cont)	Indicator Power (Cont)	
	Volts dc (Vdc)	1910
	Plus dc voltage tolerance (Vdc)	1912
	Minus dc voltage tolerance (Vdc)	1914
	Frequency (Hz)	1916
	Plus frequency tolerance (Hz)	1918
	Minus frequency tolerance (Hz)	1920
5.9.19	Lighting Circuit Voltage	
	Volts ac (Vac)	1922
	Plus ac voltage tolerance (Vac)	1924
	Minus ac voltage tolerance (Vac)	1926
	Volts dc (Vdc)	1928
	Plus dc voltage tolerance (Vdc)	1930
	Minus dc voltage tolerance (Vdc)	1932

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.10	Acceleration	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	6249
	Per 1006 document except (see 5.4)____	6250
	Per MIL-STD-810, Method 513.	6252
	*A level (9)	6275
	*Vehicle category. (Select one)	
	Airplane.	6240
	Helicopter.	6241
	Manned aerospace vehicle.	6242
	Air launched missile.	6243
	Ground launched missile.	6244
	Procedure Number (Roman numeral)	6256
	Test time (min)	6259

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.10 (Cont)	Acceleration (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	6271
	Per 1006 document except (see 504) _	6272
	As follows:	
	*No evidence of physical damage.	6273
	No degradation of performance.	6276
5.77	Cold Junction Compensator Lag	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	2030
	Per 1006 document except (see 5.4) ____	2032
	Per MIL-I-7884.	2034
	Low test temperature (deg C)	2036
	Plus temperature tolerance (deg C)	2038
	Minus temperature tolerance (deg C)	2040
	Low temperature exposure duration (hr)	2042
	Maximum rate of temperature decrease (deg C/min)	2044

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.11 (Cont)	Per MIL-I-7884. (Cont)	
	High test temperature (deg C)	2046
	Plus temperature tolerance (deg C)	2048
	Minus temperature tolerance (deg C)	2050
	High temperature exposure duration (hr)	2052
	Rate of temperature increase (deg C/min)	2054
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	2060
	Per 1006 document except (see 5.4)____	2062
	As follows:	
	Maximum variance in readings from readings obtained at room temperature (deg C)	2064
5.12	Current, Resistance Bulb	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	2070
	Per 1006 document except (see 5.4)____	2072

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.12 (Cont)	*Test Methods (Cont)	
	Per MIL-I-81049.	2074
	Test load (ohm)	2076
	Plus load tolerance (ohm)	2078
	Minus load tolerance (ohm)	2080
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	2084
	Per 1006 document except (see 5.4) ____	2086
	As follows:	
	Maximum current (mA)	2088
5.13	Damping	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	2100
	Per 1006 document except (see 5.4) ____	2102

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.13 (Cont)	*Test Methods (Cont)	
	Per document from 5.7 (dot des)	2104
	Unit of measure for test points (select one)	
	Pounds per hour	
	Test points	
	1 (lb/hr)	2106
	2 (lb/hr)	2108
	3 (lb/hr)	2110
	4 (lb/hr)	2112
	5 (lb/hr)	2114
	Percent of full scale	
	Test points	
	1 (pct)	2116
	2 (pct)	2118
	3 (pct)	2120
	4 (pct)	2122
	5 (pct)	2124

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.13 (Cont)	Per document from 5.7 (Cont)	
	Degrees Celsius	
	Test points	
	1 (deg C)	2126
	2 (deg C)	2128
	3 (deg C)	2130
	Pounds per square inch	
	Test points	
	1 (psi)	2132
	2 (psi)	2134
	3 (psi)	2136
	Kilopascals	
	Test points	
	1 (kPa)	2138
	2 (kPa)	2140
	3 (kPa)	2142

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.13 (Cont)	Per document from 5.7 (Cont)	
	Knots	
	Test points	
	1 (knots)	2144
	2 (knots)	2146
	3 (knots)	2148
	Metres per second	
	Test points	
	1 (m/s)	2150
	2 (m/s)	2152
	3 (m/s)	2154
	Cubic metres per hour	
	Test points	
	1 (m^3/hr)	2156
	2 (m^3/hr)	2158
	3 (m^3/hr)	2160

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.13 (Cont)	Per document from 5.7 (Cont)	
	Double amplitude pointer movement caused by input in percent of full scale (pct)	2162
	Frequency (Hz)	2164
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	2170
	Per 1006 document except (see 5.4)____	2172
	As follows:	
	Time required for pointer to reach test point (s)	2174
	Plus time tolerance (s)	2176
	Minus time tolerance (s)	2178
	Damping factor	
	Minimum (no.)	2180
	Maximum (no.)	2182

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.14	DC Resistance	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	2200
	Per 1006 document except (see 5.4)_____	2202
	Per MIL-STD-202, Method 303	2204
	Limit of error or measuring apparatus, if other than one-tenth of specified tolerance (pct)	2206
	Test voltage (Vdc)	2208
	Maximum period of uninterrupted test - voltage application, if other than 5 seconds (s)	2210
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	2212
	Per 1006 document except (see 5.4) ____	2214
	As follows:	
	Maximum resistance (select one)	
	(ohms)	2216
	(milliohms)	2218

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.15	Dead Spot	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	2220
	Per 1006 document except (see 5.4)____	2222
	Per MIL-I-25645.	2224
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	2230
	Per 1006 document except (see 5.4) ___	2232
	As follows:	
	Percent of full-scale indication	
	(pct)	2234
5.16	Dielectric Withstanding Voltage at Reduced Barometric Pressure	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	4883
	Per 1006 document except (see 5.4) ____	4884
	Per MIL-STD-202, Method 301.	6300

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.16 (Cont)	Per MIL-STD-202, Method 301. (Cont)	
	*Altitude per Method 105 of MIL-STD-202.	
	*Test condition (letter)	4886
	*Test voltage (select one)	
	(Vdc)	4885
	(Vac)	4849
	Point of voltage application.	
	Between terminations tied together and mounting hardware.	6311
	Between terminations tied together and case.	6312
	Between mutually insulated parts.	6292
	Between all insulated parts and ground.	6293
	Between current carrying parts and the case.	6294
	Duration of voltage application if other than 60 (s)	4891
	Regulation of test voltage (pct)	6308
	Minimum KVA rating of voltage source (KVA)	4900

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.16 (Cont)	Per MIL-STD-202, Method 301. (Cont)	
	Maximum surge current (select one)	
	(A)	4902
	(mA)	6310
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4907
	Per 1006 document except (see 5.4)____	4908
	As follows:	
	*No evidence of flashover, mechanical damage, arcing, or insulation breakdown.	4906
	Maximum leakage (mA)	4894
	Remain within specified tolerance.	4901
5.17	Dielectric Withstanding Voltage at Sea Level	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	4860
	Per 1006 document except (see 5.4)____	4861
	Per MIL-STD-202, Method 301.	4862

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.17 (Cont)	Per MIL-STD-202, Method 301. (Cont)	
	*Test voltage (select one)	
	(Vdc)	4854
	(Vac)	4855
	Points of voltage application.	
	Between terminations tied together and mounting hardware.	4842
	Between terminations tied together and case.	4848
	Between mutually insulated parts.	4844
	Between all insulated parts and ground.	4845
	Between current carrying parts and the case.	4846
	Duration of voltage application if other than 60 (s)	4867
	Regulation of test voltage (pct)	4869
	Minimum kVA rating of voltage source (kVA)	4870

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.17 (Cont)	Per MIL-STD-202, Method 301. (Cont)	
	Maximum surge current (select one)	
	(A)	4717
	(mA)	4897
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4873
	Per 1006 document except (see 5.4)____	4874
	As follows:	
	*No evidence of flashover, mechanical damage, arcing, or insulation breakdown.	4856
	Maximum leakage (mA)	4875
	Remain within specified tolerance.	4847
5.18	Dust	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	4876
	Per 1006 document except (see 5.4) ____	4895

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.18 (Cont)	*Test Methods (Cont)	
	Per MIL-STD-810, Method 510.	4953
	Test specimen(s) shall be operated during test step(s) (no.)	4872
	*Duration of operation (hr)	6299
	Specimen orientation shall be changed during test.	1539
	Second 6-hour test immeddiately following temperature stabilization in step 2.	4956
	Step 2 and step 3 temperature if other than 63 (deg C)	4840
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4702
	Per 1006 document except (see 5.4) ____	4724
	As follows:	
	*No evidence of physical damage.	1510
	No evidence of dust penetration.	4801

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.19	Effect Of Lead Length	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	2240
	per 1006 document except (see 5.4)____	2242
	Per document from 5.7 (dot des)	2244
	Initial lead length	
	(ft)	2246
	(m)	2248
	Test lead length	
	(ft)	2250
	(m)	2252
	Lead size (awg)	2254
	Lead diameter (mm)	2256
	Lead resistance	
	Initial (ohms)	2258
	Test (ohms)	2260

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.19 (Cont)	Effect Of Lead Length (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	2262
	Per 1006 document except (see 5.4) ____	2264
	As follows:	
	Maximum change in indication	2265
	(deg of arc)	2266
	(deg C)	2268
	No change in specified scale errors	2270
5.20	Electromagnetic Interference	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1950
	Per 1006 document except (see 5.4)____	1952
	As follows:	1953

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.20 (Cont)	As follows: (Cont)	
	MIL-STD-461, Appendix method (des)	1954
	MIL-STD-462	1955
	*Test method(s)	
	CE (no.)	1956
	RE(no.)	1958
	CS (no.)	1960
	RS (no.)	1962
	CRE (no.)	1964
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1970
	Per 1006 document except (see 5.4)____	1972
	Per MIL-STD-461 limits.	1974
5.21	Endurance	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	2300
	Per 1006 document except (see 5.4) ____	2302

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.21 (Cont)	*Test Methods (Cont)	
	Per document from 5.7 (dot des)	2304
	Test duration (hr)	2306
	Number of test cycles (no.)	2308
	Test cycle rate (c/rein)	2310
	Pointer test point	
	(pet of full scale deflection)	2307
	Maximum pointer oscillation	
	(Plus or minus scale divisions from test point)	2309
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	2312
	Per 1006 document except (see 5.4) ___	2314
	As follows:	2315
	No evidence of physical damage.	2316
	Maximum change in readings in percent (pct)	2318
	Remain in specified tolerance(s).	2320

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.22	Error, Friction	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	2330
	Per 1006 document except (see 5.4).	2332
	Per document from 5.7 (dot des)	2334
	Test point values, column 1, Table II	Table II
	*Test points units of measure (select one)	
	Scale divisions.	2336
	Percent of full scale.	2338
	Pounds per square inch.	2340
	Kilopascals.	2342
	Pounds per hour.	2344
	Kilograms per hour.	2346
	Degrees Celsius.	2348
	Feet per minute.	2350
	Metres per second.	2352
	Knots.	2354
	Mach number.	2356

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.22	*Test points units of measure (Cont)	
	Litres.	2358
	Cubic metres.	2360
	Revolutions per minute.	2362
	Percent of rated engine speed.	2364
	Low temperature test temperature (deg C)	2412
	Plus temperature tolerance (deg C)	2513
	Minus temperature tolerance (deg C)	2418
	High temperature test temperature (deg C)	2419
	Plus temperature tolerance (deg C)	2424
	Minus temperature tolerance (deg C)	2425
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	2426
	Per 1006 document except (see 5.4)___	2427

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.22 (Cont)	*Requirements (Cont)	
	As follows:	2428
	Error value(s) columns 2, 3, and 4, Table II	Table II
	*Error units of measure (select one)	
	Scale divisions.	2370
	Pounds per square inch.	2371
	Kilopascals.	2376
	Pounds per hour.	2377
	Kilograms per hour.	2382
	Degrees Celsius.	2383
	Feet per minute.	2388
	Metres per second.	2389
	Knots.	2394
	Mach number.	2395
	Litres.	2400
	Cubic metres.	2401
	Revelutions per minute.	2406
	Percent of rated engine speed.	2407

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.23	Error, Pointer Zero Position	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	2510
	Per 1006 document except (see 5.4) ____	2512
	Test as follows:	
	*No applied input.	2514
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	2520
	Per 1006 document except (see 5.4) ____	2522
	As follows:	2523
	Maximum pointer error from zero position	
	knots	
	Plus (kn)	2524
	Minus (kn)	2526
	Scale divisions	
	Plus (scale divisions)	2528
	Minus (scale divisions)	2529

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.24	Error, Position	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	2440
	Per 1006 document except (see 5.4) ____	2442
	Per document from 5.7 (dot des)	2444
	Test point(s)	
	1 (value)	2480
	2 (value)	2481
	3 (value)	2482
	4 (value)	2483
	5 (value)	2484
	6 (value)	2485
	7 (value)	2486
	8 (value)	2487
	9 (value)	2488
	10 (value)	2489

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.24 (Cont)	Test point(s) (Cont)	
	*Test point units of measure (select one)	
	Scale divisions.	2446
	Percent of full scale.	2448
	Pounds per square inch.	2450
	Kilopascals.	2452
	Pounds per hour.	2454
	Kilograms per hour.	2456
	Degrees Celsius.	2458
	Feet per minute.	2460
	Metres per second.	2462
	Knots.	2464
	Mach number.	2466
	Litres.	2468
	Cubic metres.	2470
	Revolutions per minute.	2472
	Percent of rated engine speed.	2474

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.24 (Cont)	Error, Position (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	2500
	Per 1006 document except (see 5.4)____	2502
	As follows:	
	*Maximum plus and minus position error (value)	2490
	*Test point(s) (ales, e.g., first, second, etc.)	2491
	Maximum plus and minus position error (value)	2492
	*Test point(s) (des, e.g., first, second, etc.)	2493
	Maximum plus and minus position error (value)	2494
	*Test point(s) (des, e.g., first, second, etc.)	2495
	Maximum plus and minus position error (value)	2496
	*Test point(s) (des, e.g., first, second, etc.)	2497

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.24 (Cont)	As follows: (Cont)	
	Maximum plus and minus position error (value)	2498
	*Test point(s) (des, e.g., first, second, etc.)	2499
	*Position error units of measure (select one)	
	Scale divisions.	2445
	Pounds per square inch.	2447
	Kilopascals.	2449
	Pounds per hour.	2451
	Kilograms per hour.	2453
	Degrees Celsius.	2455
	Feet per minute.	2457
	Metres per second.	2459
	Knots.	2461
	Mach number.	2463
	Litres.	2465
	Cubic metres.	2467
	Revolutions per minute.	2469
	Percent of rated engine speed.	2471

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.25	Error, Scale	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	2550
	Per 1006 document except (see 5.4) ____	2552
	Per document from 5.7 (dot des)	2554
	Test input values, Table III, column 1	Table III
	*Test input units of measure (select one)	
	Volts ac.	2586
	Volts dc.	2588
	Pounds per square inch.	2590
	Kilopascals.	2592
	Pounds per square inch differential	2594
	Kilopascals differential.	2596
	Revolutions per minute.	2598
	Input resistance in ohms.	2602

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.25 (Cont)	*Test Methods (Cont)	
	Test point values, Table III, column 2	Table III
	*Test points or required indication units of measure (select one)	
	Scale divisions.	2556
	Percent of full scale.	2558
	Pounds per square inch.	2560
	Kilopascals.	2562
	Pounds per hour.	2564
	Kilograms per hour.	2566
	Degrees Celsius.	2568
	Feet per minute.	2570
	Metres per second.	2572
	Knots.	2574
	Mach number.	2576
	Litres.	2578
	Cubic metres.	2580
	Revolutions per minute.	2582
	Percent of rated engine speed.	2584

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.25 (Cont)	Per document from 5.7 (dot des) (Cont)	
	Test temperature exposure duration at	
	-54 deg C (hr)	2616
	-35 deg C (hr)	2618
	-5 deg C (hr)	2620
	0 deg C (hr)	2622
	71 deg C (hr)	2624
	High temperature (hr)	2626
	Low temperature (hr)	2628
	High temperature test temperature (deg C)	2630
	Plus temperature tolerance (deg C)	2633
	Minus temperature tolerance (deg C)	2635
	Low temperature test temperature (deg C)	2632
	Plus temperature tolerance (deg C)	2634
	Minus temperature tolerance (deg C)	2636

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.25 (Cont)	Error, Scale (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	2638
	Per 1006 document except (see 5.4) ____	2640
	As follows:	2639
	Scale error values, Table III, columns 3 through 10	
	*Maximum scale error units of measure (select one)	
	Scale divisions.	2557
	Pounds per square inch.	2559
	Kilopascals.	2561
	Pounds per hour.	2563
	Kilograms per hour.	2565
	Degrees Celsius.	2567
	Feet per minute.	2569
	Metres per second.	2571
	Knots.	2573
	Mach number.	2575
	Litres.	2577

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.25 (Cont)	*Maximum scale error units of measure (Cont)	
	Cubic metres.	2579
	Revolutions per minute.	2581
	Percent of rated engine speed.	2583
5.26	Fogging	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3000
	Per 1006 document except (see 5.4) ____	3002
	Per document from 5.7 (dot ales)	3004
	Test temperature (deg C)	3006
	Minimum duration at test temperature (hr)	3008
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3010
	per 1006 document except (see 5.4) ____	3012
	As follows:	
	No evidence of fogging.	3014

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.27	Frequency Cycling	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3020
	Per 1006 document except (see 5.4)____	3022
	Per document from 5.7 (dot des)	3024
	Test voltage (Vac)	3028
	Plus voltage tolerance (Vac)	3030
	Minus voltage tolerance (Vac)	3032
	Test frequency range	
	*Minimum (Hz)	3036
	*Maximum (Hz)	3038
	Test cycle	
	Initial frequency increase duration (s)	3040
	Initial frequency decrease duration (s)	3042
	Second frequency increase duration (s)	3044
	Second frequency decrease duration (s)	3046

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.27 (Cont)	Per document from 5.7 (dot des) (Cont)	
	Test duration (hr)	3048
	Test cycle rate (cycles per hr)	3050
	Power removal duration (hr)	3052
	Reapplied test voltage (Vac)	3054
	Plus test voltage tolerance (Vac)	3056
	Minus test voltage tolerance (Vac)	3058
	Reapplied test voltage duration (hr)	3060
	Second test cycle duration (hr)	3062
	Second test cycle frequency range	
	Minimum (Hz)	3064
	Maximum (Hz)	3066
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3070
	Per 1006 document except (see 5.4) ____	3072
	As follows:	
	Remain within scale error at room temperature requirements.	3074

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.28	Fungus	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	4753
	Per 1006 document except (see 5.4) ____	4754
	Per MIL-STD-810, Method 508.	4755
	Test period if other than 28 (days)	4756
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4759
	Per 1006 document except (see 5.4)____	4760
	Fungus resistant by certification or by test.	4761
	No evidence of fungus growth when tested.	4762
5.29	Helium Test	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3080
	Per 1006 document except (see 5.4) ___	3082
	Per document from 5.7 (dot des)	3084

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.29 (Cont)	Helium Test (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3086
	Per 1006 document except (see 5.4) ____	3088
	As follows:	
	Helium detection required.	3090
5.30	Humidity	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	4787
	Per 1006 document except (see 5.4) ____	4788
	Per MIL-STD-810, Method 507.	4789
	*Procedure number (select one)	
	Test procedure I (I)	4767
	Extreme temperature before testing (deg C)	4777
	*Duration of temperature exposure.	4778

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.30 (Cont)	*Procedure number (select one) (Cont)	
	Test procedure II (II)	6334
	Cycle limited to 24 hrs. duration.	4716
	Test procedure III (III)	6335
	Test procedure IV (IV)	6336
	Test procedure V (V)	6337
	No. of cycles if other than 20 (no.)	4800
	Water purity by conductivity method.	4764
	Operation and measurement at high temperature portion of cycle (no.(s))	4916
	Insulation Resistance, cycle (no.(s))	4919
	Dielectric Withstanding Voltage cycle (no.(s))	4920
	Operation and measurement at low temperature portion of cycle (no.(s))	1554
	Insulation Resistance, cycle (no.(s))	1555
	Dielectric Withstanding Votlage cycle (no.(s))	1556

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.30 (Cont)	Humidity (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4797
	Per 1006 document except (see 5.4) ___	4798
	As follows:	
	*No evidence of corrosion or physical damage.	4799
	No degradation of performance.	4815
	Remain within specified tolerance.	4791
	No evidence of arcing, flashover, or insulation breakdown when DWV applied.	1477
	Minimum insulation resistance at high humidity (megohms)	4795
	Minimum insulation resistance after drying (megohms)	4805
	Maximum leakage at high humidity (mA)	4813
	Maximum leakage after drying (mA)	4803

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.31	Hysteresis	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3100
	Per 1006 document except (see 5.4)_____	3102
	Per MIL-I-83026.	3104
	Test points	
	Pounds per hour	
	Point 1 (pph)	3106
	Point 2 (pph)	3108
	Point 3 (pph)	3110
	Point 4 (pph)	3112
	Kilograms per hour	
	Point 1 (kg/hr)	3114
	Point 2 (kg/hr)	3116
	Point 3 (kg/hr)	3118
	Point 4 (kg/hr)	3120

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.31	Test points (Cont)	
	Percent of full scale	
	Point 1 (pct)	3113
	Point 2 (pct)	3115
	Point 3 (pct)	3117
	Point 4 (pct)	3119
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3122
	Per 1006 document except (see 5.4)____	3124
	As follows:	3125
	Error	
	Reference point	
	(pph)	3126
	(kg/hr)	3128
	(scale divisions)	3129

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.31	Error (Cont)	
	Maximum error below reference point	
	(pph)	3130
	(kg/hr)	3132
	(scale divisions)	3133
	Maximum error above reference point	
	(pph)	3134
	(kg/hr)	3136
	(scale divisions)	3137
5.32	Immersion	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	4808
	per 1006 document except (see 5.4) ____	4809
	Per MIL-STD-202, Method 104.	4810
	*Test condition (letter)	4811
	Test media high temperature (deg C)	4002
	Plus media temperature tolerance (deg C)	4004
	Minus media temperature tolerance (deg C)	4006

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.32 (Cont)	Immersion (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4818
	Per 1006 document except (see 5.4) ____	4819
	As follows:	
	*No evidence of physical damage.	4820
	No evidence of moisture penetration.	4866
5.33	Indication, Power Off	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3140
	Per 1006 document except (see 5.4) ____	3142
	Per document from 5.7 (dot des)	3144
	Number of cycles (no.)	3146
	Duration of power interruption (s)	3148

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.33 (Cont)	Indication, Power Off (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3150
	Per 1006 document except (see 5.4)____	3152
	As follows:	3153
	Power off indication shall be visible with no power applied.	3154
	No part of power off indicator visible when power is applied.	3156
5.34	Insulation Resistance	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1370
	Per 1006 document except (see 5.4)____	1371
	Per MIL-STD-202, Method 302.	1511
	*Condition (select one)	
	Test condition (letter)	1378
	Test voltage (Vdc)	1373
	Electrication time, if other than 2 minutes (s)	1376
	Maximum measurement error at required value if other than 10 (pct)	1377

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.34 (Cont)	Per MIL-STD-202, Method 302. (Cont)	
	Points of application of test voltage.	
	Between terminations tied together and mounting hardware.	1497
	Between terminations tied together and case.	1498
	Between mutually insulated parts.	1522
	Between insulated parts and ground.	1523
	Between current carrying parts and the case.	1524
	First test temperature (deg C)	1372
	Second test temperature (deg C)	1381
	Temperature tolerance (deg C)	1383
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1379
	Per 1006 document except (see 5.4) ____	1380
	As follows:	
	*No evidence of physical damage.	1407
	Minimum insulation resistance (select one)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.34	Minimum insulation resistance (select one) (Cont)	
	Single test	
	(megohms)	1386
	Multiple test	
	First test (megohms)	1384
	Second test (megohms)	1387
	Remain within specified tolerance.	1388
5.35	Leakage, Diaphram Capsule	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3160
	Per 1006 document except (see 5.4)____	3162
	Per document from 5.7 (dot des)	3164
	Percentage of full scale deflection if other than full scale (pct)	3166
	Pressure holding duration (min)	3168

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.35 (Cont)	Leakage, Diaphragm Capsule (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3170
	Per 1006 document except (see 5.4) ____	3172
	As follows:	3173
	Maximum pointer position change	
	(mph)	3174
	(knots)	3176
	(m/s)	3178
	(math no.)	3180
5.36	Life, Lamp	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3182
	Per 1006 document except (see 5.4) ____	3184
	Per MIL-L-25467.	3186
	Test cycle	
	Power applied duration (min)	3188
	Power off duration (min)	3190

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.36 (Cont)	Life, Lamp (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3192
	Per 1006 document except (see 5.4) ___	3194
	As follows:	
	Minimum lamp life (hr)	3196
5.37	Lighting	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3200
	Per 1006 document except (see 5.4) ____	3202
	Per MIL-L-25467.	3204
	Per MIL-L-27160.	3206
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3210
	Per 1006 document except (see 5.4) ____	3212
	Per MIL-L-25467.	3214
	Per MIL-L-27160.	3216

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.38	Low Liquid Level Warning Circuit	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3220
	Per 1006 document except (see 5.4)____	3222
	Per MIL-I-25645.	3224
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3230
	Per 1006 document except (see 5.4) ____	3232
	As follows:	3233
	Warning device activation	
	Percent of full scale deflection (pct)	3234
	Plus percent tolerance (pct)	3236
	Minus percent tolerance (pct)	3238

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.38 (Cont)	As follows: (Cont)	
	Warning device deactivation	
	Percent of full scale deflection (pct)	3240
	Plus percent tolerance (pct)	3242
	Minus percent tolerance (pct)	3244
5.39	Magnetic Effect	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3250
	Per 1006 document except (see 5.4) ____	3252
	Per document from 5.7 (dot des)	3254
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3260
	Per 1006 document except (see 5.4) ____	3262
	As follows:	
	Maximum compass deflection (deg)	3264

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.40	Mounting Lugs	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3270
	per 1006 document except (see 5.4) ____	3272
	Per document from 5.7 (dot ales)	3274
	Test load	
	(lb)	3276
	(kg)	3278
	Load duration (select one)	
	(s)	3280
	(min)	3282
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3284
	Per 1006 document except (see 5.4) ____	3286
	As follows:	
	No fracture or physical damage.	3288

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.41	Open And Short Circuit	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3300
	Per 1006 document except (see 5.4) ____	3302
	Per MIL-I-7070.	3304
	Number of open circuit tests (no.)	3306
	Number of short circuit tests (no.)	3308
	Duration of open circuit (select one)	
	(s)	3310
	(min)	3312
	Duration of short circuit (select one)	
	(s)	3314
	(min)	3316
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3318
	Per 1006 document except (see 5.4) ____	3320
	As follows:	3321
	Conform to scale error requirements.	3322
	No degradation of performance.	3324

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.42	Operation, Reduced Voltage	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3330
	Per 1006 document except (see 5.4) ____	3332
	Per MIL-I-81049.	3334
	Test voltage (Vdc)	3336
	Plus voltage tolerance (Vdc)	3338
	Minus voltage tolerance (Vdc)	3340
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3342
	Per 1006 document except (see 5.4) ____	3344
	As follows:	3345
	Maximum reduced voltage operation error	
	(deg C)	3346
	(scale divisions)	3348

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.43	Overpressure	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3350
	Per 1006 document except (see 5.4)____	3352
	Per document from 5.7 (dot des)	3354
	Test points	
	*Value	
	1 (value)	3390
	2 (value)	3391
	3 (value)	3392
	4 (value)	3393
	5 (value)	3394
	6 (value)	3395
	7 (value)	3396
	8 (value)	3397
	9 (value)	3398
	10 (value)	3399

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.43 (Cont)	Test Points (Cont)	
	*Unit of measure (select one)	
	Knots.	3356
	Feet per minute.	3358
	Metres per second.	3360
	Pitot pressure	
	(in. water)	3362
	(in. mercury)	3364
	(kPa)	3366
	Static pressure	
	(in. water)	3368
	(kPa)	3370
	Maximum rate of altitude change	
	(feet per minute)	3372
	(metres per second)	3374
	Pressure holding duration (min)	3376

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.43 (Cont)	Overpressure (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3378
	Per 1006 document except (see 5.4) ___	3380
	As follows:	3379
	Overpressure error	
	*Maximum overpressure error units of measure (select one)	
	Knots.	2950
	Feet per minute.	2952
	Metres per second.	2954
	Maximum plus and minus overpressure error (value)	3400
	*Test point(s) (des, e.g., first, second, etc)	3401
	Maximum plus and minus overpressure error (value)	3402
	*Test point (s) (des, e.g., first, second, etc)	3403

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC C	
	NAME	CODE
5.43 (Cont)	Overpressure error (Cont)	
	Maximum plus and mins overpressure error (value)	3404
	*Test point(s) (des, e.g., first, second, etc)	3405
	Maximum plus and minus overpressure error (value)	3406
	*Test point(s) (des, e.g., first, second, etc)	3407
	Maximum plus and minus overpressure error (value)	3408
	*Test point(s) (ales, e.g., first, second, etc)	3409
	Item shall not exceed scale error requirements.	3382
	No physical damage.	3384
5.44	Overspeed And Reverse	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3420
	Per 1006 document except (see 5.4) ___	3422
	Per MIL-I-19358.	3424

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.44 (Cont)	Per MIL-I-19358. (Cont)	
	Generator shaft speed	
	Forward (rpm)	3426
	Reverse (rpm)	3428
	Duration of rotation	
	Forward (min)	3430
	Reverse (min)	3432
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3440
	Per 1006 document except (see 5.4) ____	3442
	As follows:	3443
	Maximum change in readings from reference points	
	(pct)	3444
	(rpm)	3446

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.45	Power Consumption/Indicator Current	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3450
	Per 1006 document except (see 5.4) ____	3452
	Per document from 5.7 (dot des)	3454
	Test voltage	
	(Vdc)	3456
	(Vac)	3458
	Frequency (Hz)	3459
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3460
	Per 1006 document except (see 5.4) ___	3462
	As follows:	3463
	Maximum power consumption (select one)	
	(VA)	3464
	(W)	3466
	Maximum current (select one)	
	(A)	3468
	(mA)	3470

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.46	Press To Test Circuit	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3472
	Per 1006 document except (see 5.4)_____	3474
	Per MIL-I-25645.	3476
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3478
	Per 1006 document except (see 5.4) ____	3480
	As follows:	
	Pointer moves to zero indication or below.	3482
5.47	Rain	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3484
	Per 1006 document except (see 5.4) ___	3486
	Per MIL-STD-810, Method 506.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.47 (Cont)	*Test Methods (Cont)	
	*Procedure (Roman numeral)	3488
	Operation required.	3490
	Duration of operation (min)	3492
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3494
	Per 1006 document except (see 5.4) ____	3496
	As follows:	
	No evidence of water penetration	3498
5.48	Reliability Screening	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	6695
	Per 1006 document except (see 5.4)____	6696
	Per MIL-STD-202, Method 108.	6697
	*Duration (select one)	
	Test condition (letter)	6698
	(hr)	6699

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.48 (Cont)	Per MIL-STD-202, Method 108. (Cont)	
	*Test temperature (deg C)	6700
	*Tolerance (deg C)	6701
	Duty cycle (select one)	
	1.5 hours on and 0.5 hours off.	6710
	Steady state.	6713
	Still air required.	6923
	Input signal in percent of full scale deflection (pct)	2014
	Measurement intervals (hr)	6922
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	6928
	Per 1006 document except (see 5.4) ____	6929
	As follows:	
	*No evidence of physical damage.	6930
	Remain within specified tolerance.	6937
	No pointer oscillation or erratic movement.	2024
	No change in response after test.	2026
	Remain within scale error tolerance at room temperature.	2028

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.49	Resistance to Soldering Heat	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	4688
	per 1006 document except (see 5.4) ____	4689
	Per MIL-STD-202, Method 210.	4698
	*Test condition (letter)	4691
	Number of terminations tested (quantity)	4694
	Depth of immersion in solder	
	(in.)	4692
	(mm)	4669
	Immersion in flux permitted.	4671
	Special preparations permitted.	4989
	Cooling time (min)	4695

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.49 (Cont)	Resistance to Soldering Heat (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4699
	Per 1006 document except (see 5.4) ____	4700
	As follows:	
	*No evidence of physical damage	4701
	Remain within specified tolerance	4718
	No degradation of performance.	4721
5.50	Response	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3500
	Per 1006 document except (see 5.4) ____	3502
	Per document from 5.7 (dot des)	3504
	Test point(s)	
	Percent of full scale deflection	
	Point 1 (pct)	3506
	Point 2 (pct)	3508
	Point 3 (pct)	3510
	Point 4 (pct)	3512
	Point 5 (pct)	3514

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.50 (Cont)	Response (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3516
	Per 1006 document except (see 5.4)____	3518
	As follows:	3519
	Maximum response time	
	Increasing indication (s)	3520
	Decreasing indication (s)	3522
5.51	Salt Fog	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4)	4776
	Per 1006 document except (see 5.4) ____	4779
	Per MIL-STD-810, Method 509.	4780
	Salt Solution if other than 5 (pct)	4786
	Exposure period if other than 48 (hr)	4783
	Drying period if other than 48 (hr)	4775
	Operate only after drying.	6245
	Operate after exposure.	6246
	Operate after exposure and after drying.	6247
	Operate after 24 hr of exposure.	6248

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.51 (Cont)	Salt Fog (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4997
	Per 1006 document except (see 5.4)____	4998
	As follows:	
	*No evidence of corrosion, physical damage or degradation of performance.	4999
5.52	Seal	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	4733
	Per 1006 document except (see 5.4) ____	4734
	Per MIL-STD-202, Method 112.	4732
	*Test condition letter (select one)	
	Letter A (A)	4737
	Media for test (name)	4738
	Minimum media temperature (deg C)	4739

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.52	*Test condition letter (Cont)	
	Letter B (B)	6320
	Media for test (name)	6321
	Minimum media temperature (deg C)	6322
	Letter C (C)	6323
	*Leak rate sensitivity (atm cm^3/s)	4741
	*Test procedure (select one)	
	Test procedure I (I)	4740
	Backfill pressure	
	(psi)	4742
	(kPa)	4736
	Test procedure II (II)	6324
	Backfill pressure	
	(psi)	6325
	(kPa)	6326
	Number of pressure cycles (quantity)	4749
	Test procedure III (III)	6328
	Gross leak test condition (letter)	4750

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.52 (Cont)	Test procedure (Cont)	
	Test procedure IV (IV)	6329
	Chamber pressure	
	(torr)	4751
	(kPa)	4735
	Duration of reduced pressure (min)	4752
	Gross leak test condition (letter)	6330
	Letter D (D)	6331
	Any suitable mounting fixture.	4743
	Letter E (E)	6332
	Any suitable mounting fixture.	6333
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4744
	Per 1006 document except (see 5.4) ____	4745
	As follows: (select one)	
	Per specified test method sensitivity.	4746
	No bubbles indicative of leakage.	4748

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.53	Sensitivity	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3560
	Per 1006 document except (see 5.4) ____	3562
	Per document from 5.7 (dot des)	3564
	Test point (deg C)	3566
	Temperature change for which input must be supplied (deg C)	3568
	Change in input resistance (ohm)	3570
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3572
	Per 1006 document except (see 5.4) ___	3574
	As follows:	
	Indication resulting from test input (deg C)	3576
	Plus indication tolerance (deg C)	3578
	Minus indication tolerance (deg C)	3580

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.54	Shock	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	7310
	Per 1006 document except (see 5.4) ____	7311
	Per MIL-STD-810, Method 516.	7312
	*Procedure (select one)	
	Procedure I, (I)	7313
	*Figure (select one)	
	Figure 516-1 applies.	7317
	Figure 516-2 applies.	7318
	*Amplitude (A or B) (letter)	7305
	*Duration (C or D) (letter)	7306
	Procedure II (II)	6327
	Procedure III, (III)	6338
	*Figure (Select one)	
	Figure 516-1 applies.	6339
	Figure 516-2 applies.	6340

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.54 (Cont)	Figure 516-2 applies. (Cont)	
	*Amplitude (A or B) (letter)	6341
	*Duration (C or D) (letter)	6342
	Procedure IV (IV)	6343
	*Figure (select one)	
	Figure 516-1 applies.	6344
	Figure 516-2 applies.	6345
	*Amplitude (A or B) (letter)	6346
	*Duration (C or D) (letter)	6347
	Procedure V (V)	6348
	Procedure VI (VI)	6349
	Test temperature if other than ambient (deg C)	7307
	Temperature tolerance (deg C)	7308
	Operation during test required.	7309

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.54 (Cont)	Shock (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	7314
	Per 1006 document except (see 5.4) ____	7315
	As follows:	
	*No evidence of physical damage.	7316
	No degradation of performance.	1515
5.55	Solderability	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	4661
	Per 1006 document except (see 5.4) ____	4662
	Per MIL-STD-202, Method 208.	4683
	Number of terminals to be tested (quantity)	4666
	Depth of inversion	
	(in.)	4667
	(mm)	4663

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.55 (Cont)	Per MIL-STD-202, Method 208. (Cont)	
	Distance wrap wire applied from body	
	(in.)	4664
	(mm)	4665
	Special preparations permitted.	6205
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4673
	Per 1006 document except (see 5.4)_____	4674
	As follows:	
	*No evidence of physical damage.	4675
	Meet evaluation criteria specified in Method 208 of MIL-STD-202.	4672
	Remain within specified tolerance.	4677
5.56	Starting And Warmup, Low Temperature	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3600
	Per 1006 document except (see 5.4) ___	3602
	Per MIL-I-25687.	3604

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.56 (Cont)	Per MIL-I-25687. (Cont)	
	Test temperature (deg C)	3606
	Plus test temperature tolerance (deg C)	3608
	Minus test temperature tolerance (deg C)	3610
	Temperature exposure duration (hr)	3612
	Applied voltage (Vac)	3614
	Maximum input frequency (cycles per min)	3616
	Warmup test generator speed (rpm)	3618
	Warmup exposure duration (hr)	3620
	Warmup test point	
	(rpm)	3622
	(pct of full scale)	3624
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3626
	Per 1006 document except (see 5.4) ____	3628
	As follows:	3629

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.56 (Cont)	As follows: (Cont)	
	Maximum reading when synchronous speed is attained (rpm)	3630
	Minimum reading (pct rpm)	3632
	Maximum duration to reach warmup test point (s)	3634
5.57	Starting, Room Temperature	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3640
	Per 1006 document except (see 5.4) ____	3642
	Per MIL-I-25687.	3644
	Applied voltage (Vac)	3646
	Maximum input frequency (cycles per min)	3648
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3650
	Per 1006 document except (see 5.4) ___	3652
	As follows:	3653

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.57 (Cont)	As follows: (Cont)	
	Minimum reading	
	(pct rpm)	3654
	(rpm)	3656
	Maximum reading	
	(rpm)	3658
5.58	Surge, Voltage	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3660
	Per 1006 document except (see 5.4) ___	3662
	Per document from 5.7 (dot des)	3664
	First voltage surge (Vrms)	3666
	Plus voltage tolerance (Vrms)	3668
	Minus voltage tolerance (Vrms)	3670
	Frequency (Hz)	3671
	Duration of first voltage surge (s)	3672
	Plus duration tolerance (s)	3674
	Minus duration tolerance (s)	3676

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.58 (Cont)	Per document from 5.7 (dot des) (Cont)	
	Number of first voltage surges (no.)	3678
	Second voltage surge (Vrms)	3680
	Plus voltage tolerance (Vrms)	3682
	Minus voltage tolerance (Vrms)	3684
	Frequency (Hz)	3685
	Duration of second voltage surge (s)	3686
	Plus duration tolerance (s)	3688
	Minus duration tolerance (s)	3690
	Number of second voltage surges (no.)	3692
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3694
	Per 1006 document except (see 5.4) ____	3696
	As follows:	
	Item shall conform to scale error at room temperature requirement.	3698

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (ML)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.59	Temperature - Altitude	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3700
	Per 1006 document except (see 5.4) ____	3702
	Per MIL-STD-810, Method 504.	3704
	Equipment category (no.)	3706
	Climb and descent rate	
	(fpm)	3705
	(m/s)	3707
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3708
	Per 1006 document except (see 5.4) ____	3710
	As follows:	3711
	Item shall remain within specified tolerance(s).	3712
	No evidence of damage.	3714
	Item shall remain within scale error requirements.	3716

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.60	Temperature, High	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	6216
	Per 1006 document except (see 5.4) ____	6217
	Per MIL-STD-810, Method 501.	6218
	*Procedure (Roman numeral)	6219
	Storage temperature if other than 71 (deg C)	6220
	Storage duration if other than 48 (hr)	6221
	Highest operating temperature (deg C)	6222
	Operation time (select one)	
	(min)	6224
	(hr)	6225
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	6227
	Per 1006 document except (see 5.4) ____	6228
	As follows:	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.60	As follows: (Cont)	
	*No evidence of physical damage.	6229
	Item shall remain within specified tolerance(s).	4012
	No sticking of movable parts.	4014
	Percentage increase of all error requirements as result of test (pct)	4016
5.61	Temperature, Low	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	6230
	Per 1006 document except (see 5.4) ____	6231
	Per MIL-STD-810, Method 502.	6232
	Storage temperature if other than -57 (deg C)	6234
	Storage duration if other than 24 (hr)	6235
	Lowest operating temperature (deg C)	6236
	Chamber air velocity	
	(ft/s)	6237
	(m/s)	6238
	Operation time (select one)	
	(min)	6315
	(hr)	6316

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.61 (Cont)	Temperature, Low (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	6317
	Per 1006 document except (See 5.4) ____	6318
	As follows:	
	*No evidence of physical damage.	6319
	Remain within specified tolerance(s).	4018
	No sticking of movable parts.	4020
	Percentage increase of all error requirements as result of test (pct)	4022
5.62	Temperature Rise, Indicator	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3720
	Per 1006 document except (see 5.4) ____	3722
	Per MIL-I-19358.	3724

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.62 (Cont)	Per MIL-I-19358. (Cont)	
	Test voltage (Vac)	3726
	Plus voltage tolerance (Vac)	3728
	Minus voltage tolerance (Vac)	3730
	Frequency (cycles per minute)	3732
	Test duration (hr)	3734
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3736
	Per 1006 document except (see 5.4) ____	3738
	As follows:	
	Maximum temperature rise (deg C)	3740
5.63	Terminal Strength	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1409
	Per 1006 document except (see 5.4) _____	1410
	Per MIL-STD-202, Method 211.	1375

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.63 (Cont)	Per MIL-STD-202, Method 211. (Cont)	
	*Test conditions (select one or more)	
	Test condition A, applied force	
	(lb)	1411
	(N)	1419
	Test condition B, (no.) of bends	1412
	Test condition C, load	
	(lb)	1413
	(kg)	1420
	Test condition D.	1414
	Test condition E, torque	
	(lb-in.)	1416
	(NŽm)	1421
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1417
	per 1006 document except (see 5.4) ____	1418
	As follows:	
	*No evidence of physical damage.	1433
	Remain within specified tolerance.	6296

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.64	Thermal Shock	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	4712
	Per 1006 document except (see 5.4) ____	4713
	Per MIL-STD-202, Method 107.	4714
	*Test condition (letter)	4715
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4720
	Per 1006 document except (see 5.4) ____	4722
	As follows:	
	*No evidence of physical damage.	4723
	Remain with specified tolerance.	4726
5.65	Unit Torque Gradient	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3750
	Per 1006 document except (see 5.4) ___	3752
	Per document from 5.7 (dot des)	3754
	Displacement (deg)	3756

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.65 (Cont)	Unit Torque Gradient (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3758
	Per 1006 document except (see 5.4) ____	3760
	As follows:	
	Minimum torque per degree of displacement.	
	(mgŽmm)	3762
5.66	Variation, Voltage And Frequency	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3770
	Per 1006 document except (see 5.4) ____	3772
	Per document from 5.7 (dot des)	3774
	Test points	
	Voltage (Vac)	3776
	*Frequency (Hz)	3778
	Voltage (Vac)	3780
	*Frequency (Hz)	3782

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.66 (Cont)	Test Points (Cont)	
	Voltage (Vac)	3784
	*Frequency (Hz)	3786
	Voltage (Vac)	3788
	*Frequency (Hz)	3790
	Voltage (Vac)	3792
	*Frequency (Hz)	3194
	Voltage (Vac)	3796
	*Frequency (Hz)	3798
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3800
	Per 1006 document except (see 5.4) ___	3802
	As follows:	
	Remain within specified tolerance(s).	3804

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.67	Vibration	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1521
	Per 1006 document except (see 5.4) ___	1505
	Per MIL-STD-810, Method 514.	1514
	*Procedure Number (Roman numeral)	1518
	Equipment (Category)	1540
	Curve [letter(s)]	1525
	Applicable Table (no.)	1532
	Applicable Figure (no.)	1559
	Operation not required.	1424
	Temperature if other than room ambient (deg C)	1542
	Temperature tolerance (deg C)	1543
	Duration at temperature (hr)	1544

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.67 (Cont)	Vibration (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	4680
	Per 1006 document except (see 5.4) ___	4681
	As follows:	
	*No evidence of physical damage.	4682
	Remain within specified tolerance.	1538
5.68	Vibration, High Frequency	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	1445
	per 1006 document except (see 5.4) ____	1446
	Per MIL-STD-202, Method 204.	1447
	*Test condition (letter)	1448
	Percent rated load applied (pct)	6200
	Method of mounting (select one)	
	Any suitable mounting method.	4709
	Normal means.	4708

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.68 (Cont)	Per MIL-STD-202, Method 204. (Cont)	
	Method of determining mechanical resonance (select one)	
	Visually by means of a strobotac.	1533
	Electrical output indicators.	1534
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	1454
	Per 1006 document except (see 5.4) ___	1455
	As follows:	
	*No evidence of physical damage.	1456
	Remain within specified tolerance.	1469
5.69	Zero, Electrical	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3810
	Per 1006 document except (see 5.4) ____	3812
	Per document from 5.7 (dot des)	3814
	Pointer displacement (deg)	3816

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.69 (Cont)	Zero, Electrical (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3820
	Per 1006 document except (see 5.4) ____	3822
	As follows:	3823
	Maximum distance of pointer from zero referenced point.	
	(in.)	3824
	(m)	3826
5.70	Zero Error At Low Temperature	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3830
	Per 1006 document except (see 5.4) ____	3832
	Per MIL-I-7721.	3834
	Nominal test temperature (deg C)	3836
	Minimum exposure duration (hr)	3838

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.70 (Cont)	Zero Error At Low Temperature (Cont)	
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3840
	Per 1006 document except (see 5.4) ___	3842
	As follows:	3843
	Maximum zero error	
	(fpm)	3844
	(m/s)	3846
5.71	Zero Error During Temperature Change	
	*Test Methods (Select one)	
	Per 1006 document (see 5.4).	3850
	Per 1006 document except (see 5.4) ____	3852
	Per MIL-I-7721.	3854
	Observation duration (hr)	3856
	*Requirements (Select one)	
	Per 1006 document (see 5.4).	3860
	Per 1006 document except (see 5.4) ___	3862
	As follows:	3863

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CHARACTERISTIC CODE
5.71 (Cont)	As follows: (Cont)	
	Maximum reading during first test interval.	
	(fpm)	3864
	(m/s)	3866
	Maximum reading during remainder of observation duration.	
	(fpm)	3868
	(m/s)	3870

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SECTION 6

USE OF AEDPS

6.1 Procedure

The step by step procedure contained in MIL-STD-35 is applicable to Indicators, Pointer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SECTION 7

FIGURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

THIS SPACE INTENTIONALLY
LEFT BLANK

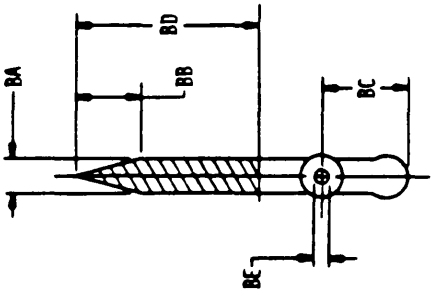


FIGURE 032-01-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

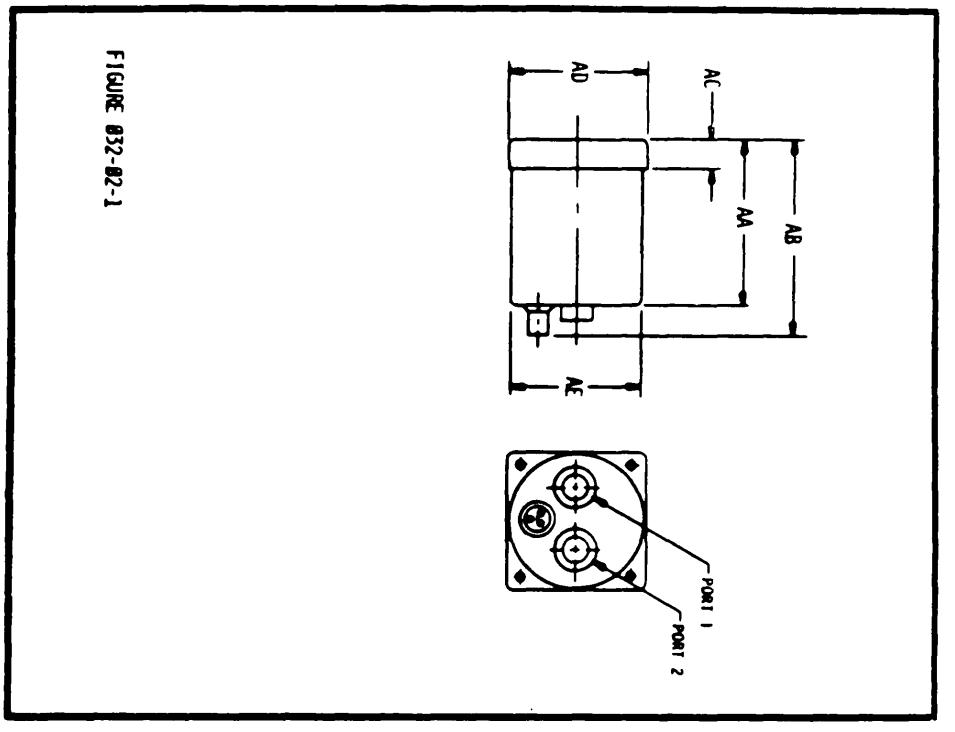


FIGURE 032-02-1

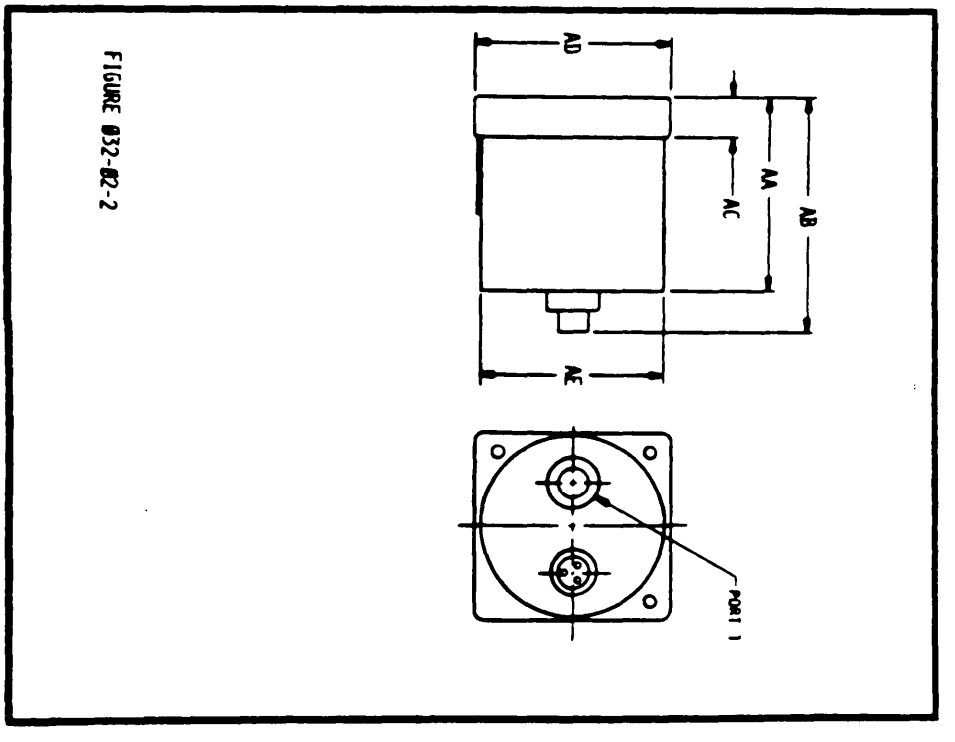


FIGURE 032-02-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

THIS SPACE INTENTIONALLY
LEFT BLANK

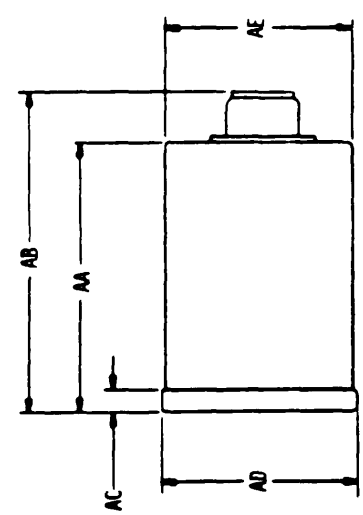


FIGURE 832-82-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SECTION 8

TABLES

Tables contained in MIL-STD-35 are applicable to Indicators, Pointer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

TABLE I. INDICATOR DIAL MARKING

(See 5.9.16)

INDICATOR DIAL MARKING TABLE

MARKING		HEIGHT OR LENGTH		WIDTH OF LINE OR GRADATION		COLOR, MATERIAL OR FINISH
		VALUE	UNITS	VALUE	UNITS	
1830		1831	1832	1833	1834	1835
1836		1837	1838	1839	1840	1841
1842		1843	1844	1845	1846	1847
1848		1849	1850	1851	1852	1853
1854		1855	1856	1857	1858	1859
1860		1861	1862	1863	1864	1865
1866		1867	1868	1869	1870	1873
1872		1873	1874	1875	1876	1877
1878		1879	1880	1881	1882	1883
1884		1885	1886	1887	1888	1889
*28		*5	*5	*5	*5	*8
COL 1		COL 2	COL 3	COL 4	COL 5	COL 6

*Number of print characters per column (column width). Heading spans are shown by underlining.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes are used will print. The table will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

TABLE II, FRICTION ERROR

(See 5.22)

FRICTION ERROR TABLE

TEST POINTS	FRICTION ERROR (PLUS AND MINUS) AT ROOM TEMP	AT LOW TEMP	AT HIGH TEMP
2366	2367	2368	2369
2372	2373	2374	2375
2378	2379	2380	2381
2384	2385	2386	2387
2390	2391	2392	2393
2396	2397	2398	2399
2402	2403	2404	2405
2408	2409	2410	2411
2414	2415	2416	2417
2420	2421	2422	2423
*23	*7	*7	*7
COL 1	2	3	4
TEST	REQT	REQT	REQT

*Number of print characters per column (colnmn width). Heading spans are shown by underlining. Column parameters are indicated as either test or requirement at the end of each column. Number of print characters, “TEST”, or “REQT” will not appear on the generated document.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes are used will print. The table will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

TABLE III. SCALE ERROR

(See 5.25)

SCALE ERROR TABLE

TEST INPUT	TEST POINT OR REQUIRED INDICATION	SCALE ERROR (PLUS AND MINUS) AT ROOM TEMP	AT -54 DEG C	AT -54 DEG C	AT -5 DEG C	AT 0 DEG C	AT +71 DEG C	AT LOW TEMP	AT HIGH TEMP
2641	2642	2643	2644	2645	2646	2647	2648	2649	2650
2651	2652	2653	2654	2655	2656	2657	2658	2659	2660
2661	2662	2663	2664	2665	2666	2667	2668	2669	2670
2671	2672	2673	2674	2675	2676	2677	2678	2679	2680
2683	2682	2683	2684	2685	2686	2687	2688	2689	2690
2691	2692	2693	2694	2695	2696	2697	2698	2699	2700
2701	2702	2703	2704	2705	2706	2707	2708	2709	2710
2711	2712	2713	2714	2715	2716	2717	2718	2719	2720
2721	2722	2723	2724	2725	2726	2727	2728	2729	2730
2731	2732	2733	2734	2735	2736	2737	2738	2739	2740
2741	2742	2743	2744	2745	2746	2747	2748	2749	2750
2751	2752	2753	2754	2755	2756	2757	2758	2759	2760
2761	2762	2763	2764	2765	2766	2767	2768	2769	2770
2771	2772	2773	2774	2775	2776	2777	2778	2779	278C
2781	2782	2783	2784	2785	2786	2787	2788	2789	2790
2791	2792	2793	2794	2795	2796	2797	2798	2799	2800
2801	2802	2803	2804	2805	2806	2807	2808	2809	28110
2811	2812	2813	2814	2815	2816	2817	2818	2819	2820
2821	2822	2823	2824	2825	2826	2827	2828	2829	2830
2831	2832	2833	2834	2835	2836	2837	2838	2839	2840
2841	2842	2843	2844	2845	2846	2847	2848	2849	2850
2851	2852	2853	2854	2855	2856	2857	2858	2859	2860
2861	2862	2863	2864	2065	2866	2867	2868	2869	2870
2871	2872	2873	2874	2875	2876	2877	2878	2879	2880
2881	2882	2883	2884	2885	2886	2887	2888	2889	2890
*6	*10	*5	*5	*5	*5	*5	*5	*5	*5
COL 1	2	3	4	5	6	7	8	9	10
TEST	TEST	REQT	REQT	REQT	REQT	REQT	REQT	REQT	REQT

*Number of print characters per column (column width). Heading spans are shown by underlining. Column parameters are indicated as either test or requirement at the end of each column. Number of print characters, column numbers and “TEST”, or “REQT” will not appear on the generated document.

Codes selected from the table and entered on the SRS along with the desired data will cause the computer to generate the table and enter the data in the respective cells. Only those lines from which codes are used will print. The table will appear in Section 3 of the MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___ OF ___

TITLE CODE | REQUESTER NO.

1 2 3 4 5 6 7 8 9 10 11 12

THIS FORM IS USED TO INITIATE A REQUEST FOR AN AEDPS DOCUMENT (SEE PARAGRAPH TITLED SPECIFICATIONS REQUIREMENT SHEET, SECTION 5 OF MIL-STD-35).

MARK IF APERTURE CARDS REQUIRED ☐

MARK IF SEARCH ONLY ☐

REVISION TO AEDPS DOCUMENT NO.:

REQUESTER'S NAME _____

MAILING ADDRESS _____

_____

PHONE NO. A/C _____

INDICATORS, POINTER CHARACTERISTIC NAME	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60 65 70 75 79	LINE NO. 80
*DATE	1 Ø Ø 3		
*FSCM/CODE IDENT OF REQUESTER	1 Ø Ø 4		
*PRIME CONTRACT NUMBER	1 Ø Ø 5		
*APPLICABLE GENERAL SPECIFICATION	1 Ø Ø 6		
*APPROVED ITEM NAME CODE	1 Ø Ø 7		
*ITEM APPLICATION	1 Ø Ø 8		
DRAWING FIGURE NUMBER(S)	1 Ø Ø 9		
DIMENSIONS - TABLE A	USE BLANK SRS LINES		
*APPLICABLE DOCUMENTS TABLE B			
*SOURCE - TABLE R OR S			
*SOURCE OR SPECIFICATION CONTROL - APPROPRIATE CODE(S)			
TEST METHOD - SELECT CODE 156Ø or 1561			
MATERIALS INSPECTION - APPROPRIATE CODE			
QUALIFICATION INSPECTION SELECT CODE 5298 or 5299			
FIRST ARTICLE INSPECTION APPROPRIATE CODE(S)	USE BLANK SRS LINES		
QUALITY CONFORMANCE INSPECTION APPROPRIATE CODE(S)			

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ APPLICABLE DOCUMENTS - TABLE B PROPERLY ENTERED
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (OTHER THAN MULTILINE STATEMENT)
- ☐ MANDATORY CHARACTERISTIC CODES TABLE AND VALUES NOT SUPPLIED
- ☐ MULTILINE STATEMENT NOT NUMBERED IN COLUMN 80
- ☐ POUND SIGN (#) OMITTED FROM END OF STATEMENT (CHARACTERISTIC VALUE)
- ☐ USE OF POUND SIGN (#) WITHOUT ACCOMPANYING CHARACTERISTIC VALUE
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (Ø)

* MANDATORY

229/230

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Custodians:
Army-MI

Review Activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User Activity:
Army-MU

Preparing Activity:
Army-MI

(Project EDS-A126)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Missile Command
ATTN: DRSMI-RCS
Redstone Arsenal, Al 35809

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-STD-35-109	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(FOLD DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.