MIL-S-87096(NU)
15 May 1981

MILITARY SPECIFICATION

SHOULDER BOARDS AND SLEEVE INSIGNIA (COAST GUARD)

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope This specification covers the requirements for embroidered shoulder boards and sleeve insignia worn by Coast Guard officer personnel.

1.2 Classification The shoulder boards and sleeve insignia shall be of the following types and classes (see 6.2):

Type I - Curved shoulder board - (Applicable to Classes 1, 2, and 3)
Type II - Curved shoulder board - (Applicable to Classes 4 and 5)
Type III - Embroidered sleeve insignia

Class 1 - Officers of Flag Rank
Class 2 - Officers below Flag Rank
Class 3 - Chief Warrant and Warrant Officers
Class 4 - Academy Cadets
Class 5 - Officer Candidates

2. APPLICABLE DOCUMENTS

2.1 Issues of documents The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATION

FEDERAL

V-T-276 - Thread, Cotton
CCC-C-438 - Cloth, Buckram, Cotton

Beneficial comments (recommendations, additions, deletions, and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing & Textile Research Facility, 21 Strathmore Road, Natick, MA 01760 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill Rayon
MIL-C-823	- Cloth, Serge, Wool: Wool and Nylon: Polyester and Wool
MIL-C-3461	- Buttons, Insignia, Metal, Uniform and Cap
MIL-F-10884	- Fasteners, Snap
MIL-L-17507	- Lace, Ornamental
MIL-E-17568	- Embroidery Materials, Metallic and Synthetic Metallic
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-T-43548	- Thread, Polyester, Cotton-Covered

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitchings
FED-STD-191	- Textile Test Methods

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage

(Copies of specification, standards, drawings, and publications required by contractor in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.)

2.2 Other publications The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issues in effect on date of invitation for bids or request for proposal shall apply.

Color Association of the United States, Inc.
DOD Standard Color Card of Official Standardized
Shades for Heraldic Yarns for Embroidery and Ribbons - 1974

(Copies of the standard noted above may be obtained from the Color Association of the United States, Inc., 24 East 38th St., New York, NY 10016).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations, Attn: Traffic Department, 1616 P Street, NW Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, ILL 60606.)

3. REQUIREMENTS

3.1 Guide sample Samples, when available, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article When specified (see 6.2), the contractor shall furnish a sample for first article inspection and approval.

3.3 Materials

3.3.1 Base cloth The cloth used for the sleeve insignia background and for the top covering of the shoulder boards shall conform to the requirements for Type III, class 3 of MIL-C-823. The color shall be Blue 3362.

3.3.2 Cloth, lining The cloth used for lining the underside of the shoulder boards shall conform to the requirements for Class 1, 2 or 3 of MIL-C-368. The color shall be Black or Blue 3351.

3.3.3 Lace, ornamental The lace used for striping shall conform to the requirements for type II, classes 1 thru 5, Style A or type II, classes 1 thru 5, Style B, sub-style B2, of MIL-L-17507.

3.3.4 Nylon braid The braid used for striping shall be 1/8 inch wide weighing 9.0 to 10.0 ounces per gross (144) yards. It shall be made of 2 ply mercerized cotton stuffer ends with an outer covering of nylon. The braid shall have one vellum consisting of 21 stuffer ends (minimum) with an additional 7 stuffer ends (minimum) on each side of the vellum. The outer covering shall completely cover the stuffer ends and shall be made with 8 carriers (minimum) with 2 ends of nylon per carrier. The braid shall be dyed to match Gold 3904 and shall show "good" fastness to light, crocking and wet-dry cleaning (see 4.3.1).

3.3.5 Embroidery materials The embroidery materials shall conform to Type III, classes 8 and 10 of MIL-E-17568.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

3.3.6 Thread, cotton The cotton sewing thread shall be unbleached, type IA1, ticket No. 40, 3-ply; shade gold shall be type IA3, ticket No. 40, 3 ply; and shade black shall be type IC2, ticket No. 00, 3 ply, conforming to the requirements of V-T-276. The black thread shall approximate the shade of the lining material and the gold thread shall approximate the shade of the gold lace. As an alternate, the black and gold threads may be cotton-covered polyester conforming to ticket number 50, 2 or 3 ply of MIL-T-43548.

3.3.7 Fiberboard The fiberboard base for the shoulder board shall be vulcanized fiber 0.060 (± 0.005) inch in thickness (see 4.3.1).

3.3.8 Buckram The buckram used to reinforce the back of embroidered insignia shall conform to type III, class 1 of CCC-C-438. The color shall be natural, bleached or black. Colorfastness requirements shall not apply.

3.3.9 Strap The attachment strap shall be full grained leather .090 to .110 inch thick or flexible vinyl sheet .050 to .060 inch thick. The color of the strap shall be black (see 4.3.1).

3.3.10 Button, snap fastener Snap fastener components shall be brass conforming to style 2A (MS 27981) of MIL-F-10884 with a bright brass finish. The diameter of the socket and stud/eyelet components shall be 27/64 inch.

3.3.11 Button cap The design, material, and finish requirements for the button cap shall conform to type I, style 5, class A of MIL-B-3461. The size of the button cap shall be 22 1/2 line.

3.3.12 Cement The cement used for adhering the top covering and lining materials to the fiberboard base shall be suitable for the purpose intended. (see 4.3.1).

3.4 Design The shoulder board shall be a curved pentagon shaped rigid fiberboard covered with cloth. A snap fastener type insignia button shall be affixed to the pointed end. A tapered attachment strap shall be secured to the underside at the squared end. The shoulder boards and background fabrics for the sleeve insignia shall be embroidered with the appropriate insignia design in pairs and, when applicable, shall be produced in lefts and rights.

3.4.1 Figures Figures are furnished for information purposes only. When inconsistencies exist between the written specification and the figures, the written specification shall govern. All measurements indicated on figures are in inches.

3.5 Construction of shoulder boards

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

3.5.1 Stitching operations Machine stitching shall have a minimum of 8 stitches per inch using stitch type 301 of FED-STD-751. Sufficient top covering cloth shall be allowed in all directions for turning under edges. Hand stitching used for attaching the rayon lining to the underside of the shoulder board shall be a minimum of 6 stitches per inch.

3.5.2 Patterns The patterns for the shoulder board shall be furnished by the contractor.

3.5.3 Lining preparation Fold under and cement edges of the rayon lining approximately 3/8 inch over edges of a piece of buckram or other suitable reinforcement material.

3.5.4 Strap attachment A strap made of one of the materials specified in 3.3.9 shall be centered between the sides of the prepared lining with the square end of strap parallel to and positioned 1/4 inch up from square end of lining. Stitch the square end of strap to lining with a 3/8 inch wide by 7/8 inch long box-stitch or cross-box-stitch. Position properly and attach the specified snap fastener stud to the narrow free end of tapered strap. Hand stitch all edges of preassembled lining to the underside of the shoulder board with a minimum of 6 stitches per inch. The strap shall lie flat when fastened. Cut edges of leather strap shall be stained black.

3.5.5 Fiberboard base The fiberboard base specified in 3.3.7 shall be cut to shape with overall dimensions slightly less than those of the finished covered board. A 1/4 inch diameter hole for placement of button/socket snap fastener shall be drilled in the fiberboard base with the center of the hole positioned 5/8 inch in from the pointed end and centered across the width of the base. Fold under and cement edges of top covering material a minimum of 1/4 inch over edges of fiberboard base.

3.5.6 Embroidered shoulder board insignia Embroidered insignia for shoulder boards shall be hand or machine stitched thru face side of the top covering cloth employing the applicable yarn specified in 3.3.5. The embroidered insignia shall conform, where available, to the Government approved guide sample (see 6.3). Embroidery shall be accomplished prior to the application of top covering cloth to fiberboard base. Sufficient top covering cloth shall be allowed in all directions for proper turn under and cementing.

3.5.7 Attachment of stripes The ends of lace striping on the shoulder boards shall be inserted under the folded edges of the lining. The edges of the lining shall be hand stitched to the top covering cloth and striping. The finished edges of the lining shall not extend beyond the finished outer edges of the top covering.

3.5.8 Attachment of snap fastener Attach metal insignia button snap fastener socket through top covering, the hole in fiberboard base and the lining of shoulder board. The strap shall lie flat along the board when fastener is closed. The eagle's head of the insignia button for the shoulder board shall face left when the shoulder board is viewed with the pointed end upwards.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

3.6 Dimensions The dimensions of the finished shoulder boards shall be as shown below and in applicable figures. All measurements are expressed in inches.

	Length			Curvature Height
	Overall	Peak	Width	at Center
Type I	5 1/2	1	2 1/4	1/4
Type II	5	1	2	3/16 to 1/4

3.6.1 Dimensional tolerances The tolerances for the finished shoulder boards shall be as follows:

Measurement	Tolerances in inches
Length of shoulder board	± 1/8
Width of shoulder board	± 1/16
Stripes	
Spacing between	± 1/16
Width	± 1/32
Embroidered design	
Overall size	± 1/16
Placement	± 1/16

3.7 Type I, class 1, shoulder board

3.7.1 Face The shoulder board shall consist of a 2 inch wide gold lace (see 3.3.3) superimposed and stitched vertically to the applicable background cloth (see 3.3.1), with one row of stitching along each edge and approximately 1/16 inch from the edge of the lace (see Figure 1).

3.7.1.1 Anchor and shield A silver fouled anchor and shield shall be embroidered on the gold lace and background cloth using materials specified in 3.3.5. Dimensions and location of the anchor and shield shall be as shown in Figure 1. Design of the anchor and shield shall be, when specified, in accordance with the guide sample. A 3/4 inch high by 3/4 inch wide Coast Guard shield shall be embroidered in silver on the shank portion of the anchor. Class 1 shoulder boards shall be supplied in lefts and rights. Figures 1 thru 3 show boards designated as "rights". The unfouled arm of the anchor shall point towards the front.

3.7.1.2 Star(s) Rank shall be designated by a 5 pointed star(s), embroidered with silver embroidery materials specified in 3.3.5. Design, dimensions and location of the star(s) shall be as shown in Figures 2 and 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

3.8 Type I, Class 2 shoulder boards

3.8.1 Face The shoulder board shall be covered with the applicable background cloth specified in 3.3.1.

3.8.2 Rank (Stripes) The gold lace stripes (see 3.3.3) shall be superimposed on the background cloth. The stripes shall be cut of sufficient length to overlap the backside of the board and be caught in the lining stitching and covered by the lining. The position, number, width, and spacing of stripes shall be as shown in Figures 4, 5, and 6.

3.8.3 Shield A 1 inch high by 13/16 inch wide Coast Guard shield shall be hand embroidered in gold 1/4 inch above the gold lace striping.

3.9 Type I, Class 3 shoulder board

3.9.1 Face The shoulder board shall be covered with the applicable background cloth specified in 3.3.1.

3.9.2 Stripe A single stripe of gold and blue lace shall be superimposed on the background cloth. The stripes shall be cut of sufficient length to overlap the backside of the board and be caught by the lining stitching and be covered by the lining. The lace shall conform to Type II, Classes 1, 2, 3, 4 or 5, Style B, substyle B2 of MIL-L-17507. Position, width, and number of blue color breaks of the lace shall be as shown in Figure 7.

3.9.3 Shield and specialty insignia A 1 inch high by 13/16 inch wide Coast Guard shield hand embroidered in gold shall be placed 1/4 inch above the gold lace stripe. The embroidered specialty insignia shall be placed 1/4 inch above the shield. The bottom point of shield shall face towards the stripe (see figure 7). The size of the specialty insignia shall be as shown in figures 14 and 15.

3.10 Type II, Class 4 shoulder boards

3.10.1 Face The shoulder board shall be covered with the applicable background cloth specified in 3.3.1.

3.10.2 Shield A 3/4 inch high by 3/4 inch wide Coast Guard shield shall be hand embroidered in gold with the lower pointed end of shield positioned as indicated on figures 8 thru 12.

3.10.3 Stripes Stripes shall be of the braid material specified in 3.3.4 and shall be superimposed on the background cloth. The braid shall be cut of sufficient length to overlap the backside of the board and be caught in the lining stitching and covered by the lining. The number, location, and arrangement of stripes shall be as shown in Figures 8 thru 12.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

3.11 Type II, Class 5 shoulder board

3.11.1 Face The shoulder board shall be covered with the applicable background cloth specified in 3.3.1.

3.11.2 Shield The Coast Guard shield shall be hand embroidered in the gold materials specified in 3.3.5. The bottom pointed end of a 1 inch high by 13/16 inch wide shield shall be placed 1 1/4 inches from the squared end (see figure 13).

3.12 Type III, embroidered sleeve insignia

3.12.1 Embroidery Embroidered sleeve insignia, except Coast Guard shield, shall be hand or machine stitched to the applicable background cloth specified in 3.3.1 using the applicable yarn specified in 3.3.5. The finished embroidered design shall conform, when available, to the Government approved guide sample (6.3) The finished height and width measurements for the embroidered design itself shall be as indicated in figures 14 and 15. The Coast Guard shield shall be hand embroidered only.

3.12.2 Spacing All embroidered sleeve insignia covered by this specification shall be properly centered on the cloth patch. There shall be a minimum of 1/4 inch between the outer edges of the embroidered design and the folded edge of the finished cloth patch. Unless otherwise specified, a minimum of 1 inch shall be allowed between the outer edges of the embroidered design and the cut edges for hemming purposes.

3.13 Workmanship The finished shoulder boards and sleeve insignia shall conform to the quality established by the specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection Unless otherwise specified in the contract or order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification (see 4.3.1).

4.2 First article inspection The first article, submitted in accordance with 3.2, shall be inspected as specified in 4.3.3 for compliance with design, construction, workmanship and dimensional requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

4.3 Inspection Inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated herein.

4.3.1 Component and material inspection In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. Unless otherwise specified, a certificate of compliance shall be submitted for the requirements of 3.3.4 Nylon braid; 3.3.7 Fiberboard; 3.3.9 Strap; and 3.3.12 Cement.

4.3.2 Examination of the end item Examination of the end item shall be in accordance with 4.3.2.1 and 4.3.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.3.2.3. The sample unit shall be one finished pair (left and right) of shoulder boards or one finished insignia sleeve patch. The lot size shall be expressed in units of pairs of shoulder boards or one sleeve insignia patch.

4.3.2.1 Visual examination The shoulder boards and sleeve insignia shall be examined for defects in color, design, material, construction, workmanship, and the defects classified in accordance with Table I.

Table I - Classification of defects

Examine		Defect	Classification Major	Minor
Fabric	1.	Hole, cut, tear, or misweave	X	
	2.	Color or material not as specified	X	
	3.	Spot or stain		X
Top Covering		Covering not cemented to fiber-board base		X
Stripes (lace and braid)	1.	Any scuffed or abraded area	X	
	2.	Stain or spot		X
	3.	Type, color or pattern not as specified	X	
	4.	Spacing or number of stripes not as specified	X	
	5.	Incorrect width		X
	6.	Material not as specified		X
Strap	1.	Missing	X	
	2.	Wrong shape		X
	3.	Dimensions of strap not as specified		X
	4.	Snap fastener stud missing	X	
	5.	Strap does not lie flat in closed position		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

Table I - Classification of defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Strap (cont'd)	6. Strap not stitched to lining as specified		X
	7. Strap not centered	X	
	8. Any cut or deep scratch		X
	9. Cut edges not stained (when applicable)		X
	10. Not specified thickness		X
Button and snap fastener	1. Style, type or size not as specified	X	
	2. Not facing direction specified		X
	3. Any part missing or discolored	X	
	4. Scratched or dented		X
	5. Snap does not align with socket on board	X	
	6. Does not function properly	X	
Embroidered design	1. Any deviation from guide sample	X	
	2. Any design incorrect or missing	X	
	3. Poorly defined, distorted or misshaped	X	
	4. Unrelated colors or yarn visible on face		X
	5. Surface yarns loose, tight or shifted	X	
	6. Bunched, kinked or tangled yarns on face	X	
	7. Finished height or width of design not as specified		X
	8. Edge of design less than 1/4 inch from finished folded edge of cloth patch		X
	9. Placement of star, anchor or device not as specified		X
	10. Wrong combination of stars, stripes, anchor, and specialty	X	
Stitching	1. Any component part not securely attached or stitched		X
	2. Hand stitching, one stitch per inch less than specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

Table I - Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Stitching (cont'd)	3. Machine stitching:		
	(a) -two stitches per inch less than specified		X
	(b) -more than 2 stitches per inch less than specified	X	
	4. Broken or missing stitches		X
	5. Loose or tight tension, affecting appearance	X	
	6. Stitch lines crooked or irregular, affecting appearance		X
	7. Thread not a good match to fabric or gold lace		X
	8. Stitching runoff		X

4.3.3.2 Dimensional and pairing examination The pairs of shoulder boards and sleeve insignia shall be examined for defects in accordance with the following:

(a) Any measurement deviating from the nominal dimensions and tolerances specified for the finished shoulder board and sleeve insignia in 3.6.1 and applicable figure shall be scored as a defect.

(b) Any pair of shoulder boards or sleeve insignia not furnished with one "right" and one "left", when applicable, shall be scored as a defect.

(c) A poor color match of synthetic metallic yarn between paired shoulder boards or paired sleeve insignia shall be scored as a defect.

4.3.3.3 Inspection levels and acceptable quality levels The inspection levels and acceptable quality levels (AQL's) expressed in defects per 100 units, for visual, dimensional, and pairing examinations shall be as follows:

	Inspection Level	AQL Major	Total
For visual examination in 4.3.3.1	II	2.5	6.5
For dimensional examination in 4.3.3.2	S-1	(one class)	6.5
For pairing examination in 4.3.3.2	S-4	(one class)	1.5

5. PACKAGING

5.1 Packaging Packaging shall be level A or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

5.1.1 Level A Each pair of shoulder boards and each pair of sleeve insignia shall be placed in a close fitting flat style clear polyethylene film bag. All seams and closures shall be effected by heat sealing. Excess air shall be removed from each bag before the final closure. Each sealed bag, containing a pair of shoulder boards shall then be packaged in a commercial grade tuck end type folding paperboard box. The outside of each shoulder board box shall measure approximately 5 3/4 inches long by 2 5/8 inches wide by 1 1/4 inches in depth. The sleeve insignia patches do not require packaging in a paperboard box.

5.1.2 Level C (Commercial packaging) Each pair of shoulder boards and each pair of sleeve insignia shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing Packing shall be level A or C, as specified (see 6.2).

5.2.1 Level A Shoulder boards and sleeve insignia packaged as specified in 5.1 shall be packed as specified by the procuring activity.

5.2.2 Level C (Commercial packing) Shoulder boards and sleeve insignia packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping contianer shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking Unless othewise specified, marking shall be as specified by the procuring activity or in accordance with the contractor's standard commercial practice.

6. NOTES

6.1 Intended use The shoulder boards and sleeve insignia covered by this specification are intended for wear by Coast Guard personnel.

6.2 Ordering data Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Type and class required (see 1.2).
c. Whether first article sample is required (see 3.2).
d. Levels of packaging and packing required. (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

6.3 Guide samples For access to approved guide samples address the procuring activity issuing the invitation for bids or Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760.

Custodian:
Navy - NU

Review Activity:
DLA - CT

User Activity:
Navy - CG

Preparing Activity:
Navy - NU

Project No. 8455-N944

☆ U.S. GOVERNMENT PRINTING OFFICE: 1981—703-023/3312

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

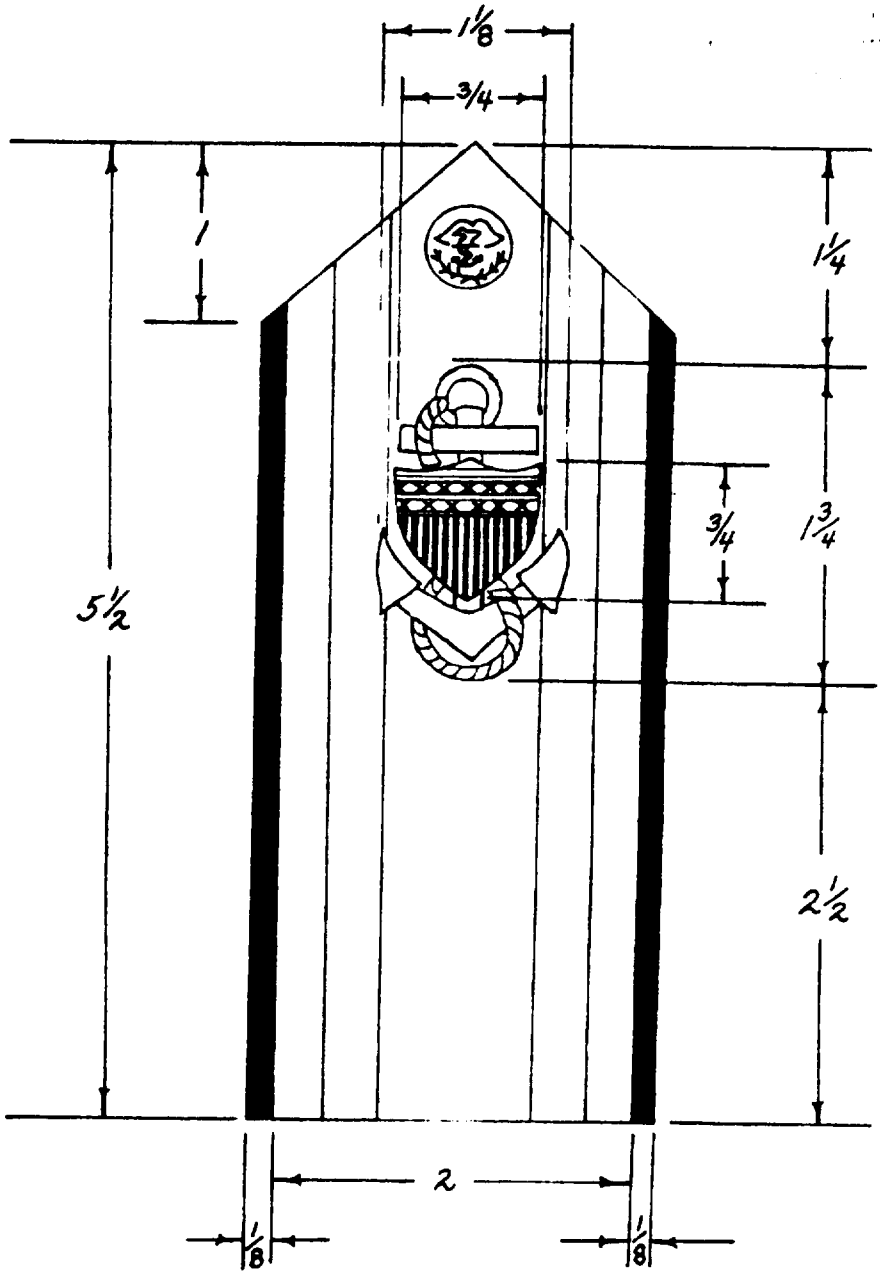


FIG. 1 - SHOULDER BOARDS, FLAG OFFICERS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

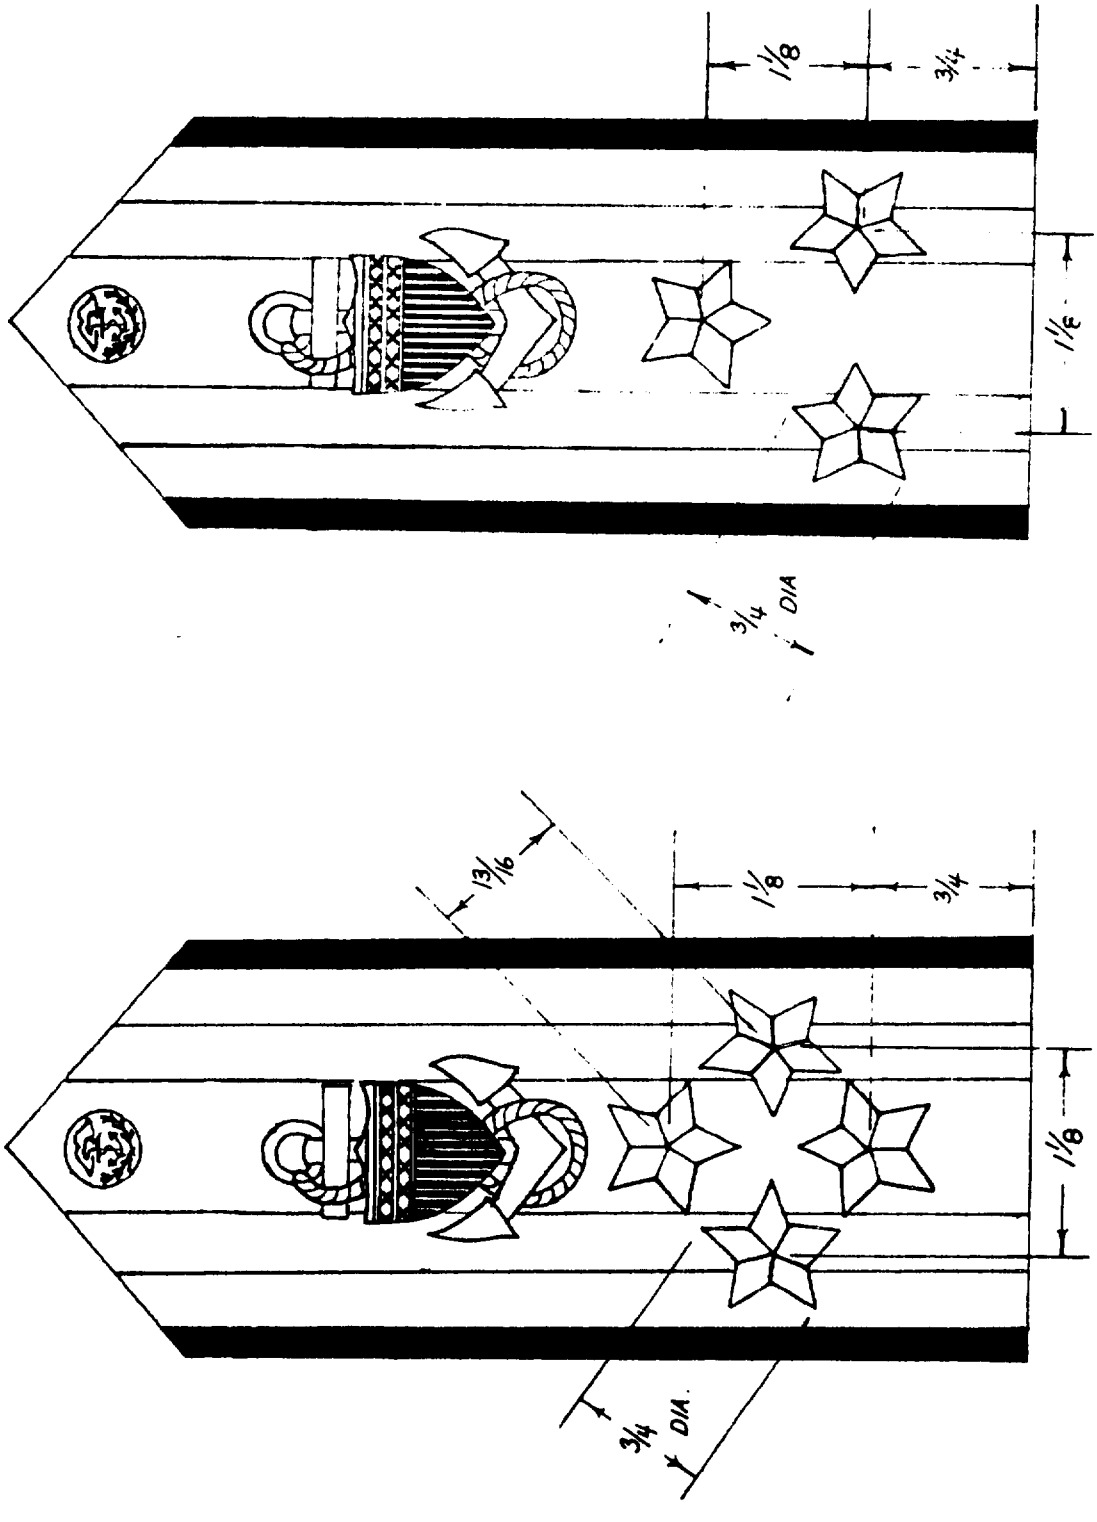


FIG. 2 - SHOULDER BOARDS, FLAG OFFICERS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

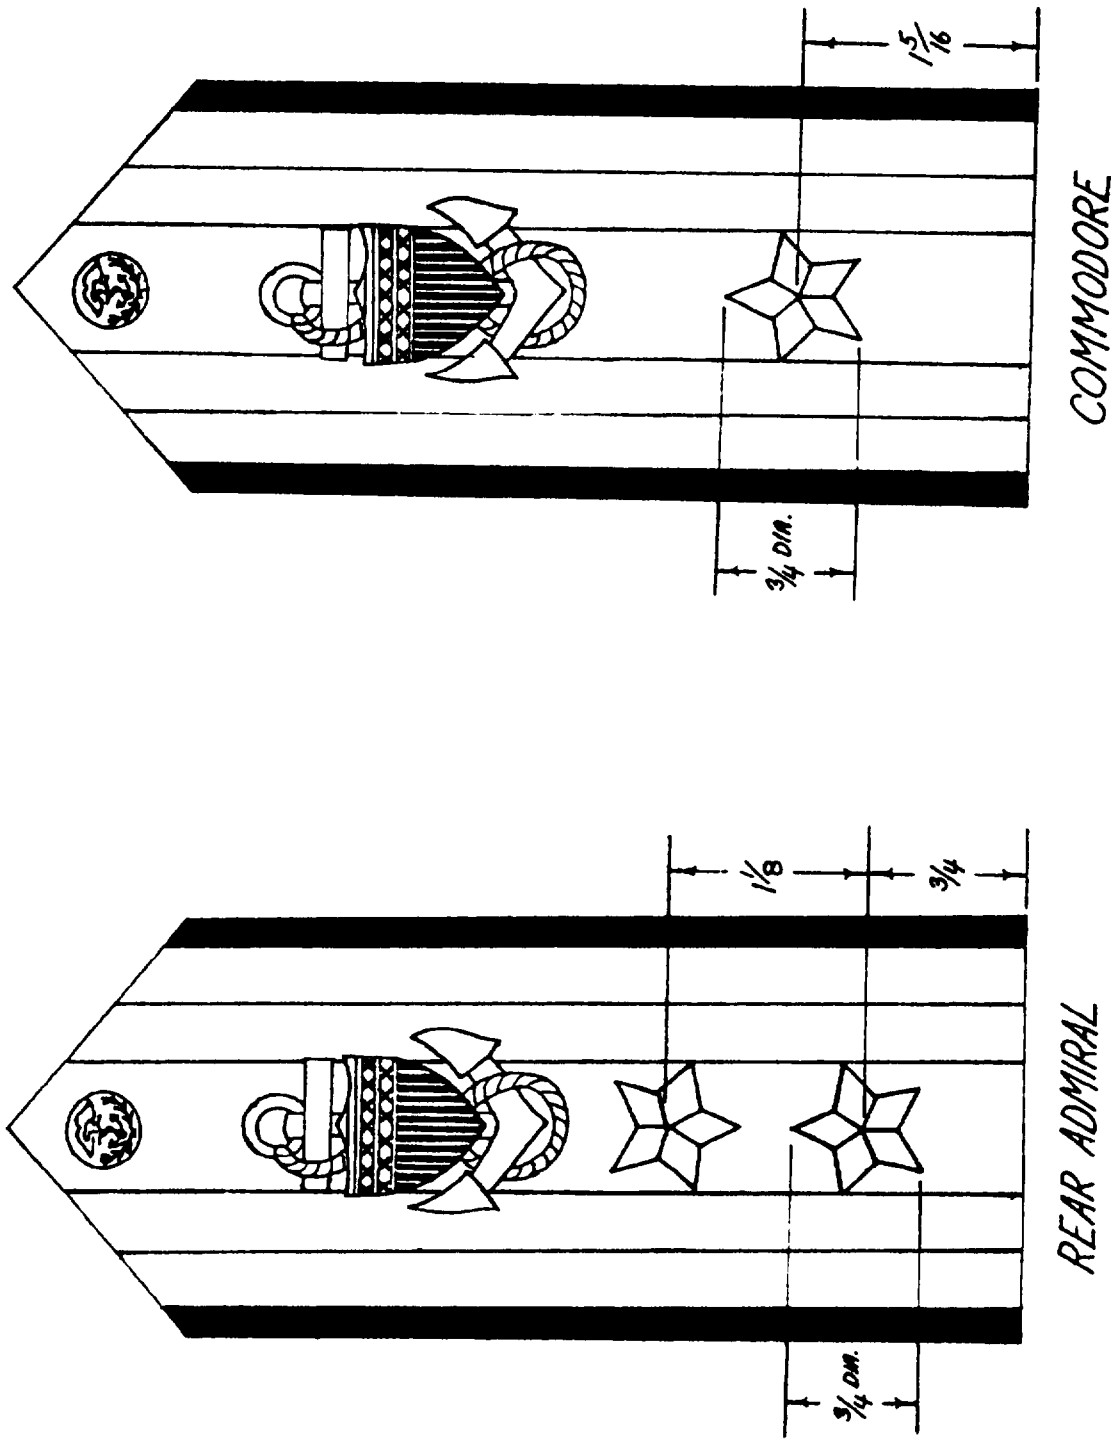


FIG. 3 - SHOULDER BOARDS, FLAG OFFICERS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

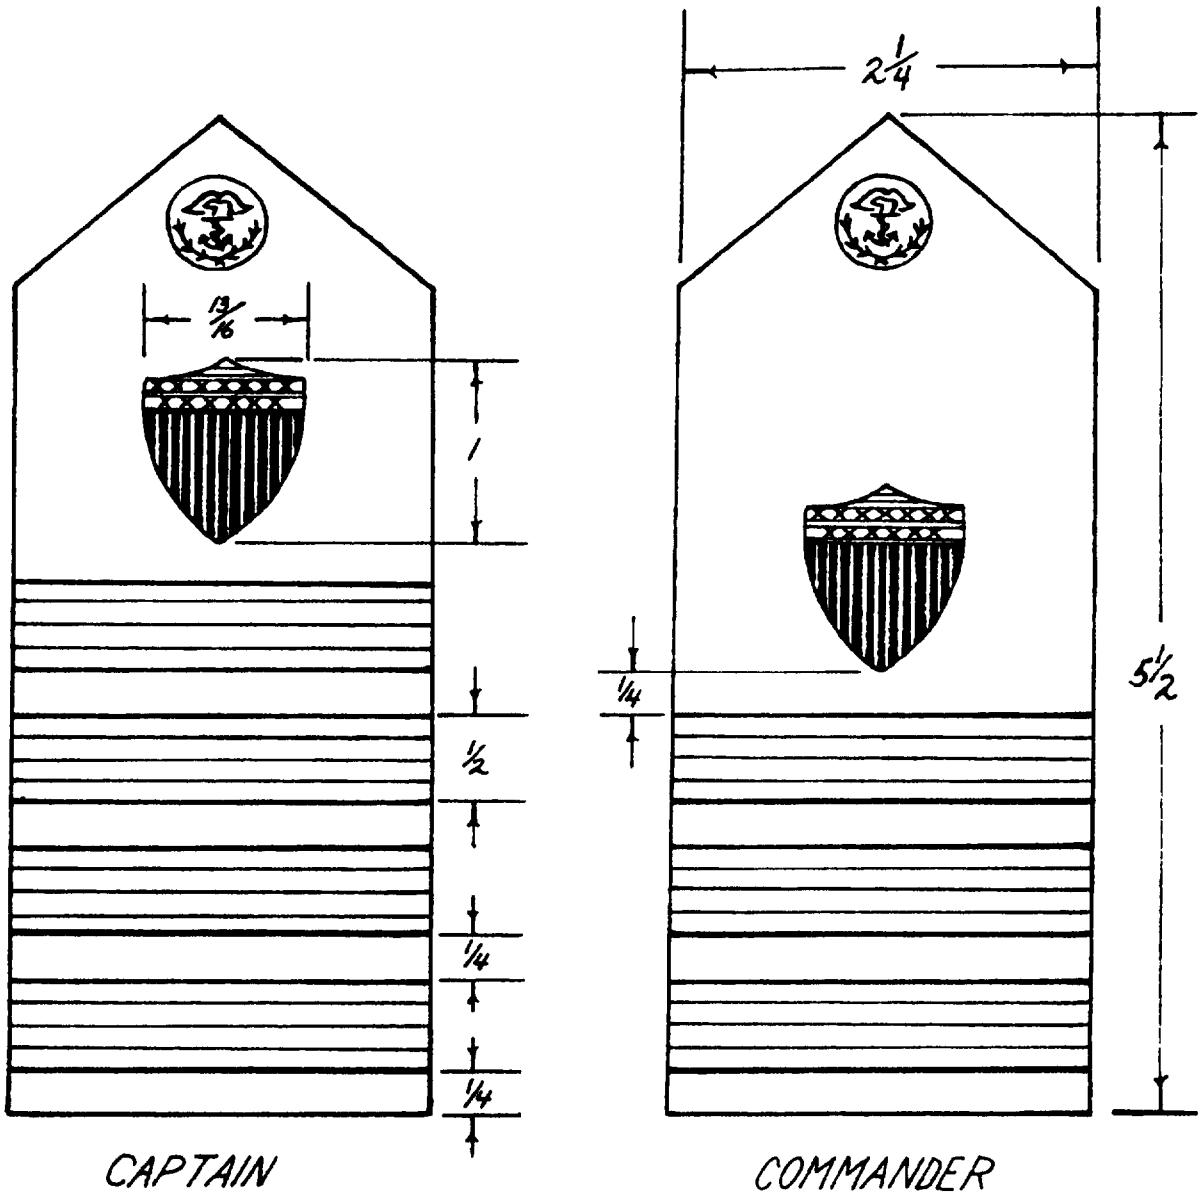


FIG. 4 - SHOULDER BOARDS, OFFICERS BELOW FLAG RANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

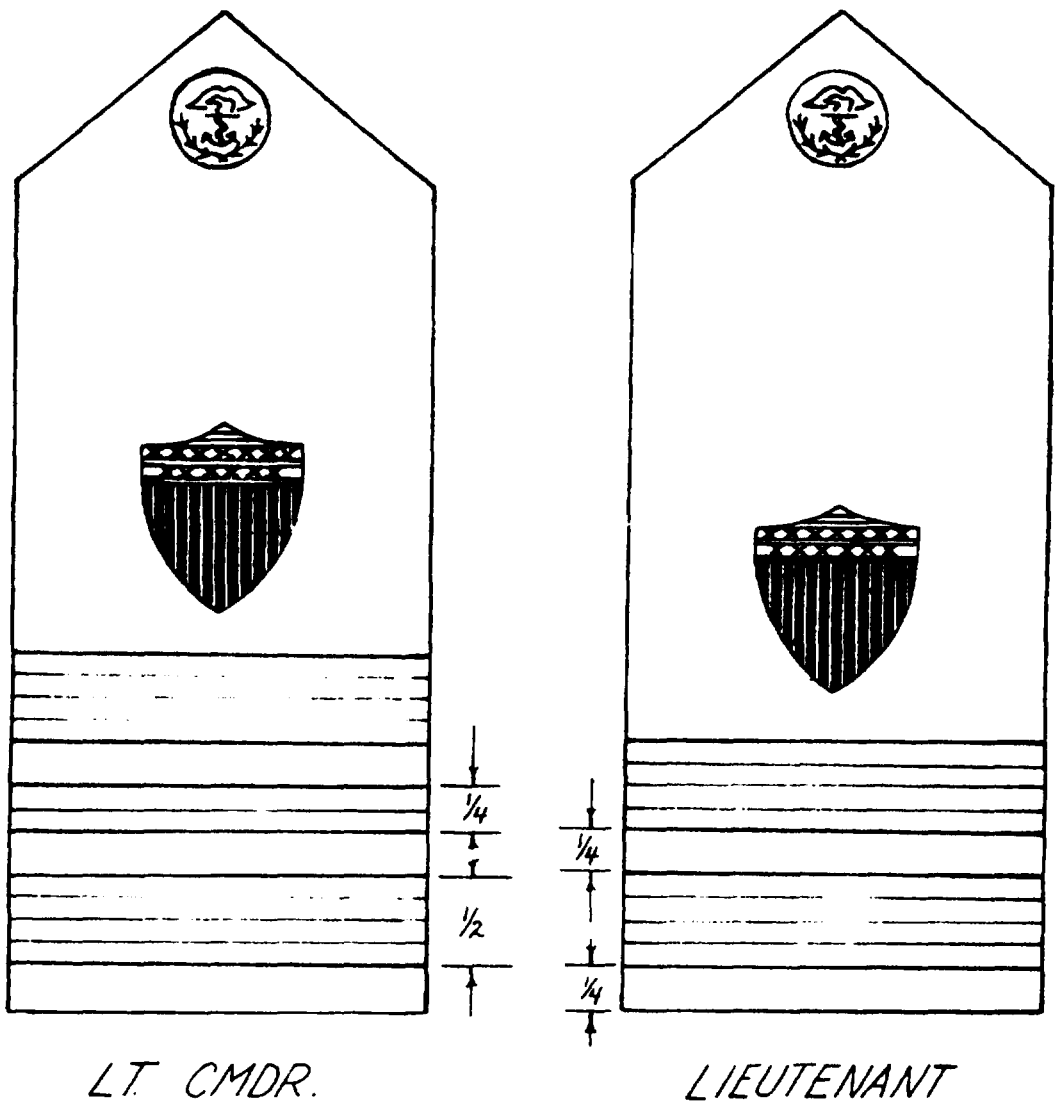


FIG. 5-SHOULDER BOARDS, OFFICERS BELOW FLAG RANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

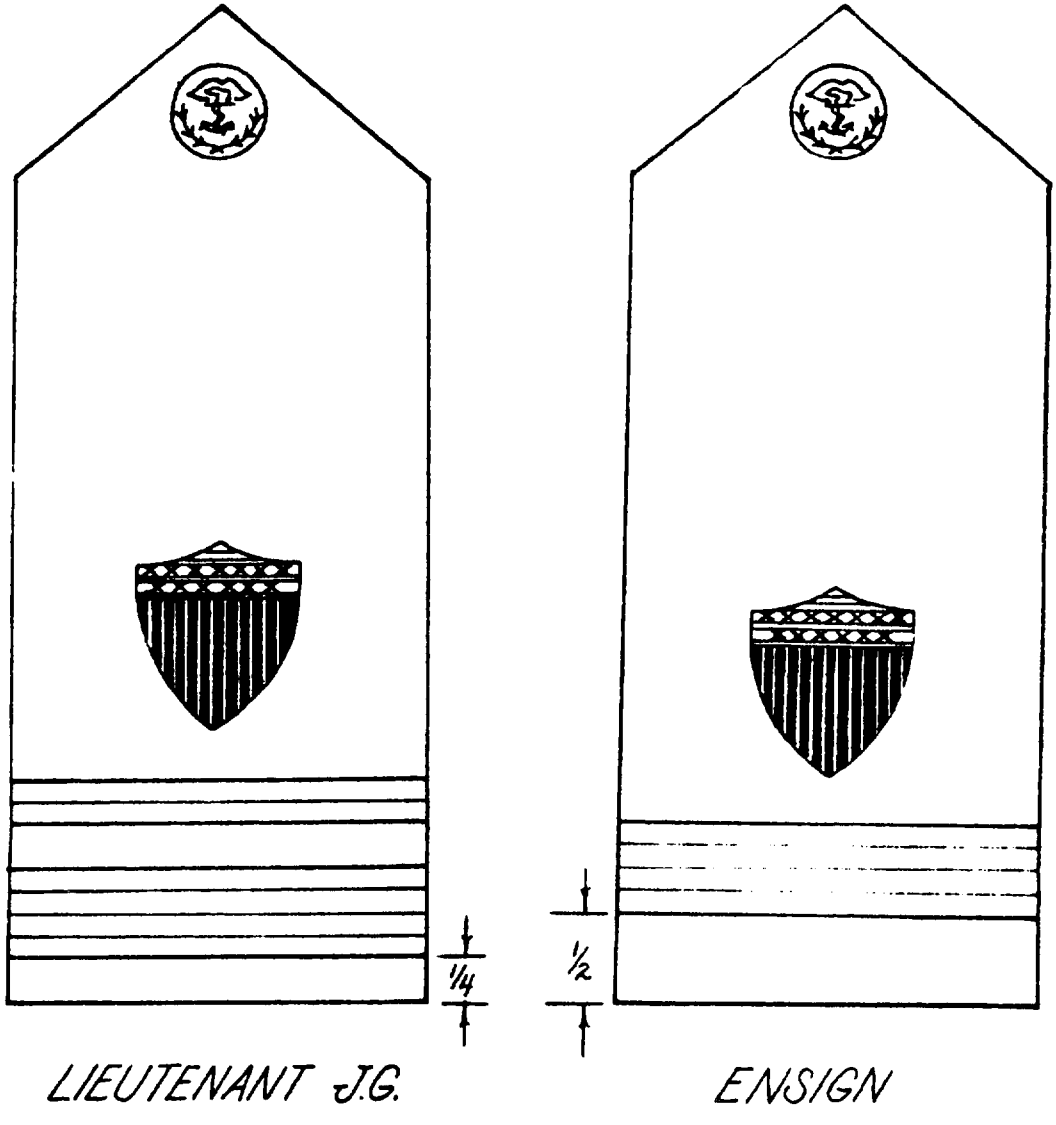


FIG. 6 - SHOULDER BOARDS, OFFICERS BELOW FLAG RANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

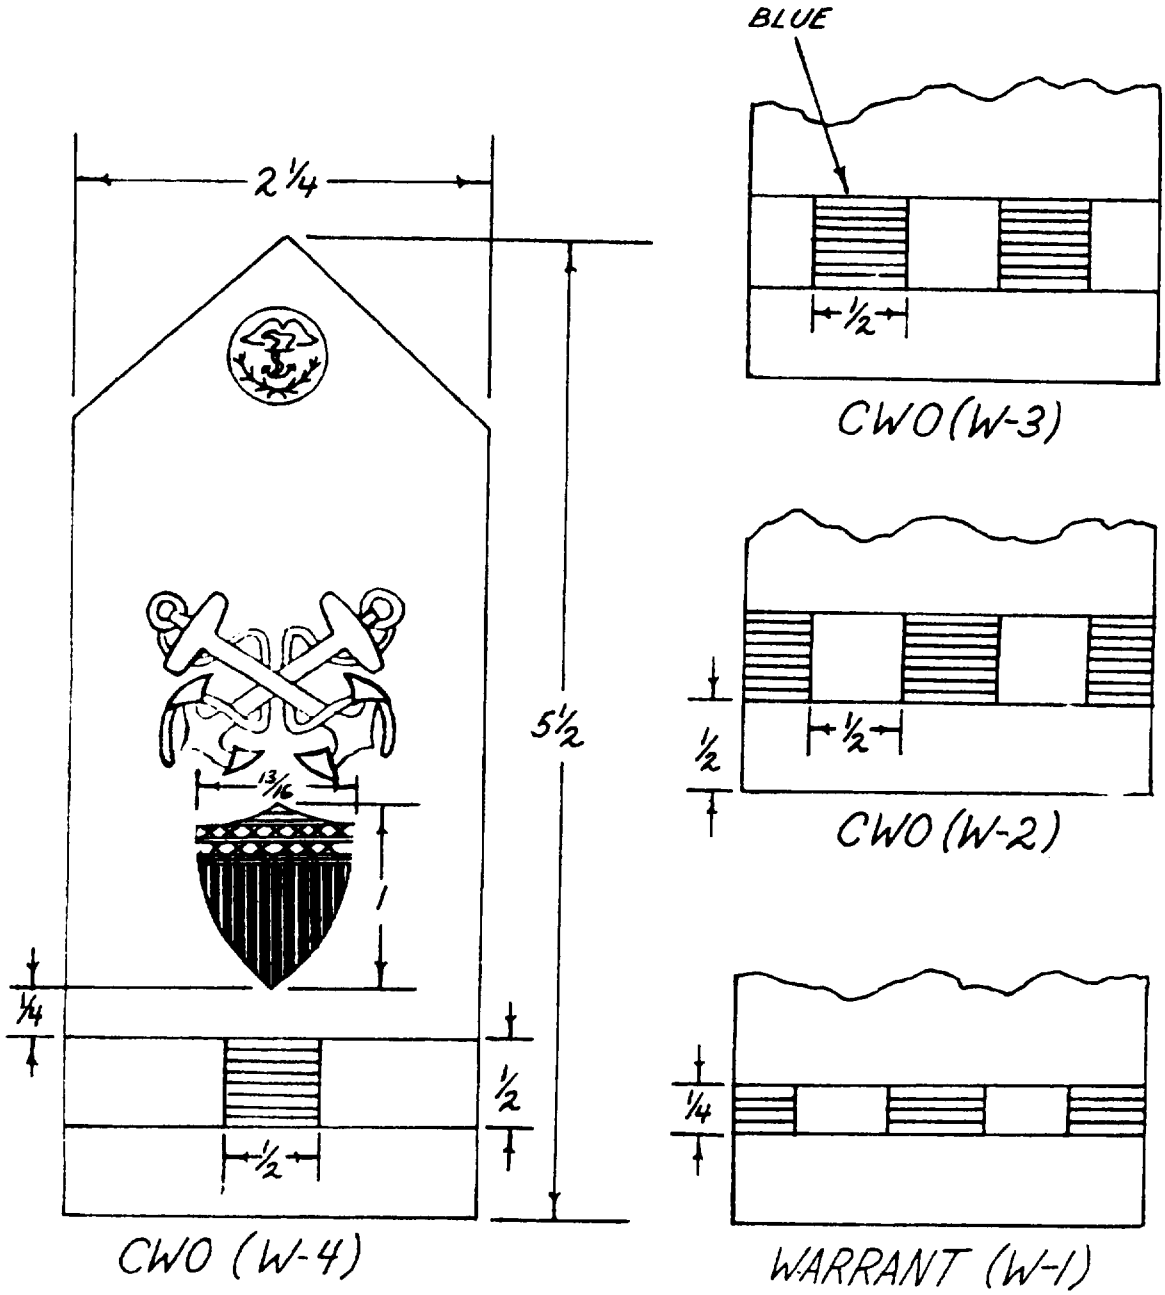


FIG. 7- SHOULDER BOARDS, CHIEF WARRANT AND WARRANT OFFICER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

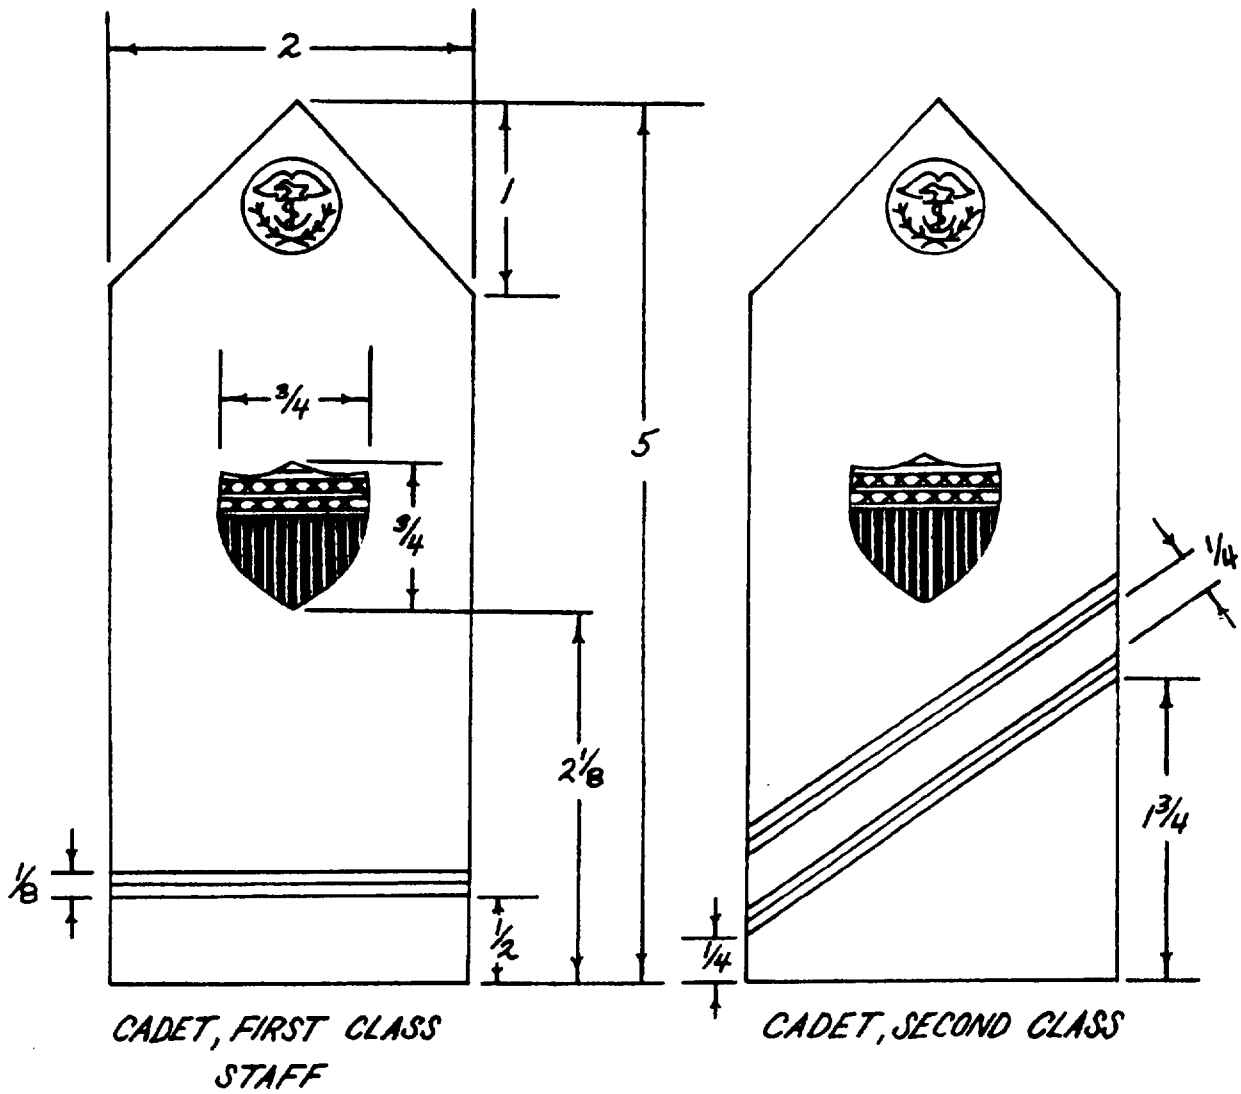


FIG. 8 -SHOULDER BOARDS, COAST GUARD ACADEMY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

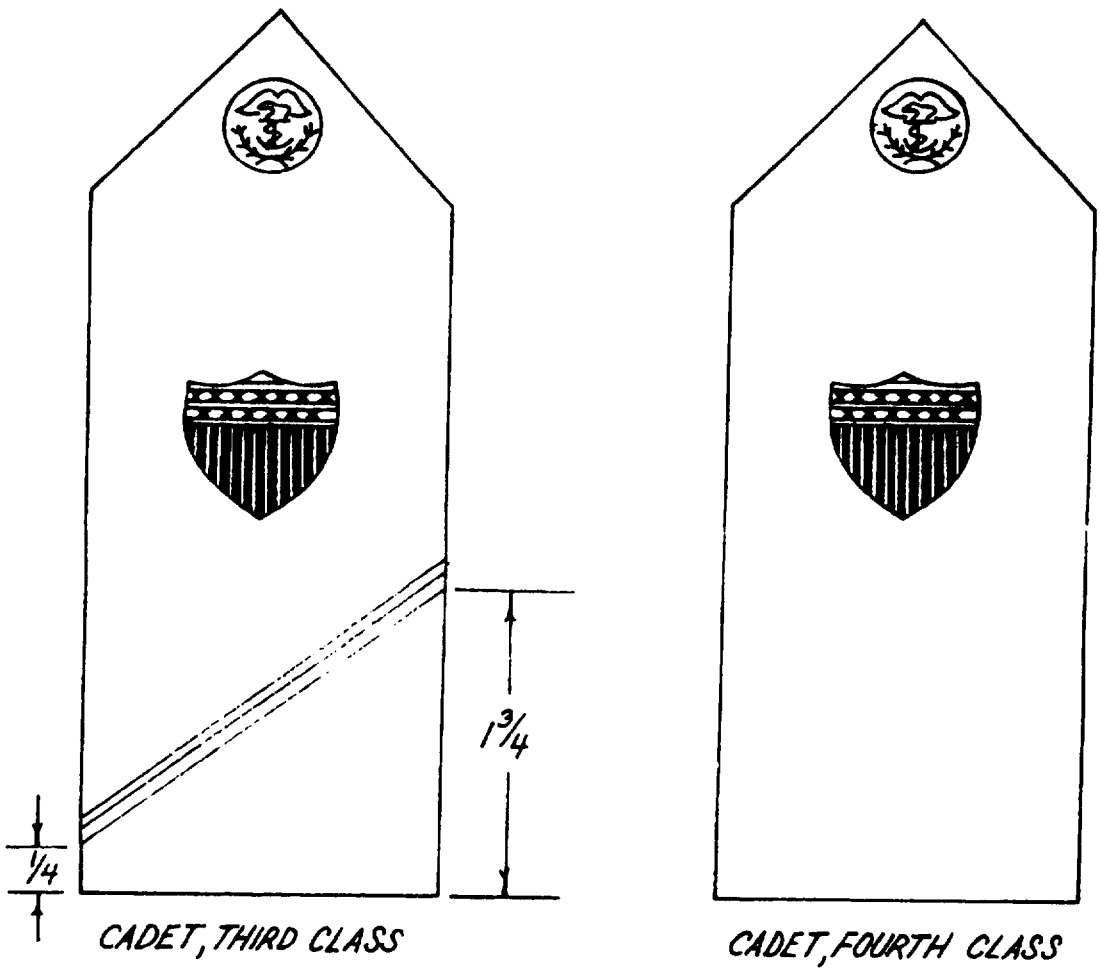


FIG. 9 - SHOULDER BOARDS, COAST GUARD ACADEMY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

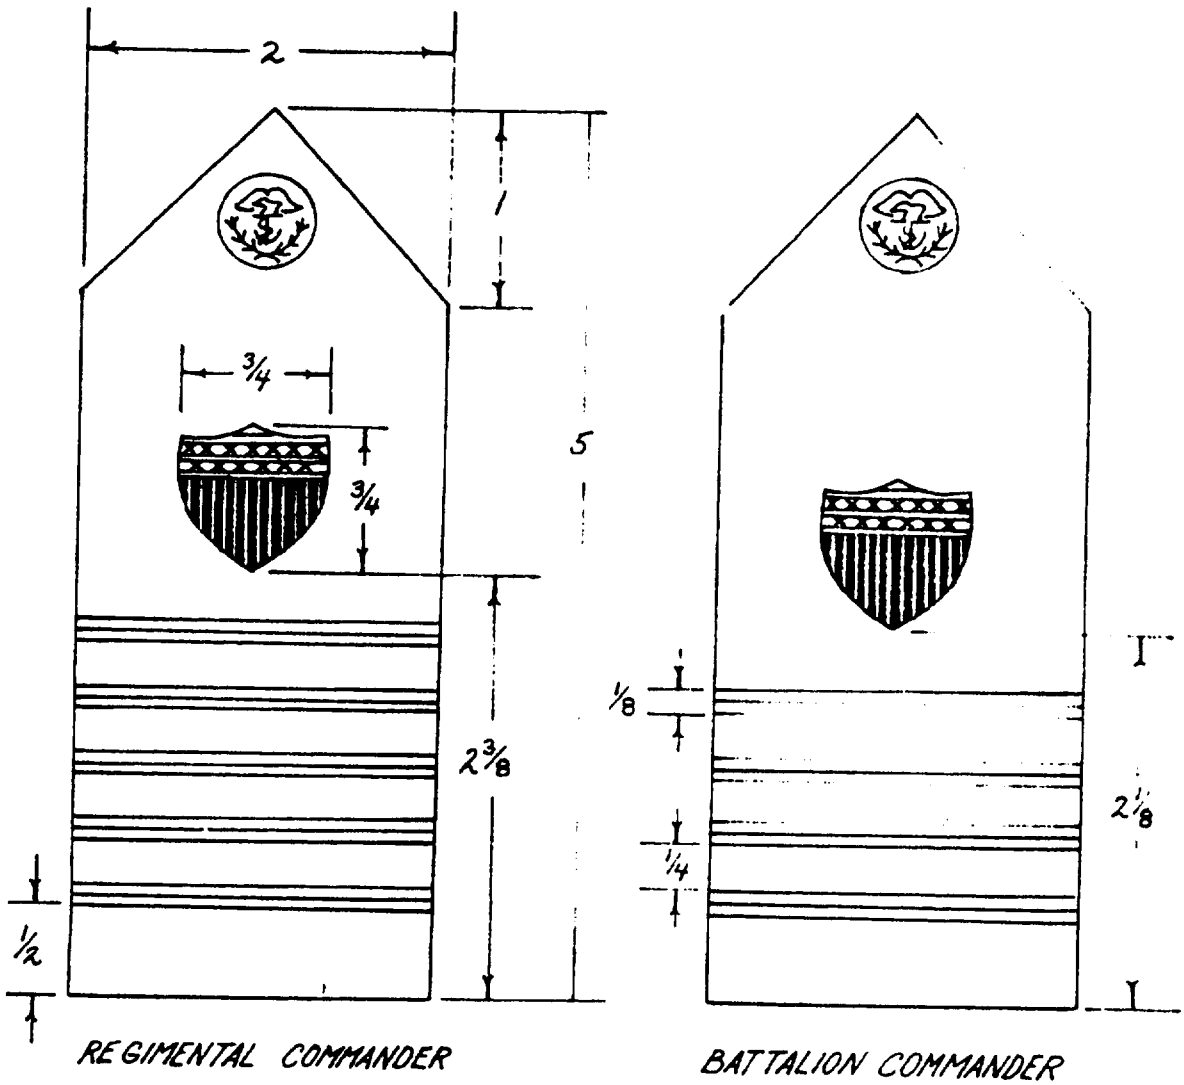


FIG. 10 - SHOULDER BOARDS, COAST GUARD ACADEMY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

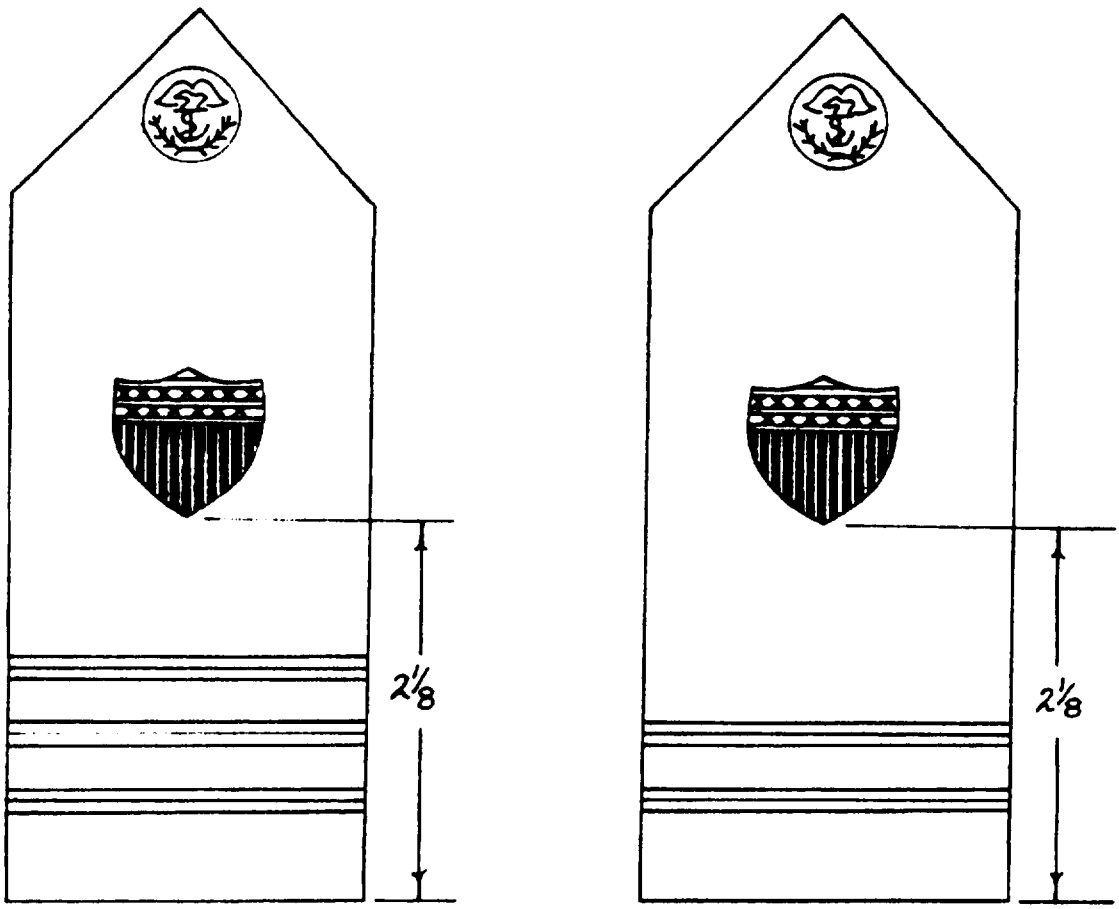


FIG. 11 - SHOULDER BOARDS, COAST GUARD ACADEMY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

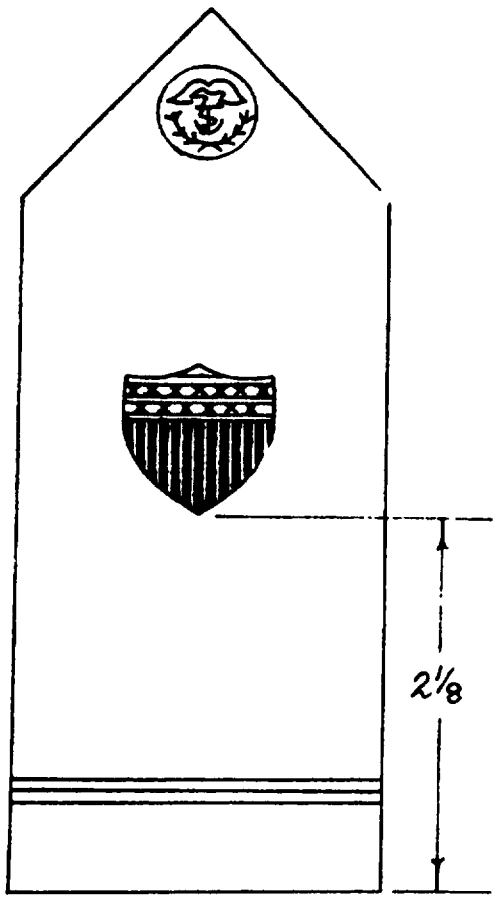


FIG. 12- SHOULDER BOARDS, COAST GUARD ACADEMY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.



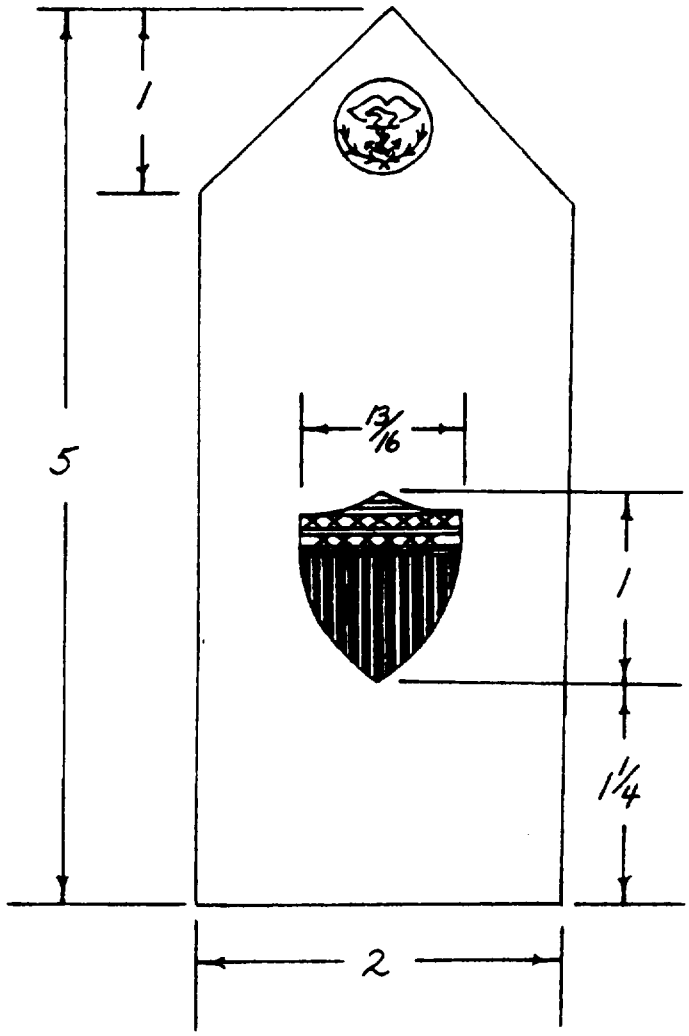


FIG. 13 - SHOULDER BOARDS, COAST GUARD OFFICER CANDIDATES


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

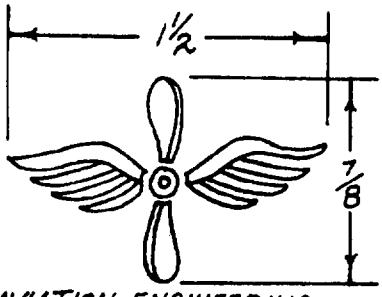


AVIATION ENGINEERING




ELECTRONICS *

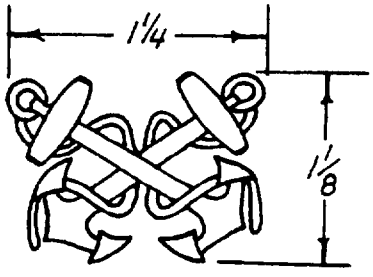


BOATSWAIN

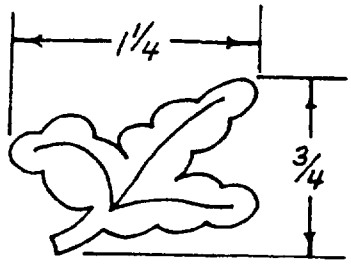


FINANCE AND SUPPLY *




BANDMASTER



MATERIAL MAINTENANCE *

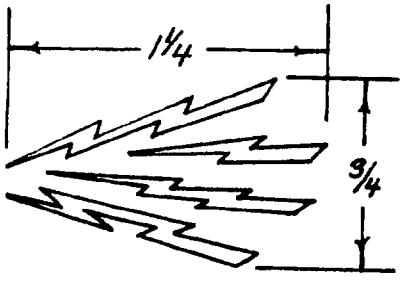

COMMUNICATIONS *

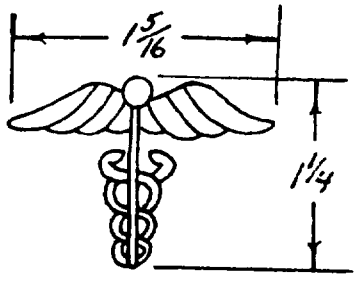


MEDICAL ADMINISTRATION


* RIGHTS AND LEFTS

FIG. 14 - SHOULDER BOARD AND SLEEVE INSIGNIA


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.




NAVAL ENGINEERING




SHIELD



PUBLIC INFORMATION *



PERSONNEL ADMINISTRATION



WEAPONS

* RIGHTS AND LEFTS

FIG. 15 - SHOULDER BOARD AND SLEEVE INSIGNIA

Source: https://assist.dla.mil Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-S-87096(NU) Shoulder Boards and Sleeve Insignia (Coast Guard)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge (CODE 50)
Navy Clothing & Textile Rsch Facility
21 Strathmore Road
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:44Z
Check the source to verify that this is the current version before use.