MILITARY SPECIFICATION

TRANSMITTING SET, TELEMETRIC DATA AN/DKT-49(XN-1), AN/DKT-49(XN-2), AND AN/DKT-49A

This specification is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the requirements for the manufacture and acceptance of the Telemetric Data Transmitting Set AN/DKT-49 (XN-1), AN/DKT-49(XN-2), and AN/DKT-49A, herein referred to as the "assembly."

1.2 Classification. Assemblies consist of the following types, as specified (see 6.2.1b):

Type I: AN/DKT-49(XN-1) manufactured in accordance with Drawing 917AS6400 and AN/DKT-49(XN-2) manufactured in accordance with Drawing 917AS8200.

Type II: AN/DKT-49A manufactured in accordance with Drawing 917AS8845.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer, Naval Air Engineering Center, Systems Engineering and Standardization Department (SESD), Code 93, Lakehurst, NJ 08733, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 1420

"DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

PPP-B-601	Boxes, Wood, Cleated-Plywood

MILITARY

MIL-P-116	Preservation, Methods of

STANDARDS

MILITARY

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-454	Standard General Requirements for Electronic Equipment
MIL-STD-45662	Calibration Systems Requirements

2.1.2 Other Government documents, drawings, and publications. The following Government drawings and publications form a part of this specification to the extent specified herein.

DRAWINGS

NAVAL AIR SYSTEMS COMMAND
(Code Ident 30003)

917AS6400	Transmitting Set, Telemetric Data AN/DKT-49(XN-1)
917AS6626	Signature Characteristics
917AS8200	Transmitting Set, Telemetric Data AN/DKT-49(XN-2)
917AS8845	Transmitting Set, Telemetric Data AN/DKT-49A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

PUBLICATIONS

NAVAL AIR SYSTEMS COMMAND
(Code Ident 30003)

WS-6536 Procedures and Requirements for Preparation for Soldering of Electrical Connections

(Copies of specifications, standards, drawings, and publications required by manufacturers in connection with specified acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Assembly description. The assembly shall consist of two individual electronics packages, each frequency modulating a separate transmitter, but with a common power supply (either three-phase alternating current (ac) or battery). Radio frequency (RF) output power shall be not less than two watts (W) per transmitter into an approximately omnidirectional antenna. The pulse code modulation (PCM) system shall be a time division multiplex digital system with a frame length of 384 eight-bit words at a bit rate of 768 ±8 kilobits per second (kb/s) in a nonreturn to zero level (NRZ-L) format. Prior to being applied to the transmitter, the PCM signal shall be filtered through a low pass Bessel filter in order to minimize RF bandwidth. The seeker wide-band intermediate frequency (IF) shall be down converted to baseband by the wide-band video converter unit (WVCU) and this baseband signal shall modulate the second transmitter under normal post launch conditions. Prior to launch, a switch within the WVCU shall select injected video and input that signal (instead of converted IF) into the second transmitter. When specified in the contract or purchase order (see 6.2.1c), the assembly shall include a transponder with pulse-spaced coding for ground tracking.

3.2 Characteristics.

3.2.1 Electrical performance. Electrical performance shall be as specified herein. The following cautions shall apply:

a. The assembly contains a squib-activated battery which may be activated if excessive current is applied to the squib contacts W11P35-37 and W11P35-19. Activation of the battery shall require replacement of the battery since it is a one-shot device.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

b. Care shall be exercised not to expose test or assembly personnel to excessive radiation levels. Radiation levels 2.5 meters from the antenna are not greater than 10 microwatts per centimeter squared (uW/cm^2).

c. ON time shall be not greater than 30 minutes. A two minute OFF time for every one minute ON time at room ambient temperature (15.6 degrees Celsius (°C) to 21.1° C) shall be allowed before reapplication of power.

d. The power of 4.6.8.4 shall be applied for not greater than 30 seconds (s) with not less than one minute between applications.

3.2.1.1 Power logic.

3.2.1.1.1 Seeker power. Contacts W11P34-9, W11P34-28, and W11P34-29 shall draw +0.5 ±0.2 amperes direct current (Adc), 250 ±50 milliamperes direct current (mAdc), and 75 ±30 mAdc, respectively.

3.2.1.1.2 Aircraft power. Contacts W11P34-6, W11P34-7, and W11P34-25 shall draw 350 ±100 milliamperes root mean square (mArms), 1.3 ±0.2 amperes root mean square (Arms), and 350 ±100 mArms, respectively. Following warm-up time of not greater than 120 s the current at contact W11P34-7 shall be 350 ±100 mArms.

3.2.1.1.3 Battery simulation. Contact W11P35-25 shall draw 3.50 ±0.70 Adc.

3.2.1.1.4 +26.5 volt direct current (Vdc) test. Contacts R2-2 and R3-2 together shall draw 6.5 ±0.7 Adc.

3.2.1.1.5 Squib resistance. The squib resistance between contacts W11P35-19 and W11P35-37 shall be 3.0 ±2.0 ohms.

3.2.1.2 Transmitters.

3.2.1.2.1 RF output power. RF output power shall be not less than two W per transmitter into an approximately omnidirectional antenna.

3.2.1.2.2 PCM transmitter center frequency. The PCM transmitter center frequency for each type shall be as specified in Table I.

3.2.1.2.3 PCM transmitter deviation. The PCM transmitter deviation shall be 550 ±150 kilohertz (kHz) peak-to-peak (p-p).

3.2.1.2.4 WVCU transmitter center frequency. The WVCU transmitter center frequency shall be as specified in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

TABLE I. Transmitter frequencies.

Assembly part number		Transmitter center frequency (MHz 1/ ±0.003 percent)	
Drawing number	Dash number	WVCU	PCM
917AS6400	-1	2204.5	2258.5
917AS8200	-1	2204.5	2258.5
917AS8200	-5	2204.5	2258.5
917AS8845	-1	2204.5	2258.5
917AS6400	-2	2216.5	2267.5
917AS8200	-2	2216.5	2267.5
917AS8200	-6	2216.5	2267.5
917AS8845	-2	2216.5	2267.5
917AS6400	-3	2231.5	2276.5
917AS8200	-3	2231.5	2276.5
917AS8200	-7	2231.5	2276.5
917AS8845	-3	2231.5	2276.5
917AS6400	-4	2240.5	2285.5
917AS8200	-4	2240.5	2285.5
917AS8200	-8	2240.5	2285.5
917AS8845	-4	2240.5	2285.5

1/ Megahertz (MHz)

3.2.1.2.5 WVCU transmitter deviation. The WVCU transmitter deviation shall be 550 ±150 kHz p-p.

3.2.1.3 PCM output.

3.2.1.3.1 PCM bit rate. The PCM bit rate shall be 768 ±8 kb/s.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

3.2.1.3.2 PCM synchronization words. The PCM output shall consist of 384 eight-bit words. Three eight-bit words shall be PCM synchronization words and shall form the following pattern of 24 bits:

First Last
111110101111001100100000

3.2.1.3.3 PCM frame format. The PCM frame output shall have the format specified in Table II, with PCM word one being that word immediately following the PCM synchronization words. The contents of the words as specified in Table II shall have the corresponding PCM output as specified in Table III.

3.2.1.3.4 Crosstalk PCM word pairs. Crosstalk for the following 11 PCM word pairs shall be not greater than six least significant bits: A4 and A42, A4 and A5, A4 and A14, A4 and A25, A4 and A34, A42 and A43, A1 and A2, A13 and A1, A44 and A45, A40 and A41, and A43 and A13.

3.2.1.4 WVCU output.

3.2.1.4.1 WVCU automatic gain control (AGC) monitor. PCM word 360 shall have a count of 255 for a signal level of -100 decibels referenced to one milliwatt (dBm) into a 50 ohm load. The count shall be not greater than 125 for a signal level of zero dBm. The plot shall be monotonic and produce a linear calibration curve.

3.2.1.4.2 Post launch. During post launch, the WVCU output signal level at 70 ±5 kHz shall be 20 ±5 decibels (dB) below the signal level at 50 ±5 kHz.

3.2.1.4.3 Prelaunch. During prelaunch, the WVCU output signal level at 15 ±2 kHz shall be 6.6 ±5.0 dB above the signal level at 50 ±5 kHz.

3.2.1.4.4 Gated oscillators.

3.2.1.4.4.1 No oscillators. At the WVCU output, the signal level at all frequencies between 3.0 kHz and 12.0 kHz inclusive shall be not less than 50 dB below the signal level at 50 ±5 kHz.

3.2.1.4.4.2 3.0 kHz. At the WVCU output, the signal level at 3.0 ±0.5 kHz shall be 15 ±5 dB below the signal level at 50 ±5 kHz.

3.2.1.4.4.3 6.0 kHz. At the WVCU output, the signal level at 6.0 ±0.5 kHz shall be 17.5 ±5.0 dB below the signal level at 50 ±5 kHz.

3.2.1.4.4.4 12.0 kHz. At the WVCU output, the signal level at 12.0 ±1.0 kHz shall be 15 ±5 dB below the signal level at 50 ±5 kHz.

3.2.1.5 Bit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

TABLE II. PCM frame words.

Word number	Contents	Word number	Contents	Word number	Contents
1	C1	40	A27	79	C12
2	A1	41	C2	80	C13
3	A2	42	A1	81	C14
4	A3	43	A2	82	A1
5	A4	44	A3	83	A2
6	A5	45	A4	84	A3
7	A6	46	C3	85	A4
8	A7	47	C4	86	C15
9	A8	48	C5	87	C16
10	A1	49	C6	88	C17
11	A2	50	A1	89	C18
12	A3	51	A2	90	A1
13	A4	52	A3	91	A2
14	A9	53	A4	92	A3
15	A10	54	A5	93	A4
16	D2	55	A6	94	C19
17	A13	56	A7	95	C20
18	A1	57	A8	96	C21
19	A2	58	A1	97	C22
20	A3	59	A2	98	A1
21	A4	60	A3	99	A2
22	A14	61	A4	100	A3
23	A15	62	A9	101	A4
24	A16	63	A10	102	A5
25	A17	64	D2	103	A6
26	A1	65	A30	104	A7
27	A2	66	A1	105	A8
28	A3	67	A2	106	A1
29	A4	68	A3	107	A2
30	A18	69	A4	108	A3
31	A19	70	C7	109	A4
32	A20	71	C8	110	A9
33	D1	72	C9	111	A10
34	A1	73	C10	112	D2
35	A2	74	A1	113	A13
36	A3	75	A2	114	A1
37	A4	76	A3	115	A2
38	A25	77	A4	116	A3
39	A26	78	C11	117	A4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

TABLE II. PCM frame words. - Continued.

Word number	Contents	Word number	Contents	Word number	Contents
118	A14	158	A9	198	A5
119	A15	159	A10	199	A6
120	A16	160	D2	200	A7
121	A17	161	A31	201	A8
122	A1	162	A1	202	A1
123	A2	163	A2	203	A2
124	A3	164	A3	204	A3
125	A4	165	A4	205	A4
126	A18	166	C31	206	A9
127	A19	167	C32	207	A10
128	A20	168	C33	208	D2
129	D1	169	C34	209	A13
130	A1	170	A1	210	A1
131	A2	171	A2	211	A2
132	A3	172	A3	212	A3
133	A4	173	A4	213	A4
134	C23	174	C35	214	A14
135	C24	175	C36	215	A15
136	C25	176	C37	216	A16
137	C26	177	C38	217	A17
138	A1	178	A1	218	A1
139	A2	179	A2	219	A2
140	A3	180	A3	220	A3
141	A4	181	A4	221	A4
142	C27	182	C39	222	A18
143	C28	183	C40	223	A19
144	C29	184	C41	224	A20
145	C30	185	C42	225	D1
146	A1	186	A1	226	A1
147	A2	187	A2	227	A2
148	A3	188	A3	228	A3
149	A4	189	A4	229	A4
150	A5	190	C43	230	A25
151	A6	191	C44	231	A26
152	A7	192	C45	232	A27
153	A8	193	C46	233	A32
154	A1	194	A1	234	A1
155	A2	195	A2	235	A2
156	A3	196	A3	236	A3
157	A4	197	A4	237	A4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

TABLE II. PCM frame words. - Continued.

Word number	Contents	Word number	Contents	Word number	Contents
238	C47	278	C59	318	A18
239	C48	279	C60	319	A19
240	C49	280	C61	320	A20
241	C50	281	C62	321	D1
242	A1	282	A1	322	A1
243	A2	283	A2	323	A2
244	A3	284	A3	324	A3
245	A4	285	A4	325	A4
246	A5	286	A34	326	A38
247	A6	287	A35	327	A39
248	A7	288	A36	328	A40
249	A8	289	A37	329	A41
250	A1	290	A1	330	A1
251	A2	291	A2	331	A2
252	A3	292	A3	332	A3
253	A4	293	A4	333	A4
254	A9	294	A5	334	A42
255	A10	295	A6	335	A43
256	D2	296	A7	336	A44
257	A33	297	A8	337	A45
258	A1	298	A1	338	A1
259	A2	299	A2	339	A2
260	A3	300	A3	340	A3
261	A4	301	A4	341	A4
262	C51	302	A9	342	A5
263	C52	303	A10	343	A6
264	C53	304	D2	344	A7
265	C54	305	A13	345	A8
266	A1	306	A1	346	A1
267	A2	307	A2	347	A2
268	A3	308	A3	348	A3
269	A4	309	A4	349	A4
270	C55	310	A14	350	A9
271	C56	311	A15	351	A10
272	C57	312	A16	352	D2
273	C58	313	A17	353	A46
274	A1	314	A1	354	A1
275	A2	315	A2	355	A2
276	A3	316	A3	356	A3
277	A4	317	A4	357	A4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

TABLE II. PCM frame words. - Continued.

Word number	Contents	Word number	Contents	Word number	Contents
358	A47	367	A12	376	A28
359	A48	368	A21	377	A29
360	A49	369	A22	378	A1
361	A50	370	A1	379	A2
362	A1	371	A2	380	A3
363	A2	372	A3	381	A4
364	A3	373	A4	382	S1
365	A4	374	A23	383	S2
366	A11	375	A24	384	S3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

TABLE III. Input and output requirements.

Contents	Input level	Contact	Input voltage	PCM output	
				Count	Output state
A1	High Low	W11P35-10	+1.49 Vdc 0.0 Vdc	186 to 200 121 to 135	
A2	High Low	W11P35-11	+1.49 Vdc 0.0 Vdc	186 to 200 121 to 135	
A3	High Low	W11P34-19	+5.00 Vdc 0.0 Vdc	See A17 See A28	
A4	High Low	W11P34-35	+0.29 Vdc 0.0 Vdc	1 to 33 119 to 151	
A5	High Low	W11P35-28	+3.67 Vdc 0.0 Vdc	232 to 246 121 to 135	
A6	High Low	W11P35-30	+3.38 Vdc 0.0 Vdc	207 to 221 121 to 135	
A7	High Low	W11P35-3	+3.61 Vdc 0.0 Vdc	28 to 42 121 to 135	
A8	High Low	W11P35-22	+7.5 Vdc 0.0 Vdc	28 to 42 121 to 135	
A9	High Low	W11P35-1	+3.70 Vdc 0.0 Vdc	22 to 36 121 to 135	
A10	High Low	1/	1/		
A11	High Low	NA	NA		
A12	High Low	NA	NA		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

TABLE III. Input and output requirements. - Continued.

Contents	Input level	Contact	Input voltage	PCM output	
				Count	Output state
A13	High Low	W11P35-13	+3.70 Vdc -3.70 Vdc	200 to 214 42 to 56	
A14	High Low	W11P35-14	+3.70 Vdc -3.70 Vdc	200 to 214 42 to 56	
A15	High Low	W11P35-12	+0.41 Vdc 0.0 Vdc	178 to 196 117 to 135	
A16	High Low	W11P34-15	+4.84 Vdc 0.0 Vdc	214 to 228 121 to 135	
A17	High Low	W11P34-31	+3.73 Vdc 0.0 Vdc	217 to 231 121 to 135	
A18	High Low	W11P34-37	+6.00 Vdc 0.0 Vdc	25 to 39 121 to 135	
A19	High Low	W11P35-4	+3.61 Vdc 0.0 Vdc	28 to 42 121 to 135	
A20	High Low	W11P35-5	+7.5 Vdc 0.0 Vdc	28 to 42 121 to 135	
A21	High Low	NA	NA		
A22	High Low	NA	NA		
A23	High Low	W9P3-10	+15.0 Vdc 0.0 Vdc	1 to 15 121 to 135	
A24	High Low	W11P34-30	-6.60 Vdc 0.0 Vdc	200 to 214 121 to 135	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

TABLE III. Input and output requirements. - Continued.

Contents	Input level	Contact	Input voltage	PCM output	
				Count	Output state
A25	High Low	W11P35-31	+0.41 Vdc 0.0 Vdc	179 to 197 117 to 135	
A26	High Low	W11P35-16	+9.01 Vdc -9.01 Vdc	213 to 227 29 to 43	
A27	High Low	W11P35-34	+9.01 Vdc -9.01 Vdc	213 to 227 29 to 43	
A28	High Low	W11P35-29	+3.38 Vdc 0.0 Vdc	207 to 221 121 to 135	
A29	High Low	W11P34-9	+26.5 Vdc 0.0 Vdc	8 to 22 121 to 135	
A30	High Low	W11P34-13	+0.98 Vdc 0.0 Vdc	28 to 47 121 to 140	
A31	High Low	W11P34-14	+1.31 Vdc 0.0 Vdc	205 to 219 121 to 135	
A32	High Low	W11P35-36	+9.01 Vdc 0.0 Vdc	29 to 43 121 to 135	
A33	High Low	W11P35-18	+9.01 Vdc 0.0 Vdc	29 to 43 121 to 135	
A34	High Low	W11P35-24	+0.3 Vdc 0.0 Vdc	215 to 236 114 to 135	
A35	High Low	NA	NA	NA	
A36	High Low	W11P34-28	+20.6 Vdc 0.0 Vdc	17 to 31 121 to 135	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

TABLE III. Input and output requirements. - Continued.

Contents	Input level	Contact	Input voltage	PCM output	
				Count	Output state
A37	High Low	W11P34-29	-20.6 Vdc 0.0 Vdc	226 to 240 121 to 135	
A38	High Low	W11P34-10	-11.26 Vdc 0.0 Vdc	165 to 179 121 to 135	
A39	High Low	W11P34-11	+8.04 Vdc 0.0 Vdc	20 to 34 121 to 135	
A40	High Low	W9P3-1	+6.61 Vdc 0.0 Vdc	212 to 226 121 to 135	
A41	High Low	W9P3-2	+6.61 Vdc 0.0 Vdc	212 to 226 121 to 135	
A42	High Low	W9P3-3	+6.61 Vdc 0.0 Vdc	212 to 226 121 to 135	
A43	High Low	W9P3-5	+4.52 Vdc -4.52 Vdc	214 to 228 28 to 42	
A44	High Low	W9P3-6	+4.52 Vdc -4.52 Vdc	214 to 228 28 to 42	
A45	High Low	W9P3-4	+2.94 Vdc -2.94 Vdc	196 to 210 46 to 60	
A46	High Low	W9P3-9	+10.71 Vdc -6.78 Vdc	168 to 182 46 to 60	
A47 Type I	High Low	R2-2 and R3 together	+26.5 Vdc 0.0 Vdc	13 to 33 121 to 135	
A47 Type II	High Low	W11P35-17	+26.5 Vdc 0.0 Vdc	18 to 45 121 to 135	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

TABLE III. Input and output requirements. - Continued.

Contents	Input level	Contact	Input voltage	PCM output	
				Count	Output state
A48	High Low	W11P35-7	+1.00 Vdc -1.00 Vdc	41 to 58 193 to 210	
A49	High Low	NA		See 3.2.1.4.1	
A50	High Low	NA			
D1B1	High Low	W11P35-32	+15.0 Vdc 0.0 Vdc		1 0
D1B2	High Low	W11P34-16	+6.01 Vdc 0.0 Vdc		1 0
D1B3		Spare	NA		1 0
D1B4	High Low	W11P34-34	+6.01 Vdc 0.0 Vdc		1 0
D1B5	High Low	W11P34-32	+6.01 Vdc 0.0 Vdc		1 0
D1B6	High Low	W11P34-17	+1.49 Vdc -1.49 Vdc		1 0
D1B7	High Low	W9P3-12	+4.99 Vdc 0.0 Vdc		1 0
D1B8	High Low	W9P3-10	+15.0 Vdc 0.0 Vdc		1 0
D2B1	High Low	W11P34-33	+6.01 Vdc 0.0 Vdc		1 0

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

TABLE III. Input and output requirements. - Continued.

Contents	Input level	Contact	Input voltage	PCM output	
				Count	Output state
D2B2	High Low	W9P3-11	+4.99 Vdc 0.0 Vdc		1 0
D2B3	High Low	2/	2/		1 0
D2B4		Spare	NA		1 0
D2B5 3/		NA	NA		1 0
D2B6		Spare	NA		1 0
D2B7	High Low	W11P19-2	+26.59 Vdc Open		1 0
D2B8	High Low	W11P35-23	+14.0 Vdc 0.0 Vdc		1 0

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

TABLE III. Input and output requirements. - Continued.

1/ A10 (voltages below to be present at contact)

Target detect W11J35-23	Fuze trigger W11J35-2	Fuze output pulse W11J19-2	Count
+7.0 Vdc	+8.0 Vdc	+26.5 Vdc	+31 ±5 Reference
Open	+8.0 Vdc	+26.5 Vdc	+31 ±5 Reference
+7.0 Vdc	Ground	+26.5 Vdc	+63 ±9 Reference
+7.0 Vdc	+8.0 Vdc	Open	+125 ±20 Reference

2/ D2B3

W11J19-4	W11J19-3	D2B3
Ground	Ground	0
Ground	Open	0
+26.5 Vdc	Ground	0
+26.5 Vdc	Open	1

3/ D2B5

Aircraft power (3.2.1.1.2)	Output state
ON =	Switching between "1" and "0" at a rate of not less than five transitions per second.
OFF =	"0"

3.2.1.5.1 Battery down. The voltage at contact W11P35-26 shall be 0.0 ±0.5 Vdc when W11P34-19 is connected to ground or to 4.25 ±0.75 Vdc.

3.2.1.5.2 Battery up. The voltage at contact W11P35-26 shall be 0.0 ±0.5 Vdc when W11P34-19 is connected to 4.25 ±0.75 Vdc, and 4.0 ±1.0 Vdc when W11P34-19 is connected to ground.

3.2.1.6 Fuze output pulse input impedance. The fuze output pulse input impedance measured between contacts W11P19-1 and W11P19-2 shall be 2.0 ±1.0 ohms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

3.2.1.7 C-band transponder output. The C-band transponder output shall radiate a pulsed RF waveform in accordance with Table IV.

TABLE IV. C-band transponder output.

Assembly part number	Input pulse spacing	Output response
917AS8200-1	4.0 ±0.4 us	1/
917AS8200-2	4.0 ±0.4 us	1/
917AS8200-3	4.0 ±0.4 us	1/
917AS8200-4	4.0 ±0.4 us	1/
917AS8200-5	4.0 ±0.4 us	None
917AS8200-6	4.0 ±0.4 us	None
917AS8200-7	4.0 ±0.4 us	None
917AS8200-8	4.0 ±0.4 us	None
917AS8200-1	7.0 ±0.7 us	None
917AS8200-2	7.0 ±0.7 us	None
917AS8200-3	7.0 ±0.7 us	None
917AS8200-4	7.0 ±0.7 us	None
917AS8200-5	7.0 ±0.7 us	1/
917AS8200-6	7.0 ±0.7 us	1/
917AS8200-7	7.0 ±0.7 us	1/
917AS8200-8	7.0 ±0.7 us	1/

1/ Output response

(a)	RF output frequency	5700 ±10 MHz
(b)	Pulse width	0.8 ±0.2 microsecond (us)
(c)	Pulse period	1.0 ±0.5 us

3.3 Design and construction.

3.3.1 Production drawings. The assembly shall be fabricated and assembled in accordance with the drawings, parts lists, and other documents listed on Drawing 917AS6400, 917AS8200, or 917AS8845 as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

3.3.2 Standards of manufacture. The assembly shall be manufactured, inspected, and tested under conditions and procedures meeting the requirements specified herein and as specified on the applicable specification or assembly drawing.

3.4 Nameplates and part number marking. Nameplates and part number marking shall be in accordance with Drawing 917AS6400, 917AS8200, or 917AS8845 as applicable.

3.5 Interchangeability. All assemblies, subassemblies, and parts complying with the requirements of the same drawing number shall be physically and functionally interchangeable.

3.6 First article. When specified in the contract or purchase order (see 6.2.1d), a sample shall be subjected to first article inspection (see 4.4 and 6.3).

3.7 Workmanship. The assembly shall be fabricated in a manner that shall ensure compliance with all requirements of this specification and the applicable drawing. Unless otherwise specified herein or on the applicable drawing, workmanship shall be in accordance with MIL-STD-454, Requirement 9.

3.7.1 Soldering. Soldering shall be in accordance with WS-6536.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order (see 6.2.1e), the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order (see 6.2.1f), the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).

b. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified herein, all inspections shall be performed in accordance with the test provisions and conditions specified in 4.6 through 4.6.8.6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

4.4 First article inspection. The first article sample (see 6.2.1d) shall be subjected to the first article inspection of Table V. The contractor shall prepare a first article inspection report (see 6.2.2).

4.4.1 First article sample. When specified in the contract or purchase order (see 6.2.1d), a first article sample shall be manufactured using the same processes, parts, materials, methods, and detail of design proposed for production. Any production prior to first article approval shall be at the contractor's risk. The first article sample shall consist of the number of assemblies specified in the contract or purchase order (see 6.2.1g).

4.4.2 First article approval. First article approval shall be by the procuring activity upon satisfactory completion of first article inspection. Failure of any assembly to pass any of the tests and examinations of first article inspection shall be cause for rejection of the first article sample. Failures which are verified to be attributable to part manufacturing defects will not be cause for rejection. Corrective action acceptable to the procuring activity shall be established and implemented on the defective part(s) prior to first article approval.

4.5 Quality conformance inspection. Unless othewise specified in the contract or purchase order (see 6.2.1h), all production assemblies shall be subjected to the quality conformance inspection of Table V.

4.5.1 Quality conformance approval. Quality conformance approval shall be by the procuring activity upon satisfactory completion of the quality conformance inspection. Failure of an assembly to pass any of the tests and examinations of the quality conformance inspection shall be cause for rejection of that assembly.

4.6 Test provisions and conditions.

4.6.1 Test equipment accuracy. Test equipment and inspection facilities shall be of sufficient accuracy, quality, and quantity to assure performance of the tests and examinations specified herein. Unless otherwise specified in the contract or purchase order (see 6.2.1i), all test equipment shall meet the following accuracy requirements.

a. Measurements of open-ended maximum and minimum requirements shall be accurate ±5.0 percent of the requirement, except measurements not greater than 100 millivolts shall be accurate ±10 percent.

b. Measurements of requirements expressed in dB shall be accurate to ±0.2 dB or ±20 percent of the tolerance, whichever is greater.

c. All other measurements shall be accurate within ±20 percent of the tolerance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

TABLE V. First article and quality conformance inspection matrix.

Examination or test	Requirement	Examination or test method	
		First article	Quality conformance
Seeker power	3.2.1.1.1	4.7.1.1.1	4.7.1.1.1
Aircraft power	3.2.1.1.2	4.7.1.1.2	4.7.1.1.2
Battery simulation	3.2.1.1.3	4.7.1.1.3	4.7.1.1.3
+26.5 Vdc	3.2.1.1.4	4.7.1.1.4	4.7.1.1.4
Squib resistance	3.2.1.1.5	4.7.1.1.5	4.7.1.1.5
RF output power	3.2.1.2.1	4.7.1.2.1	4.7.1.2.1
PCM transmitter center freqency	3.2.1.2.2	4.7.1.2.2	4.7.1.2.2
PCM transmitter deviation	3.2.1.2.3	4.7.1.2.3	4.7.1.2.3
WVCU transmitter center frequency	3.2.1.2.4	4.7.1.2.4	4.7.1.2.4
WVCU transmitter deviation	3.2.1.2.5	4.7.1.2.5	4.7.1.2.5
PCM bit rate	3.2.1.3.1	4.7.1.3.1	4.7.1.3.1
PCM synchronization words	3.2.1.3.2	4.7.1.3.2	4.7.1.3.2
PCM frame format	3.2.1.3.3	4.7.1.3.3	4.7.1.3.3
Crosstalk PCM word pairs	3.2.1.3.4	4.7.1.3.4	4.7.1.3.4
WVCU AGC monitor	3.2.1.4.1	4.7.1.4.1	4.7.1.4.1
Post launch	3.2.1.4.2	4.7.1.4.2	4.7.1.4.2
Prelaunch	3.2.1.4.3	4.7.1.4.3	4.7.1.4.3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

TABLE V. First article and quality conformance inspection matrix. - Continued.

Examination or test	Requirement	Examination or test method	
		First article	Quality conformance
No oscillators	3.2.1.4.4.1	4.7.1.4.4.1	4.7.1.4.4.1
3.0 kHz	3.2.1.4.4.2	4.7.1.4.4.2	4.7.1.4.4.2
6.0 kHz	3.2.1.4.4.3	4.7.1.4.4.3	4.7.1.4.4.3
12.0 kHz	3.2.1.4.4.4	4.7.1.4.4.4	4.7.1.4.4.4
Battery down	3.2.1.5.1	4.7.1.5.1	4.7.1.5.1
Battery up	3.2.1.5.2	4.7.1.5.2	4.7.1.5.2
Fuze output pulse input impedance	3.2.1.6	4.7.1.6	4.7.1.6
C-band transponder output	3.2.1.7	4.7.1.7	4.7.1.7
Design and construction	3.3.1, 3.3.2	4.7.2	4.7.2
Nameplates and part number marking	3.4	4.7.3	4.7.3
Interchangeability	3.5	4.7.4	4.7.4
Workmanship	3.7	4.7.5	4.7.5

4.6.2 Maintenance and calibration. All test equipment shall be calibrated and maintained in accordance with MIL-STD-45662.

4.6.3 Environmental conditions. Unless otherwise specified herein, on the applicable assembly drawing, or in the subassembly specification, tests shall be performed under the following environmental conditions:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

a. Temperature: Ambient, between +18.0 and +35.0° C

b. Altitude: Elevation of test facility

c. Relative humidity: Maintained between 30 and 70 percent

4.6.4 Test equipment loading. The measurements specified in 4.7.1 through 4.7.1.7 shall be made with test equipment having input resistance not less than 100 kilohms (kohms) and capacitance not greater than 1,000 picofarads (pF).

4.6.5 Test sequence. Unless otherwise specified herein, all tests shall be performed under the provisions and conditions specified herein, but need not be performed in the order shown.

4.6.6 Common ground. Unless otherwise specified herein, the assembly under test and all test equipment shall be referenced to a common ground. Common ground shall be contacts W11P34-4, W11P34-24, W11P34-26, W11P35-8, W11P35-25, W11P35-27, and W9P3-13.

4.6.7 Inputs. Unless otherwise specified herein, the inputs specified herein shall be maintained during performance of the tests specified in 4.7.1 through 4.7.1.7.

4.6.7.1 Input tolerance. Unless otherwise specified herein, all inputs shall be maintained within ±1 percent of the values specified herein.

4.6.7.2 Analog data inputs. The contacts listed in Tables III and VI shall be connected to the corresponding high or low voltage of Table III through the corresponding resistance of Table VI.

4.6.7.3 Data processing (DP) inputs.

4.6.7.3.1 Case I. Contacts W11P34-1, W11P34-2, W11P34-3, W11P34-20, W11P34-21, and W11P34-22 shall be connected to +4.2 ±0.7 Vdc (see Table VII).

4.6.7.3.2 Case II. Contact W11P34-21 shall be connected to a 3.07 megahertz (MHz) square wave of levels that go from a logic "0" to logic "1". Contacts W11P34-1, W11P34-2, W11P34-3, W11P34-20, and W11P34-22 shall have the waveforms illustrated in Figure 1 (see Table VII).

4.6.7.4 WVCU inputs. The following sinusoids shall be connected to the contacts as specified in Table VIII.

4.6.8 Supply voltages. The supply voltages shall be applied as specified in 4.7.1 through 4.7.1.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

TABLE VI. Input source resistance.

Input contact	Source resistance (±1 percent)	Input contact	Source resistance (±1 percent)
W11P35-10	20 kohms	W11P34-13	1 Mohms 1/
W11P35-11	20 kohms	W11P34-14	100 kohms
W11P34-35	100 kohms	W11P35-36	20 kohms
W11P35-28	20 kohms	W11P35-18	20 kohms
W11P35-30	20 kohms	W11P35-24	3 kohms
W11P35-3	8.1 kohms	W11P35-32	100 kohms
W11P35-22	8.1 kohms	W11P34-10	16.5 kohms
W11P35-1	10 kohms	W9P3-1	20 kohms
W11P35-13	20 kohms	W9P3-2	20 kohms
W11P35-14	20 kohms	W9P3-3	20 kohms
W11P35-12	20 kohms	W9P3-5	20 kohms
W11P34-15	100 kohms	W9P3-6	20 kohms
W11P34-31	100 kohms	W9P3-4	20 kohms
W11P34-37	1 Mohms 1/	W9P3-9	20 kohms
W11P35-4	8.1 kohms	W11P35-7	933 kohms
W11P35-5	8.1 kohms	W11P34-16	100 kohms
W9P3-10	9.31 kohms	W11P34-34	100 kohms
W11P34-30	5 kohms	W11P34-32	100 kohms
W11P35-31	20 kohms	W11P34-17	20 kohms
W11P35-16	20 kohms	W11P34-33	100 kohms
W11P35-34	20 kohms	W9P3-11	20 kohms
W11P35-29	20 kohms	W11P35-23	49.9 kohms
W11P34-11	3 kohms	W11P19-2	10 kohms
		W11P35-2	3 kohms

1/ Megohms (Mohms)


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

TABLE VII. DP data inputs.

Contents 1/	Case I of (4.6.7.3.1)	Case II of (4.6.7.3.2)
C1, 9, 17, 25, 33, 41, 49, 57	85	1
C2, 10, 18, 26, 34, 42, 50, 58	85	35
C3, 11, 19, 27, 35, 43, 51, 59	85	69
C4, 12, 20, 28, 36, 44, 52, 60	85	103
C5, 13, 21, 29, 37, 45, 53, 61	85	137
C6, 14, 22, 30, 38, 46, 54, 62	85	171
C7, 15, 23, 31, 39, 47, 55	85	205
C8, 16, 24, 32, 40, 48, 56	85	239

1/ Logic "0" shall be +0.20 ±0.21 Vdc. Logic "1" shall be +5.0 ±0.5 Vdc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

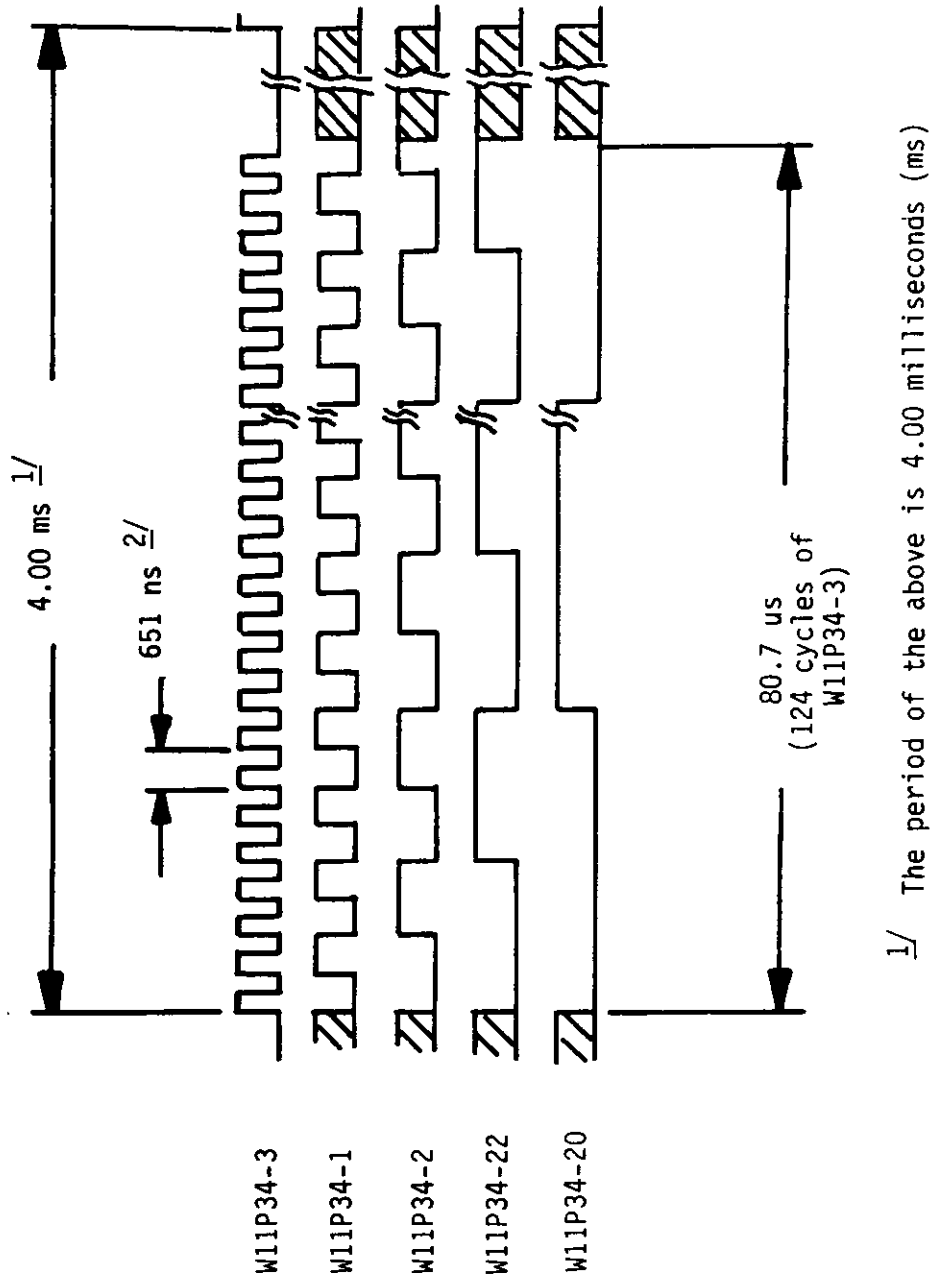

1/ The period of the above is 4.00 milliseconds (ms)

2/ Nano seconds (ns)

FIGURE 1. Timing diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

TABLE VIII. WVCU inputs.

Contact	Sinusoid	
	Frequency	Level
W10P1	3.420 MHz ±1 kHz	100 ±10 mVrms 1/
W10P4	"Q" + 3.470 MHz ±3 kHz 2/	100 ±10 mVrms 1/
W10P5	"Q" + 1 kHz 2/	-50 ±5 dBm into 50 ohms
W11P35-9 (thru 10 kohms)	15 ±2 kHz	60 ±3 mVrms

1/ millivolts root mean square (mVrms)

2/ "Q" shall be as specified in Drawing 917AS6626.

4.6.8.1 Battery simulation. +26.5 ±1.0 Vdc (approximately 5.0 amperes (A)) shall be applied to contact W11P35-20.

4.6.8.2 Aircraft power.

a. 113.0 ±6.5 volts root mean square (Vrms), 400 ±20 hertz (Hz), phase one (approximately 350 mArms) shall be applied to contact W11P34-6.

b. 113.0 ±6.5 Vrms, 400 ±20 Hz, phase two (approximately 1.3 Arms with heater on, approximately 350 mArms with heater off) shall be applied to contact W11P34-7.

c. 113.0 ±6.5 Vrms, 400 ±20 Hz, phase three (approximately 350 mArms) shall be applied to contact W11P34-25.

d. Neutral shall be connected to W11P34-26.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

4.6.8.3 Seeker power.

a. +26.5 ±1.0 Vdc (approximately 0.7 A) shall be applied to contact W11P34-9.

b. +20.6 ±0.5 Vdc (approximately 0.3 A) shall be applied to contact W11P34-28.

c. -20.6 ±0.5 Vdc (approximately 0.08 A) shall be applied to contact W11P34-29.

4.6.8.4 +26.5 Vdc tests (Type I only). +26.5 Vdc at 8.0 A shall be applied to R2-2 and R3-2 for not greater than 30 s with not less than one minute between applications.

4.6.8.5 +26.5 Vdc tests (Type II only). +26.5 Vdc at 8.0 A shall be aplied to W11P35-17 for not greater than 30 s per application with not less than one minute between applications.

4.6.8.6 Loads. A voltage of +5.0 ±0.3 Vdc shall be applied through a resistance of 5000 ±500 ohms (wattage shall be not less than 100 milliwatts) to W11P35-26 as specified in 4.7.1 through 4.7.1.7.

4.7 Test method and inspection procedures.

4.7.1 Electrical performance tests.

4.7.1.1 Power logic.

4.7.1.1.1 Seeker power. With power applied as specified in 4.6.8.3, the assembly shall meet the requirements of 3.2.1.1.1.

4.7.1.1.2 Aircraft power. With the power of 4.6.8.3 removed, and the power specified in 4.6.8.2 applied, the assembly shall meet the requirements of 3.2.1.1.2 and D2B5 of Table III.

4.7.1.1.3 Battery simulation. With the power of 4.6.8.2 removed, and the power of 4.6.8.1 applied, the assembly shall meet the requirements of 3.2.1.1.3.

4.7.1.1.4 +26.5 Vdc tests. With the power of 4.6.8.1 removed, and the power of 4.6.8.4 applied, the assembly shall meet the requirements of 3.2.1.1.4.

4.7.1.1.5 Squib resistance. With the power of 4.6.8.4 removed, and a test current of not greater than 10 mAdc applied, the resistance measured between the contacts W11P35-19 and W11P35-37 shall meet the requirements of 3.2.1.1.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

4.7.1.2 Transmitters.

4.7.1.2.1 RF output power. With the power of 4.6.8.1 applied, the assembly shall meet the requirements of 3.2.1.2.1.

4.7.1.2.2 PCM transmitter center frequency. With the power of 4.6.8.1 applied, the assembly shall meet the requirements of 3.2.1.2.2.

4.7.1.2.3 PCM transmitter deviation. With the power of 4.6.8.1 applied, the assembly shall meet the requirements of 3.2.1.2.3.

4.7.1.2.4 WVCU transmitter center frequency. With the power of 4.6.8.1 applied, W11P35-23, W11P35-32, and W11P19-2 in the low state of Table III, and +4.3 ±0.7 Vdc applied to W11P35-21, the assembly shall meet the requirements of 3.2.1.2.4.

4.7.1.2.5 WVCU transmitter deviation. With the power of 4.6.8.1 applied, the assembly shall meet the requirements of 3.2.1.2.5.

4.7.1.3 PCM output.

4.7.1.3.1 PCM bit rate. With the power of 4.6.8.1 applied, the assembly shall meet the requirements of 3.2.1.3.1.

4.7.1.3.2 PCM synchronization words. With the power of 4.6.8.1 applied, logic "1" shall be a decrease in PCM transmitter frequency. The assembly shall meet the requirements of 3.2.1.3.2.

4.7.1.3.3 PCM frame format. With the power of 4.6.8.1 applied, the assembly shall meet the requirements of 3.2.1.3.3.

4.7.1.3.4 Crosstalk PCM word pairs. Apply a sinusoid of 12 ±3 Hz at the amplitude specified in Table IX sequentially to the contacts specified in Table IX. Monitor the PCM output word corresponding to each test condition and verify that crosstalk noise meets the requirements of 3.2.1.3.4. Perform this test for both values of Vdc input voltage of Table III applied to the input contact of the PCM output word under test.

4.7.1.4 WVCU output.

4.7.1.4.1 WVCU AGC monitor. With the power of 4.6.8.1 applied, except with +5.0 ±0.5 Vdc applied to contact W11P35-21, the signal of 4.6.7.4 applied to W10P4, and the signal level of W10P5 allowed to be 0.0, -10, -20, -30, -40, -50, -60, -70, -80, -90, and -100 dBm for 11 different readings of the count in PCM word 360, a plot shall be made of the above which shall meet the requirements of 3.2.1.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

TABLE IX. Crosstalk test table.

Input signal-sinusoid			PCM output word	Test	
Contact	Source resistance	Voltage V (p-p)		Analog word	Word pair (see 3.2.1.3.4)
W11P34-35	100 kohms	0.60 ±0.06	334	A42	1
W11P34-35	100 kohms	0.60 ±0.06	342	A5	2
W11P34-35	100 kohms	0.60 ±0.06	22	A14	3
W11P34-35	100 kohms	0.60 ±0.06	230	A25	4
W11P34-35	100 kohms	0.60 ±0.06	286	A34	5
W9P3-3	20 kohms	13 ±1	335	A43	6
W11P35-10	20 kohms	3.0 ±0.3	3	A2	7
W11P35-13	20 kohms	0.7 ±0.07	2	A1	8
W9P3-6	20 kohms	9 ±1	337	A45	9
W9P3-1	20 kohms	13 ±1	329	A41	10
W9P3-5	20 kohms	9 ±1	17	A13	11

4.7.1.4.2 Post launch. Under the conditions of 4.7.1.4.1, except with a signal level of -50 dBm applied to W10P3, the assembly shall meet the requirements of 3.2.1.4.2.

4.7.1.4.3 Prelaunch. Under the conditions of 4.7.1.4.1, except with a ground applied to contact W11P35-21 and a signal level of -50 dBm applied to W10P5, the assembly shall meet the requirements of 3.2.1.4.3.

4.7.1.4.4 Gated oscillators.

4.7.1.4.4.1 No oscillators. Under the conditions of 4.7.1.4.1, the assembly shall meet the requirements of 3.2.1.4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

4.7.1.4.4.2 3.0 kHz. Under the conditions of 4.7.1.4.1, except with a signal level of -50 dBm applied to W10P5 and with contact W11P35-32 in a state "1" as specified in Table III, the assembly shall meet the requirements of 3.2.1.4.4.2.

4.7.1.4.4.3 6.0 kHz. Under the conditions of 4.7.1.4.1, except with a signal level of -50 dBm applied to W10P5 and with contact W11P35-23 in a state "1" as specified in Table III, the assembly shall meet the requirements of 3.2.1.4.4.3.

4.7.1.4.4.4 12.0 kHz. Under the conditions of 4.7.1.4.1, except with a signal level of -50 dBm applied to W10P5 and with contact W11P19-2 in a state "1" as specified in Table III, the assembly shall meet the requirements of 3.2.1.4.4.4.

4.7.1.5 Bit.

4.7.1.5.1 Battery down. Under the conditions of 4.7.1.4.3, the assembly shall meet the requirements of 3.2.1.5.1.

4.7.1.5.2 Battery up (Type I only). Under the conditions of 4.6.8.4, and with W11P34-19 connected to +4 ±1 Vdc, the assembly shall meet the requirements of 3.2.1.5.2.

4.7.1.5.3 Battery up (Type II only). Under the conditions of 4.6.8.5, and with W11P34-19 connected to +4 ±1 Vdc, the assembly shall meet the requirements of 3.2.1.5.2.

4.7.1.6 Fuze output pulse input impedance. With a test voltage between contacts W11P19-1 and W11P19-2 not greater than 350 millivolts direct current (mVdc), the assembly shall meet the requirements of 3.2.1.6.

4.7.1.7 C-band transponder output (Drawing 917AS8200 only). With the double pulse RF waveform, as specified below, illuminating the center antenna of the assembly, the assembly shall meet the requirements of 3.2.1.7.

a.	RF input frequency	5600 ±5 MHz
b.	Pulse width	0.8 ±0.2 microsecond (us)
c.	Pulse period	1.0 ±0.5 us
d.	Pulse spacing	4.0 ±0.4 us or 7.0 ±0.7 us as required

4.7.2 Design and construction. The assembly shall be visually and mechanically inspected to determine compliance with 3.3.1 and 3.3.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

4.7.3 Nameplates and part number marking. The assembly shall be visually inspected to determine compliance with 3.4.

4.7.4 Interchangeability. The assembly shall be visually and mechanically inspected to determine compliance with 3.5.

5. PACKAGING

5.1 Preservation and packaging. As specified in the contract or purchase order (see 6.2.1j), preservation and packaging shall be level A or C.

5.1.1 Level A. When specified in the contract or purchase order (see 6.2.1j), each assembly shall be individually protected and individually packaged in accordance with MIL-P-116, Method III.

5.1.2 Level C. When specified in the contract or purchase order (see 6.2.1j), each assembly shall be packaged to afford protection against damage during shipment from the supply source to the first receiving activity for immediate use. Packages shall comply with the Uniform Freight Classification Rules or regulations of other carriers as applicable to the mode of transportation.

5.2 Packing. As specified in the contract or purchase order (see 6.2.1j), packing shall be level A or C.

5.2.1 Level A. The assemblies preserved and packaged as specified in 5.1.1 shall be packed in boxes constructed in accordance with PPP-B-601.

5.2.2 Level C. Assemblies preserved and packaged in accordance with 5.1.2 shall be packed to afford protection against damage during direct shipment from the supply source to the first receiving activity for immediate use. Shipping containers shall be in accordance with the Uniform Freight Classification Rules or regulations of other carriers as applicable to the mode of transportation.

5.3 Marking. Unless otherwise specified in the contract or purchase order (see 6.2.1k), marking shall be as specified in 3.3.1. Individual packages and shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

6.1 Intended use. The assemblies are intended for use in the AIM/RIM-7M guided missile.

6.2 Ordering data.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Classification(s) of assembly (see 1.2).

c. Whether a transponder is to be included (see 3.1).

d. First article sample, if required (see 3.6, 4.4, and 4.4.1).

e. Responsibility for inspection if different than 4.1.

f. Inspection facilities if different than 4.1.

g. Number of assemblies in the first article sample (see 4.4.1).

h. Quality conformance inspection if different than 4.5.

i. Test equipment accuracy if different than 4.6.1.

j. Level of preservation, packaging, and packing (see 5.1, 5.1.1, 5.1.2 and 5.2).

k. Marking if different than 5.3.

6.2.2 Data requirements. When this specification is used in an acquisition which incorporates a DD Form 1423, Contract Data Requirements List (CDRL), the data requirements identified below shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved CDRL incorporated into the contract. When the provisions of FAR 7-104.9(n)(2) are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification is cited in the following paragraphs.

Paragraph number	Data requirement title	Applicable DID number	Option
4.4	First Article Inspection Report	DI-T-4902	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

6.3 First article. When a first article inspection is required, the assembly will be tested and should be a first article sample (see 4.4.1). The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, test, and approval of the first article.

Preparing activity:
Navy - AS

(Project 1420-N276)

 U.S. GOVERNMENT PRINTING OFFICE: 1985 - 509-038/23383

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Commanding Officer
Naval Air Engineering Center
Systems Engineering Standardization Department
(SESD), Code 93
Lakehurst, NJ 08733

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Air Engineering Center
Systems Engineering Standardization Department
(SESD). Code 93
Lakehurst, NJ 08733

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-T-85244 (AS)	TRANSMITTING SET, TELEMETRIC DATA

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:31Z
Check the source to verify that this is the current version before use.