GGG-B-785B
October 6, 1987
SUPERSEDING
Int. Fed. GGG-B-00785A(GSA-FSS)
October 14, 1966

FEDERAL SPECIFICATION

BURNISHERS, CONTACT, HAND (AND BLADES)

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers contact burnishers used for cleaning and burnishing contact points or relays.

1.2 Classification.

1.2.1 Types and classes. Contact burnishers shall be of the following types, and classes when applicable, as specified (see 6.1).

Type I - Chuck type, with blade
Type II - Flat type, with finger grip
  Class 1 - Sand blasted blade
  Class 2 - Smooth blade

1.2.2 Replacement blades. Replacement blades required for type I burnishers, shall be in accordance with the figure specified (see 6.1).
Round blades
Flat blades

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specification:

PPP-P-46 - Packaging and Packing of Hand Tools

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and commercial item descriptions, as outlined under General Information in the Index of Federal Specifications, Standards and Commercial Item Descriptions. The index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.

(Singles copies of this specification, other Federal specifications, and commercial item descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston; New York; Philadelphia; Washington, DC; Atlanta; Chicago; Kansas City, MO; Fort Worth; Houston; Denver; Los Angeles; San Francisco; and Seattle, WA.

(Federal Government activities may obtain copies of Federal specifications, standards, commercial item descriptions and the Index of Federal Specifications, from established distribution points in their Agencies.)

Military Standard:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes

(Copies of military specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bid or solicitation for offers, shall apply.

American Society For Testing and Materials (ASTM) Standards:

ASTM A 314 - Stainless and Heat-Resisting Steel Billets and Bars For Forging

(Application for copies should be addressed to The American Society for Testing and Materials Standards, 1916 Race Street, Philadelphia, PA 19103.)

3. REQUIREMENTS

3.1 Materials. The burnishers shall be fabricated from spring steel in accordance with ASTM A 314.

3.2 Finish and coatings. When sand blasted blades are specified, the sand blasting operation shall provide surfaces suitable for burnishing contact points. When smooth blades are specified, the blade surfaces shall have a roughness height value (RHV) not exceeding 20 microinches. Other components shall be finished as specified or in accordance with accepted industry practice.

3.2.1 Finish and coatings for type I burnishers. The body and cap shall have a satin finish. The blades shall be sand blasted. The periphery or outside diameter of the tightening sleeve may be either smooth, knurled or serrated. The exposed surfaces on the chuck tightening sleeve shall be either phosphate or oxidize coated. The pocket clip and ferrule shall be either nickel plated or nickel and chromium plated.

3.2.2 Finish for type II burnishers. The finish on the finger grips shall be molded or fabricated in accordance with accepted industry practice.

3.2.2.1 Class 1. The blades of type II, class 1 burnishers shall be sand blasted (see 3.2).

3.2.2.2 Class 2. The blades of type II, class 2 burnishers shall be smooth (see 3.2).

3.3 Type I. The type I burnishers shall consist essentially of a body having a compartment containing 12 blades in one end and the opposite end having a four-jaw-type chuck, a screw plug to hold the blades in the compartment, and a cap with a pocket clip. The contact burnishers shall be similar to figure 1 and shall comply with the dimensions specified.

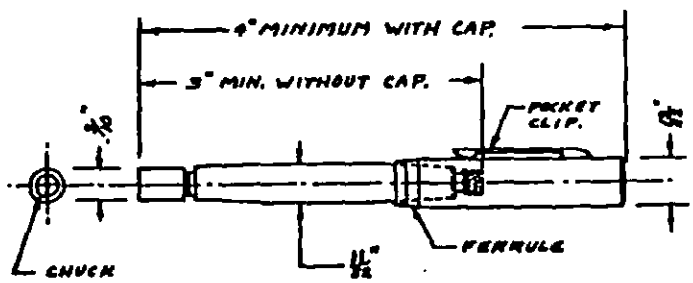


FIGURE 1. Type I, Burnisher, Contact (chuck type)

3.3.1 Body. The body shall be made of plastic, rubber, or synthetic rubber, with a compartment in one end. The opening to the compartment shall have a threaded brass or bronze bushing for receiving the screw plug which retains the blades in the magazine. The body shall be provided with a four-jaw-type of chuck, on the end opposite the compartment. The body shall be tapered on both ends, so that the cap will fit on each end of the body.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

3.3.2 Compartment. The compartment shall be of such diameter and depth as to hold the 12 blades hereinafter specified.

3.3.3 Screw plug. The screw plug shall be threaded to fit the bushing in the body. The screw plug shall be provided with a flange or shoulder for stopping the plug from screwing too deep into the compartment and striking the blades. The screw plug shall have a knurled or serrated knob 1/4 inch in diameter and 3/16 inch in length.

3.3.4 Cap. The cap shall be made of plastic, rubber, or synthetic rubber, with a metal pocket clip permanently attached. A metal band or ferrule shall be permanently assembled near the entering end of the cap to prevent the cap from splitting. The hollow in the cap shall be of such depth that when assembled on the chuck end of the body, with any flat blade assembled to full depth in the chuck, the cap will not strike the free end of the blade.

3.3.5 Chuck. The chuck shall be of the four-jawed type, that is, the end of the chuck shall have four gripping portions capable of holding the round and flat blades shown in figures 2 and 3.

3.3.6 Blades. Twelve sand-blasted (see 3.2) blades shall be furnished with each burnisher. Six blades shall be round and six shall be flat (see 3.3.6.1 and 3.3.6.2).

3.3.6.1 Round blades. The six round blades shall be made of music wire, and shall be in accordance with figure 2.

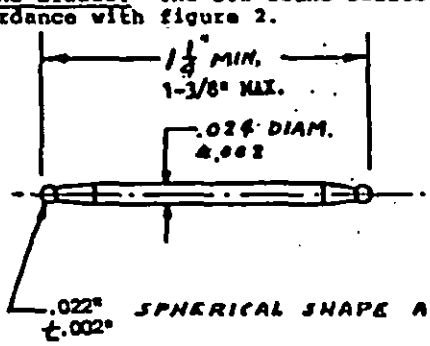


FIGURE 2 Round blades, for type I burnishers (sand blasted finish).

3.3.6.2 Flat blades. The six flat blades shall be made of steel feeler gage stock, and shall be in accordance with figure 3.

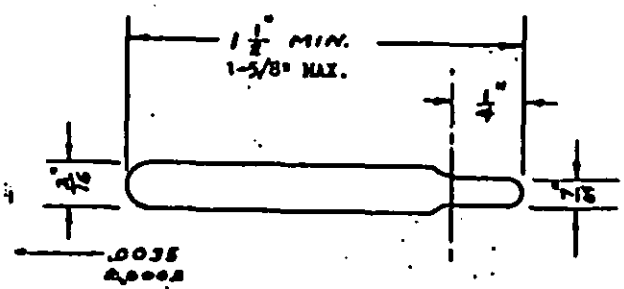


FIGURE 3. Flat blades, for type I burnishers (sand blasted finish).

3.4 Type II. Each type II burnisher shall be a flat steel blade having a finger grip made of plastic, rubber, or synthetic rubber.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

3.4.1 Class 1. The type II, class 1 burnisher blade shall be provided with sand blasted surfaces (see 3.2). The burnisher shall be similar to figure 4 and shall be in accordance with table I, as specified by size number (see 6.1).

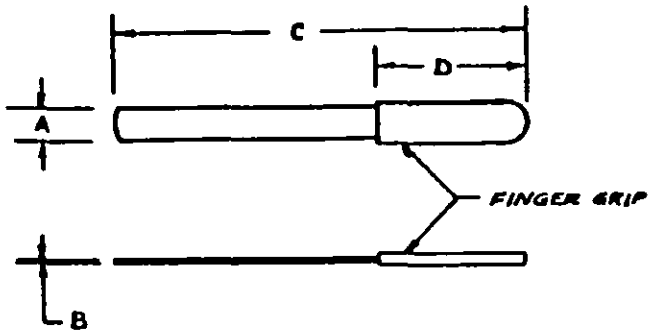


FIGURE 4. Type II burnisher, flat blade type.
Class 1 - Sand blasted blade
Class 2 - Smooth blade

TABLE I. Type II, Class 1, Burnishers, Flat Blade Type With Sand Blasted Blade

Size No.	A +1/16, -1/64 Inch	B ±.001 Inch	C ±.001 Inches	D ±.001 Inches
1	3/16	.0070	3	1-1/4
2	1/4	.010	3	1-1/4
3	1/4	.0312	3	1-1/4
4	13/16	.015	3	1-1/4

3.4.2 Class 2. The type II, class 2 burnishers blade shall have smooth surface (see 3.2). The burnisher shall be similar to figure 4 and shall be in accordance with the size shown in table II, as specified (see 6.1).

TABLE II. Type II, Class 2 Burnisher, Flat Blade Type With Smooth Blade

Size No.	A +1/16, -1/64 Inch	B Inch	C ±.001 Inches	D ±.001 Inches
1	3/16	.031 ± .002	3	1-1/4
2	1/4	.008 ± .0005	3	1-1/4
3	1/4	.010 ± .0005	3	1-1/4
4	1/4	.016 ± .002	3	1-1/4

3.5 Identification marking. Each burnisher shall be etched or stamped in a permanent and legible manner with the manufacturer's name or identifying symbol of such known character that the source may be readily identifiable, part number and country of origin.

3.6 Workmanship. The burnishers shall be free from rust, burrs, sharp edges, and any imperfection which may impair their serviceability or durability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that the supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

4.2. Examination of the end item. The sample unit for this examination shall be one completely fabricated burnisher. The inspection level shall be Level I with an acceptable quality level (AQL) of 2.5 percent defective in accordance with MIL-STD-105.

4.2.1 Examination of the end item for visual defects and workmanship. The burnishers shall be visually examined for defects as outlined in table III.

TABLE III. DEFECTS LIST

Design	Not as specified (see 1.2.1)
Material	Not as specified (see section 3)
Finish	Not as specified (see 3.2)
Coating	Not as specified (see 3.2.1)
Workmanship	Not as specified (see 3.5)

4.2.1.1 Examination for dimensional defects. Examination shall be made of the end item to determine compliance with dimensional requirements specified herein. Defects in dimensions shall be smaller or larger than specified.

4.2.2 Examination of preparation for delivery. An examination shall be made to determine compliance with the requirements of section 5. The sample unit shall be one container fully prepared for delivery. Defects shall be scored in accordance with Table IV. Sampling shall be in accordance with MIL-STD-105. The inspection level shall be S-2 with an AQL of 4.0 of percent defective.

TABLE IV. Classification Of Preparation For Delivery Defects

Examine	Defects
Markings (exterior and interior)	Omitted; incorrect; illegible; improper size, location, sequence, or method of application.
Materials	Any component missing, or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping inadequate stapling. Distortion of container.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation, packaging, packing, and marking shall be in accordance with PPP-P-40. The level of preservation, packaging, and packing shall be A or C, as specified (see 6.1).

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

(a) Title, number and date of this specification.
(b) Type and class required (see 1.2.1).
(c) Size required for type II burnishers (see tables I and II).
(d) Level of preservation, packaging, packing required (see 5.1).
(e) Replacement blades, when required (see 6.1.1).

6.1.1 Replacement blades. When procuring replacement blades for type I burnishers, state the applicable blade (see 1.2.2). Six blades of the same kind shall be packaged in an envelope or similar interior container.

PREPARING ACTIVITY

GSA - FSS

U.S. GOVERNMENT PRINTING OFFICE : 1988 - 181-251/73215

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.